


Step-by-step plan for choosing the correct ceiling unit

The following 5-step plan helps you find your way in choosing the right Novy ceiling unit.

1. WIDTH OF THE CEILING UNIT

Cooking vapours do not rise straight up but fan out over an angle of between 10 and 15 degrees. For a good result the cooker hood must be at least the full width of the hob. The ceiling units are available in 90 cm, 110 cm, 120 cm and 150 cm.



2. LED LIGHTING

with LED lights



The ceiling unit has dual LED lights for which the colour temperature can be changed from 2.700K (warm white) to 4.000K (neutral white)

- dimmable
- soft on/off

without LED lights



For a minimalist design. To these ceiling units you can connect external lighting (max. 300W), which can be operated through the cooker hood, remote control or InTouch.

3. RECIRCULATION OR OUTLET TO THE OUTSIDE

Recirculation



If extraction to the outside is not an option, you can choose recirculation instead. For ceiling units it is possible to choose

- 3 types of built-in boxes with monoblock filter p. 94-95
- a basic kit, whereby the outlet grille to return the air to the kitchen is provided by the customer.

Cloud has recirculation as standard.

The recirculation accessories can be found on the website.

Duct out



Novy offers a wide range of installation accessories.

4. CEILING UNIT INSTALLATION OPTIONS

The Pure'line ceiling unit can be installed in 2 ways:

- flush-mounted in the ceiling
- in an alcove or a self-constructed chimney

The maximum installation height (between the hob and the underside of the ceiling unit) is 160 cm.

Installation in an alcove or self-constructed chimney

For an efficient operation it is important that the whole construction in which the ceiling unit is installed is at least the same width and depth as the hob. In addition, edging of 5 to 10 cm high will ensure that fewer vapours can escape.



Installation in the ceiling

In this type of installation the ceiling unit is installed in a suspended ceiling and usually covers the entire kitchen. Because the unit is flush with the ceiling, vapours cannot rise higher than the unit itself and are captured along the edges.



Mounting onto the ceiling

The Cloud ceiling unit only needs to be screwed to the ceiling and does not require any opening in the ceiling. Never before has it been this easy to install a cooker hood. Make sure, however, that your ceiling is sufficiently strong.



ADAPTER FOR A FLAT DUCT WITH LIMITED BUILT-IN HEIGHT

If the built-in depth is limited, it is possible to remove the Cubic motor from the ceiling unit. In this situation, an optional adapter can be ordered. The adapter is placed directly on the ceiling unit and connected to a flat rectangular duct. The motor is then installed in a different location. Please note that the entrance to the motor is round.


6830.052 adapter for Pure'line. Outlet direction can be turned to the right, left, front or rear

830.052 adapter for Maxi Pure'line (order 2x). Outlet direction 1x left and 1x right


5. TYPE OF MOTOR

Ceiling unit with a Cubic motor

The integrated Cubic motor offers the necessary flexibility, because the outlet can be rotated in all directions (right, left, front, rear or above).

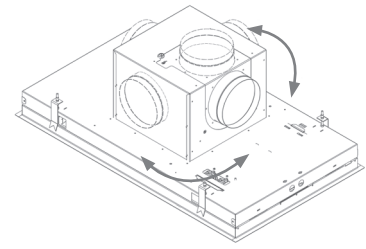


The Cubic motor can also be removed and placed elsewhere in the home. The 4m cable (included) connects the ceiling unit with the motor.

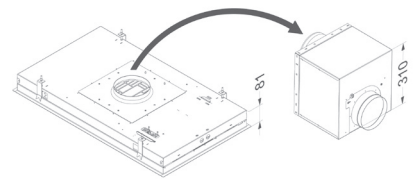


Ceiling unit with compact motor

The ceiling unit, including the compact motor, has a built-in height of only 19,5 cm. The outlet can be turned to the right, left, front or rear. This motor cannot be removed.

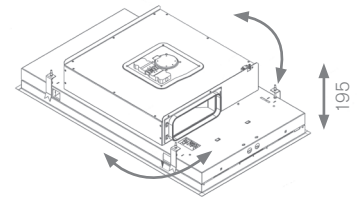


Plafondunit motor not included

Models without a motor are combined with an interior motor, wall-mounted motor or flat roof motor.

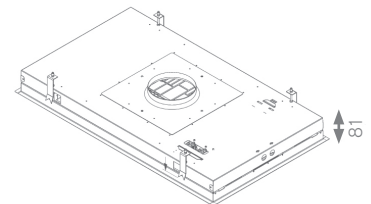

Cloud ceiling unit recirculation as standard

This ceiling unit is equipped with recirculation as standard and needs only to be screwed to the ceiling. It is not necessary create an opening in the ceiling.

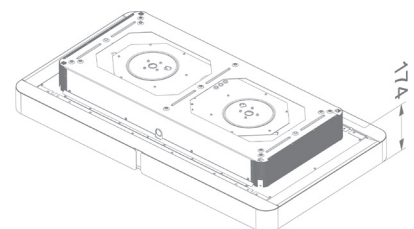

OVERVIEW OF CEILING UNITS

STEP 1	STEP 2	STEP 5
Pure'line 90cm	with LED lights	6810 stainless steel with compact motor 6830 stainless steel with Cubic motor 6835 stainless steel motor not included 6811 white with compact motor 6831 white with Cubic motor 6836 white motor not included 6812 black with compact motor
	without LED lights	6833 stainless steel with Cubic motor 6838 stainless steel motor not included 6834 white with Cubic motor 6839 white motor not included
Pure'line 120cm	with LED lights	6820 stainless steel with compact motor 6840 stainless steel with Cubic motor 6845 stainless steel motor not included 6821 white with compact motor 6841 white with Cubic motor 6846 white motor not included 6822 black with compact motor
	without LED lights	6843 stainless steel with Cubic motor 6848 stainless steel motor not included 6844 white with Cubic motor 6849 white motor not included
Maxi Pure'line 150cm	without LED lights	855 stainless steel motor not included 856 white motor not included
Cloud 110cm	with LED lights	230 white with motor recirculation



Take a look at our Pure'line installation videos.