



Welcome to Novy

For over 50 years, Novy has approached each project with the same goal: to combine quality, craftsmanship and design with the finest materials and expertise to bring silence to your kitchen. Creating enduringly beautiful appliances that perform day after day, year after year, all Novy products are supplied with a 2+3 years parts and labour warranty.

Enhanced by the trend for open plan living, extraction and surface cooking itself has become a defining feature of the modern kitchen. Novy provides subtle, elegant and high design statement products that always complement the architectural character of the space. We believe a beautifully designed and crafted kitchen is a statement of quality and there is no better way to make a lasting impression than with Novy. Novy is for every kitchen where performance matters, whether your home is a rural retreat or modern city sleek.

5
YEARS
WARRANTY

5 years warranty



2 year manufacturer warranty and extra 3 year warranty after registerion on www.novy.com/en-gb/service/information/register-your-device. This covers all the costs of any repair (parts, call out fees and labour) on Novy cooker hoods, worktop extractors, induction hobs, gas burners and design lighting. You do not need to sign a maintenance agreement or contract for this, all you have to do is register.

Price list

View the
current price
list here



* The warranty period begins on the date of purchase (billing date). If no invoice can be presented, the date of production shall apply. You can find the full terms and conditions on www.novy.com/en-gb.
Novy Ltd does not cover expenses or consequential losses that may incur. The warranty provision excludes accidental damage and misuse.

Novy, your kitchen's secret ingredient

02



ABOUT
NOVY

Cooker hood guidelines

26



COOKER
HOOD
GUIDELINES

Venting hobs

38



VENTING
HOBS

Ceiling units

84



CEILING
UNITS

Built-in cooker hoods for deep cabinets

132



BUILT-IN
COOKER
HOODS

Telescopic cooker hoods for shallow cabinets

150



TELESCOPIC
COOKER
HOODS

Wall-mounted cooker hoods

174



WALL-
MOUNTED
COOKER
HOODS

Island cooker hoods

194



ISLAND
COOKER
HOODS

Cooker hood accessories

222



COOKER
HOOD
ACCESSORIES

Induction hobs

234



HOBS

Gas hobs

274



GAS HOBS

Designer lighting

280



DESIGNER
LIGHTING

Info

302



INFO

Welcome to the world of Novy

With a rich history and more than 110 years on the clock, Novy has since become a leading brand specialising in high-quality cooker hoods hobs and designer lighting for kitchens and living rooms.

NOVY

When 'good' is simply not enough and only 'the best' will do, Novy brings you advanced, whisper-quiet and efficient worktop extractors and fume hoods. Years of craftsmanship and persistent innovation are our absolute driving forces. From the beginning, the highest standards were set in terms of design, ease of use, durability and, of course, silence. We also offer an exclusive collection of designer lighting, equipped with pioneering and award-winning control technology and perfectly matched to our innovative worktop extractor.

Novy products exude quality and contemporary minimalism and are still developed and manufactured with extreme precision and according to strict quality standards at our facility in West Flanders, Belgium. Today, our products still stand for quality, craftsmanship and innovation. Several products have already won international awards such as Red Dot Award, iF Design Award, Kitchen Design Award, etc.

We are also proud to be part of the Middleby family. In addition to leading brands such as AGA, La Cornue, Rangemaster and Viking, Novy now also belongs to Middleby Residential, a division of The Middleby Corporation.

Middleby Residential

Middleby Corporation, a world leader in foodservice equipment, through its various brands and strategic acquisitions, has an extensive portfolio that includes not only residential kitchen equipment, but also commercial and industrial equipment for food preparation, processing, cooking and baking.

Middleby Residential targets the premium kitchen equipment market and offers a wide range of innovative, high-quality appliances for residential kitchens. Its products integrate advanced technology and design and target the premium segment of the market.

Some of Middleby Residential's brands include :

NOVY
Your kitchen's secret ingredient

VIKING

LA CORNUE

AGA

LYNX

U-LINE

MARVEL

KAMADOJOE

MASTERBUILT

Char-Griller

ēvo

RANGEMASTER

Power, silence and connectivity.

We are the secret ingredient in your kitchen. The silent power of our expertise is incorporated in everything we make. Our cooker hoods and hobs are extremely silent in use and the lighting minimalistic in design, created to bring peace to the heart of your kitchen. Powerful, built with precision and designed so you can comfortably cook, thanks to smart technology that lets your kitchen appliances communicate. Power, silence and connectivity. And all this behind the scenes.

Novy, your kitchen's secret ingredient



POWER


Power is driven by passion. As pioneers, we use this unadulterated energy to push our boundaries further and further. This will to improve, to continue to refine, is for us the basis of everything we create. Every cooker hood, hob and designer lighting is the result of avant-garde technology and years of craftsmanship. Because pure power is what drives us. And that's no different for our appliances.

Novy, your kitchen's secret ingredient

The power you feel but don't see

Performance is always our first goal. The constant question "Can it be done differently and better?" has led to the development of numerous innovations. Whether it's peripheral extraction, adjustable-height extraction, or automatic power regulation – all Novy range hoods are designed to be quieter than cooking sounds, where efficiency and ease of use are just as important. To achieve this, we combine powerful, highly efficient motors in an optimised casing. Whether you choose a classic exhaust system or the energy-saving recirculation version – unpleasant odors are reliably, quietly, and quickly removed from the kitchen.

- High-quality materials and workmanship
- Integrated motor or remote motor
- Innovative extraction
- Multi-layer grease filter
- Extraction or recirculation

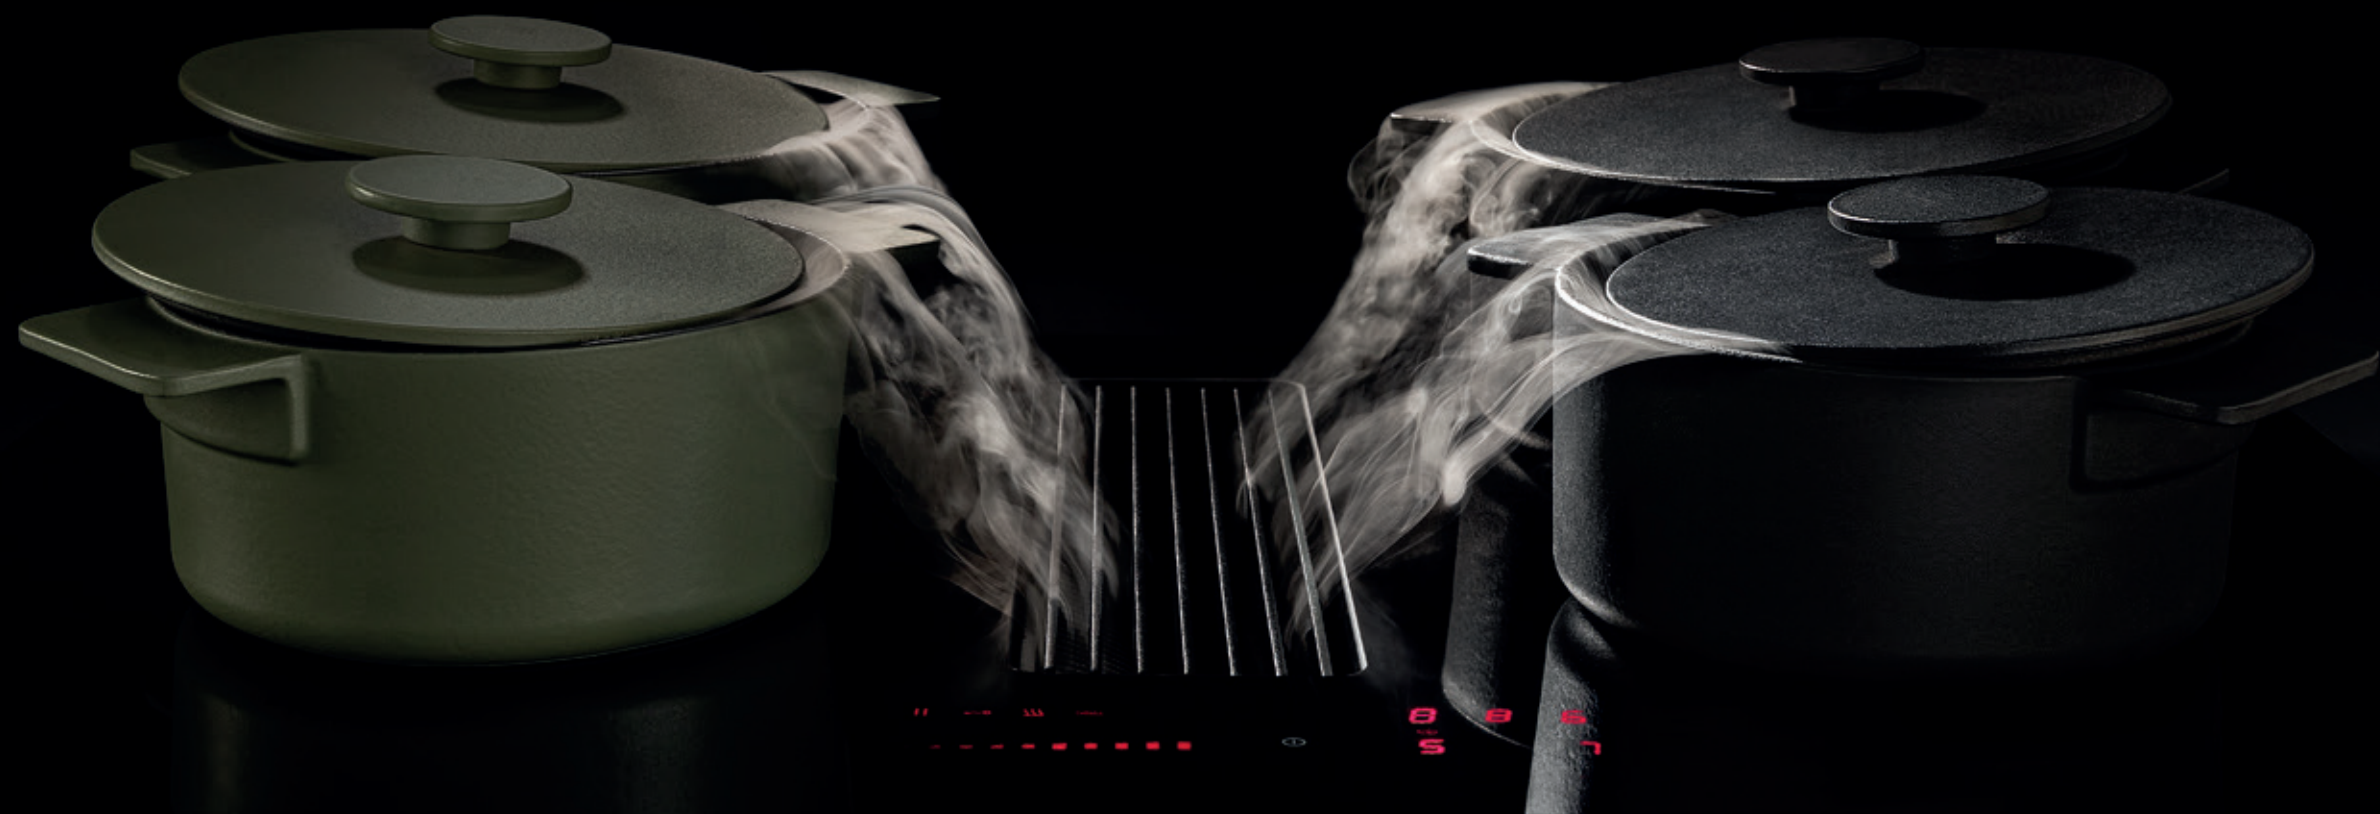



Craftsmanship with a soul

Our strength lies in solid and well-considered work. In extremely silent, yet high-performance motors. In technology, driving to the limit. In wanting to excel. In commitment. But also in our hands.

For us, craftsmanship is the starting point for delivering quality. We share this knowledge and form the connecting factor between pure design, a well-considered choice of sustainable materials and perfect execution. Our thinking is reflected in every cooker hood and hob developed and produced in Belgium.

Because that finesse is what turns cooking into an art.





SILENCE

Silence is what you need to achieve perfection. That's why, at best, there's a whisper in the wings, and why the finishing touch is added to the board with the utmost precision. It's also why our cooker hoods, hobs and designer lighting are remarkably discreet, shrouded in minimalism and visual tranquillity. We make it our mission to make appliances that are ultra-quiet, without disturbing noise. The result is a design that is pure - nothing but the essence - and a cooker hood that is always quieter than what you cook.

Novy, your kitchen's secret ingredient



We bring silence to your kitchen

We bring peace to your kitchen so you can put passion in your cooking. We polish our designs to pure lines that combine subtlety with performance. Discreet, silent and strong in their abstraction. Because for us, every detail is a consideration, every choice made to give you freedom.

We understand the power of subtlety. That is why our designs are resolutely geared towards a calm interplay of lines and an eye for detail. Sophisticated design leads the way, combined with comfort in every action.


Strikingly inconspicuous

Our cooker hoods are designed to be quieter than what you are cooking. We've developed an advanced noise reduction system and a double-walled base plate: optimised aerodynamics that reduce resistance. Therefore: less noise, less distraction and also energy efficient.

- Quiet motor
- Advanced silencing system
- Double-walled insulated base plate
- Ventilation tower with adjustable heights
- Recirculation or ducted to the outside
- Adjustable lighting

Visual perfection



Our desire for perfection translates into appliances that blend in seamlessly with their surroundings. We extend this visual tranquillity into every detail to create the timeless elegance.

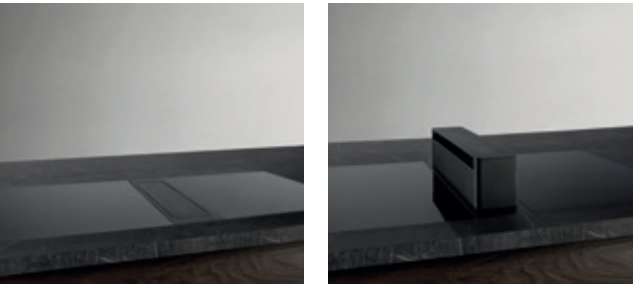



MODERN DESIGN

Novy Mineral Black

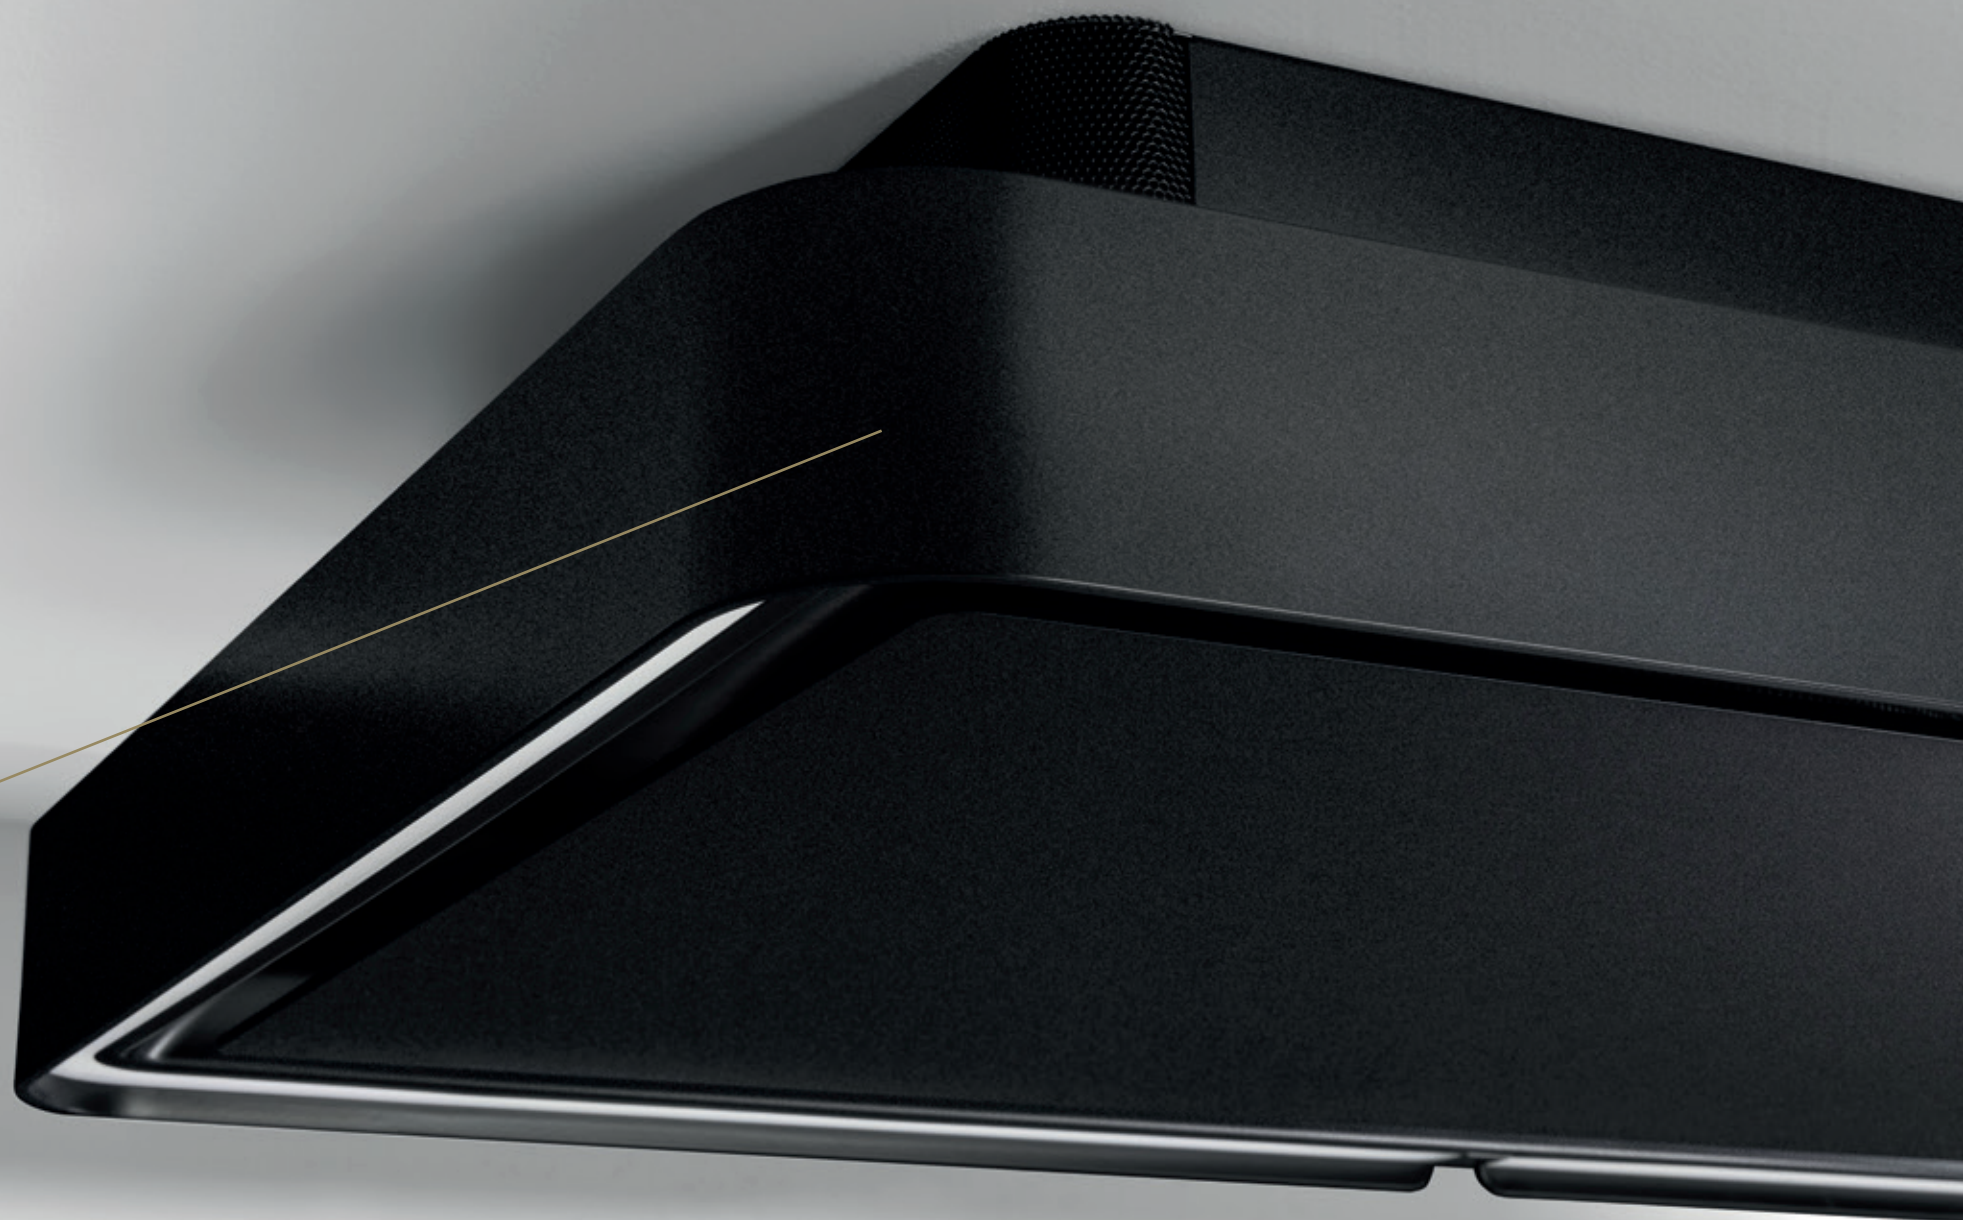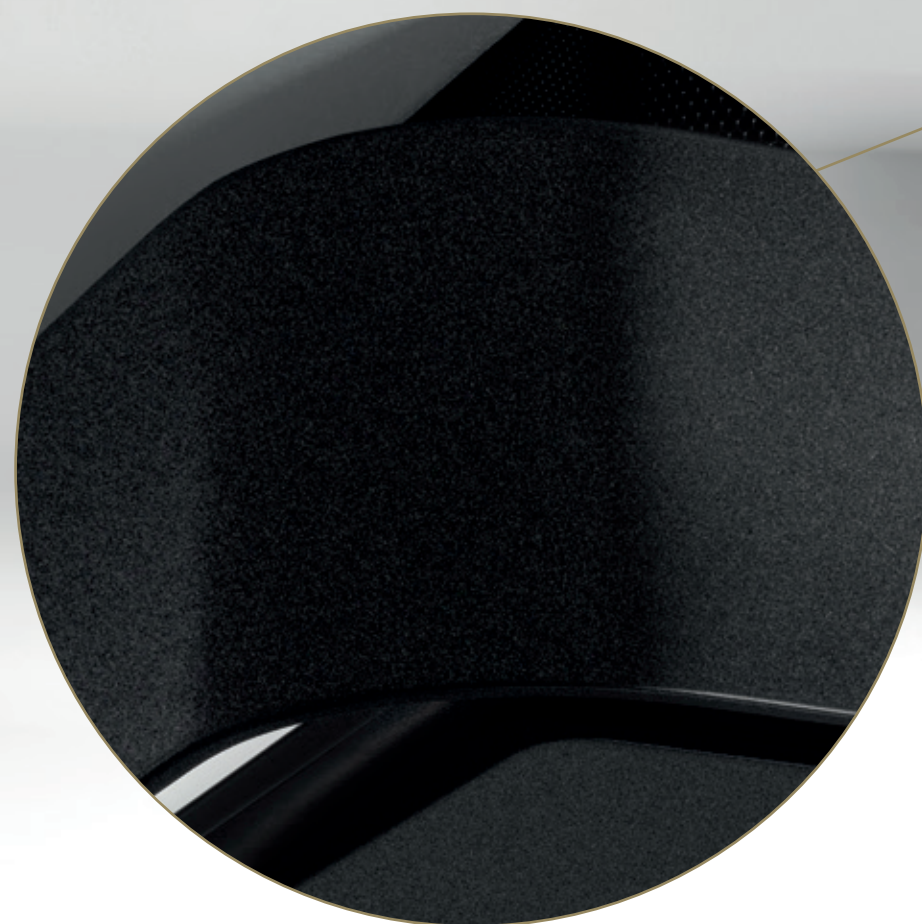

Stylish design effect

Trends come and go in the kitchen, but black will always remain. However, not all black is the same. Mineral Black, a matte black that stands out because of its subtle structure.

Low-maintenance

Besides the aesthetic element, there is also a practical advantage. Thanks to its structure, Mineral Black is very easy to maintain and less sensitive to fingerprints.

The following devices are available in Mineral Black :

- Novy Cloud
- Novy Pureline Pro (Compact)
- Novy Pureline Compact
- Novy Mini Pureline
- Novy Flatline wall-mounted and island
- Novy Pureline Frame
- Novy Phantom
- Novy Mood
- Exhaust boxes
- Designer lighting



MATTE OR GLOSS, SEAMLESSLY COMPLEMENTING
YOUR KITCHEN DESIGN

Two premium finishes

Black gloss glass

The glass is completely opaque, resulting in a sleek, uniform black cooking surface with no visibility into the hob. Its glossy finish creates a premium look that enhances any kitchen interior.

Novy Matte Line glass

The matte glass finish reduces visible fingerprints and signs of use, helping the cooking surface maintain its refined appearance over time.

Light scratches subtly blend into the texture of the matte glass—perfect for those who appreciate a stylish hob that stays looking pristine, even with frequent use.

The following devices are available in Novy Matte Line:

Novy Panorama 90 & 120, Novy Easy 65 & 80, Novy Induction Power, Novy Induction Comfort.



Reduced visibility
of scratches



Reduced visibility
of fingerprints





CONNECT

Intuition is the guiding principle in the kitchen. Our smart technology is designed to let you cook comfortably and to follow your own intuition. By simplifying your life, we give you the freedom to create, to improvise. That's why we continue to refine our technology so that your cooking becomes an experience, a combination of elegance and delicacy. For us, it's all about connection: between people, but also between the cooker hood and hob. Because working together is simply stronger.

Novy, your kitchen's secret ingredient

Connect in a snap


Our smart features let you become one with your kitchen. Thanks to innovative technology, your pots and pans no longer boil over. Moreover, they always stay at the right temperature, even when you move them. And now you're even alerted when your filters need maintenance so you can continue to enjoy optimum performance. That's how Novy becomes the secret ingredient in your kitchen: a smart tool that makes cooking easier for you.

Intuitively operated

As a specialist, we've developed a new generation of cooker hoods and hobs. Efficient and designed with the desire to take your cooking to the next level. Above all, it's intuitive, so every command is at your fingertips. How do we make it happen? With the InTouch technology and the Novy Connect App.

The **InTouch technology** allows you to operate the cooker hood from your induction hob. All functions are at your fingertips: handy, simple and intuitive. Moreover, there is no need for extra cabling.

In the **Novy Connect App**, the communication between cooker hood, hob and yourself becomes more advanced. You can easily adjust the settings regarding extraction and lighting according to your own wishes and needs. Those settings can be saved so that your cooker hood can work in a completely personalised way. What's more, you are guided through the maintenance of the various filters.

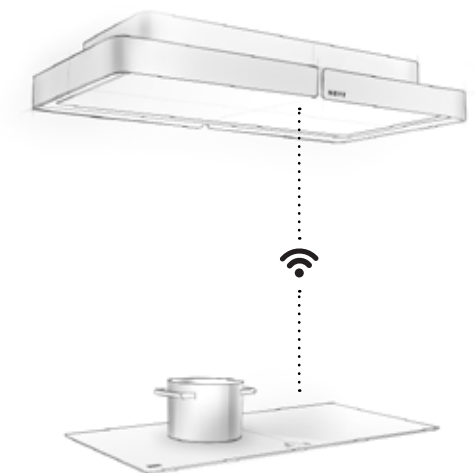

Connectivity matters to us:
between people around the
cooking island, and between the
cooker hood and the hob.

Video
With Novy, you can enjoy the ultimate cooking
experience thanks to the Novy Connect technology.





Pure technology

Using technology to make your life easier, that's our goal. That's why we develop practical applications that immediately improve the quality of your cooking experience. Smart technology knows when you put a pot on the hob, and even when you move it.

Temperature settings ensure that the water does not boil over. This way, cooking becomes pure intuition, a mix of creativity and freedom.

Our recirculation systems are as durable as they are effective. They eliminate the strongest odours from your kitchen without extracting hot air to the outside. This allows you to recover heat and save energy. And it doesn't stop there, a hood with recirculation provides greater flexibility and is easier to install.

- **Intuitive operation**
- **Combined smart technology**
- **Convenient flexzones**
- **Pot Move function**
- **InTouch technology**
- **Pleasant indoor climate**






Cooker hood guidelines

The best extraction solution for your kitchen often depends on the architecture of the property you live in, and the style of cooker hood that suits you and your requirements. The following step-by-step plan will help you select the correct kitchen ventilation solution for you.

Step 1 How wide should your cooker hood be?


Cooking vapours do not rise straight up, but at an angle between 10 and 15 degrees. For proper operation, the cooker hood must be at least the full width of the hob. For an island arrangement, choose a wider model for efficient extraction. The maximum height of your cooker hood also plays a role. These can be found via the symbol  on the product pages.

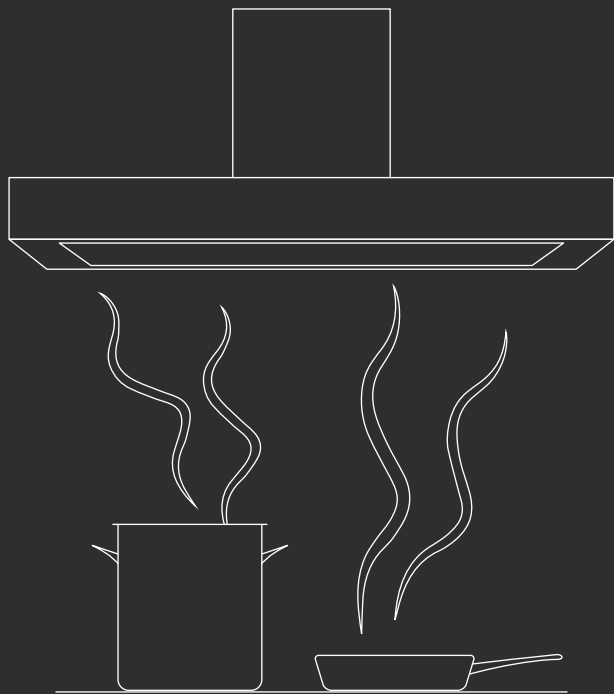

Step 2 Extraction to the outside or recirculation?

The choice between extraction to the outside or recirculation depends on the architecture of your property, your wishes and possibilities. It has a major impact on the installation of the kitchen.

Is extraction to the outside (via the roof or facade) possible?

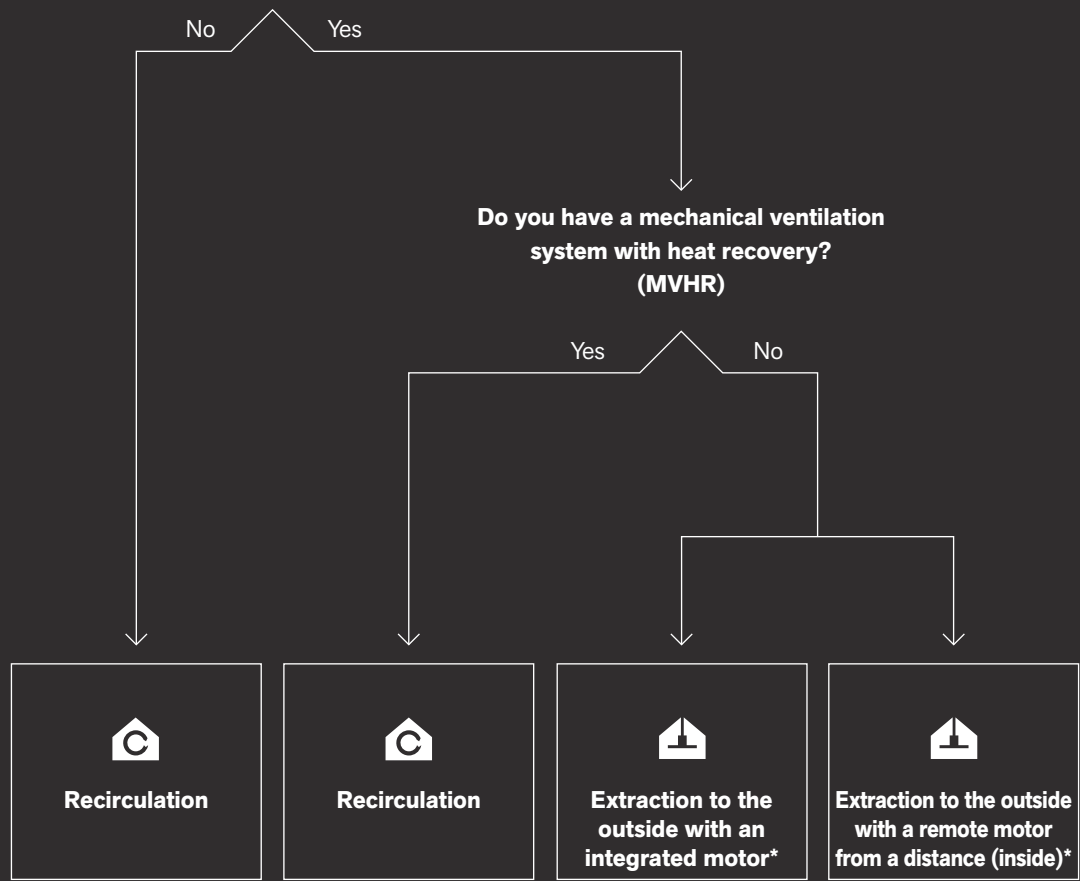

Extraction to the outside is the best solution, but recirculation is an option provided there is sufficient ventilation (to be provided by the customer).

A remote motor enables a limited built-in height for the Pureline and Mini Pureline.

* No outlet without an inlet

A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).



Step 3

Where should
you place the
cooker hood?

How wide
is your hob?



In the worktop



Above a cooking
island



Integrated
in a ceiling or recess



Telescopic
built-in or under
the cabinet



Wall-mounted
with a decorative
cooker hood

65 cm

Venting hobs, see p. 38
Novy Easy 65

Select a cooker hood of at least 90 cm

Ceiling units, see p. 84
Novy Cloud
Novy Maxi Pureline
Novy Pureline (Pro) (Compact)

Island cooker hoods, see p. 194
Novy Phantom Frame & Cable
Novy Pureline Frame
Novy Mood
Novy Flatline

Select a cooker hood of at least 60 cm

Ceiling units, see p. 84
Novy Pureline Pro (Compact)
Novy Pureline (Compact)

Built-in cooker hoods, see p. 132
Novy Mini Pureline
Novy Crystal
Novy Canopy Essence

Select a cooker hood of at least 60 cm

Telescopic cooker hoods, see p. 150
Novy Fusion
Novy Fusion Pro
Novy Telescopic stainless steel
Novy Telescopic Essence

Select a cooker hood of at least 75 cm

Wall-mounted cooker hoods, see p. 174
Novy Vision
Novy Flatline
Novy Salsa

80 cm

Venting hobs, see p. 38
Novy Easy 80

Select a cooker hood of at least 90 cm

Ceiling units, see p. 84
Novy Cloud
Novy Maxi Pureline
Novy Pureline (Pro) (Compact)

Island cooker hoods, see p. 194
Novy Phantom Frame & Cable
Novy Pureline Frame
Novy Mood
Novy Flatline

Select a cooker hood of at least 90 cm

Ceiling units, see p. 84
Novy Pureline Pro (Compact)
Novy Pureline (Compact)

Built-in cooker hoods, see p. 132
Novy Mini Pureline
Novy Crystal
Novy Canopy Essence

Select a cooker hood of at least 90 cm

Telescopic cooker hoods, see p. 150
Novy Fusion
Novy Fusion Pro
Novy Telescopic stainless steel
Novy Telescopic Essence

Select a cooker hood of at least 90 cm

Wall-mounted cooker hoods, see p. 174
Novy Vision
Novy Flatline
Novy Salsa

90 cm

Venting hobs, see p. 38
Novy Easy 90 Prestige
Novy Panorama 90
Novy Up

Select a cooker hood of at least 100 cm

Ceiling units, see p. 84
Novy Cloud
Novy Maxi Pureline
Novy Pureline (Pro) (Compact)

Island cooker hoods, see p. 194
Novy Phantom Frame & Cable
Novy Pureline Frame
Novy Mood
Novy Flatline

Select a cooker hood of at least 100 cm

Ceiling units, see p. 84
Novy Pureline Pro (Compact)
Novy Pureline (Compact)

Built-in cooker hoods, see p. 132
Novy Mini Pureline
Novy Crystal
Novy Canopy Essence

Select a cooker hood of at least 90 cm

Telescopic cooker hoods, see p. 150
Novy Fusion
Novy Fusion Pro
Novy Telescopic stainless steel
Novy Telescopic Essence

Select a cooker hood of at least 90 cm

Wall-mounted cooker hoods, see p. 174
Novy Vision
Novy Flatline
Novy Salsa

100 cm

Select a cooker hood of at least 120 cm

Ceiling units, see p. 84
Novy Maxi Pureline
Novy Pureline (Pro) (Compact)

Island cooker hoods, see p. 194
Novy Phantom Frame & Cable
Novy Pureline Frame
Novy Flatline

Select a cooker hood of at least 120 cm

Ceiling units, see p. 84
Novy Pureline Pro (Compact)
Novy Pureline (Compact)

Select a cooker hood of at least 100 cm

Telescopic cooker hoods, see p. 150
Novy Fusion Pro

Select a cooker hood of at least 120 cm

Wall-mounted cooker hoods, see p. 174
Novy Flatline

≤ 120 cm

Venting hobs, see p. 38
Novy Panorama 120

Select a cooker hood of at least 150 cm

Ceiling units, see p. 84
Novy Maxi Pureline

Select a cooker hood of at least 150 cm

Ceiling units, see p. 84
Novy Maxi Pureline

Select a cooker hood of at least 120 cm

Telescopic cooker hoods, see p. 150
Novy Fusion Pro

Select a cooker hood of at least 120 cm

Wall-mounted cooker hoods, see p. 174
Novy Flatline

COOKER HOOD NOVY

Silent power in the kitchen



The best cooker hood is one that does not attract unnecessary attention. Its inconspicuousness is what turns it into a small secret. Cleanly designed, quiet, and technologically advanced. Tranquillity itself.

- **Silent motor**
- **Extensive soundproofing**
- **Purified indoor air**

Progressive design

The ultimate package for the best results. That's the Novy cooker hood. Its high-performance technology ensures efficient extraction of cooking fumes and odours. The motor is also equipped with a sound-absorbing system and the finish is the highest quality. Most of all, the design is discreet and beautiful.

Smart functions



InTouch

Operate your cooker hood from your induction hob with wireless RF communication.

Variable lighting

Customise the lighting: vary between warm and cold tones and dim when you want. The soft on/off button gradually turns the light on or off.

A rule of thumb for a good ducting

Ducting is crucial for the functioning of a cooker hood with outward air extraction, and in some cases, with recirculation too. The key to optimum efficiency and silent operation is choosing the right materials.

Here are a few points to consider

Short and powerful

A cooker hood loses suction capacity with each additional metre of ducting. That is why you should keep the ducting as short as possible. Generally speaking, flat channel ducting should be no more than 13 metres long and have a diameter of 150 mm or flat channel ducting of 222x89 mm.. In addition, each 90-degree bend in the ducting is equivalent to an extra 3 metres of ducting, and each 45-degree bend is equivalent to an extra 2 metres.

Example 1:

If a 90° bend and a 45° bend are used, the straight exhaust duct may be a maximum of 8 metres long ($13-3-2=8$)



Maximum 13 metres



90° bend: minus 3 metres



45° bend: minus 2 metres

Example 2 (Drawing see p. 33):

If two 90° bends are integrated into the exhaust duct, the straight duct may be max. 7 metres long ($13-3-3=7$)




Maximum 13 metres



90° bend: minus 3 metres



90° bend: minus 3 metres

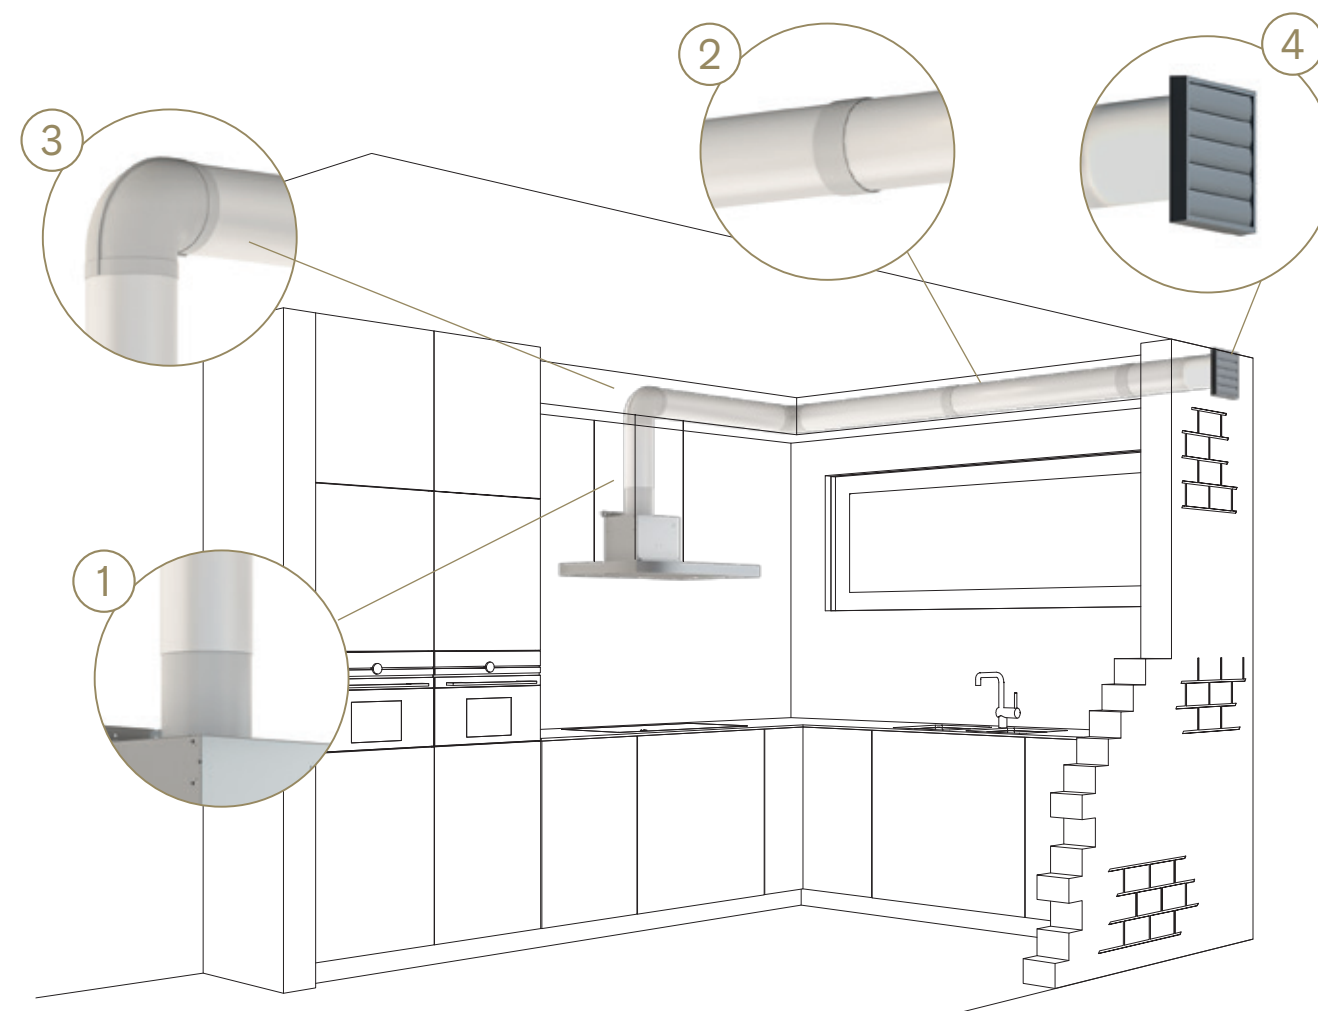

The perfect diameter

The ducting should have the same diameter as the connection on the cooker hood. You should limit the use and length of flexible ducting hoses as far as possible and extend hoses as far as possible. (1)

Absolutely airtight

Tape or a hose clamp are the perfect tools for making ducting completely airtight. (2)

Good air conduction

Corners or bends in ducting impact the conduction of air. Rounded bends promote good air conduction whereas squared-off bends have the opposite effect. (3)

An external wall grille is essential

An external grille that allows sufficient air to pass through promotes optimum air conduction. It also means the cooker hood is silent and efficient. (4)

Ensure an adequate supply of air

Whether the kitchen is compact or spacious, the quantity of air extracted can never be greater than the quantity of air supplied. In other words, if you do not have an adequate supply of air, the cooker hood will work less efficiently even when it is recirculating air.


Pure kitchen air

Every kitchen is unique. The way cooking vapours are extracted plays a decisive role in both indoor climate and energy consumption. That is why Novy offers not only extraction systems with external extraction, but also advanced recirculation solutions.

External extraction

Novy's ducted extraction solution effectively removes cooking vapours outside. The air, containing odours, moisture, and grease particles, is first drawn through the grease filter in the cooker hood, where the grease is retained. The remaining air is then extracted outdoors via a duct – ensuring that all odours and humidity are completely eliminated from the kitchen.



- Extraction of cooking vapours outdoors through a ducting system
- High efficiency
- Ideal for living spaces without an integrated ventilation system

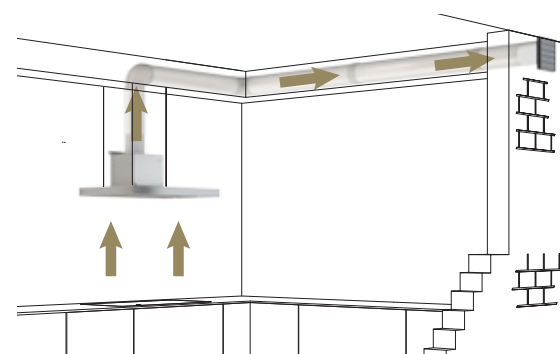


Recirculation Technology

Novy's recirculation technology ensures exceptionally thorough air purification. The air, containing cooking odours, moisture, and grease particles, is first drawn through the grease filter. The high-quality recirculation filter then removes the odour molecules. The purified air is returned to the room without any heat loss.

- Filtered air is returned to the room
- Effective odour filtration
- Energy-efficient
- Greater design freedom in kitchen planning
- Ideal for living spaces with an integrated ventilation system

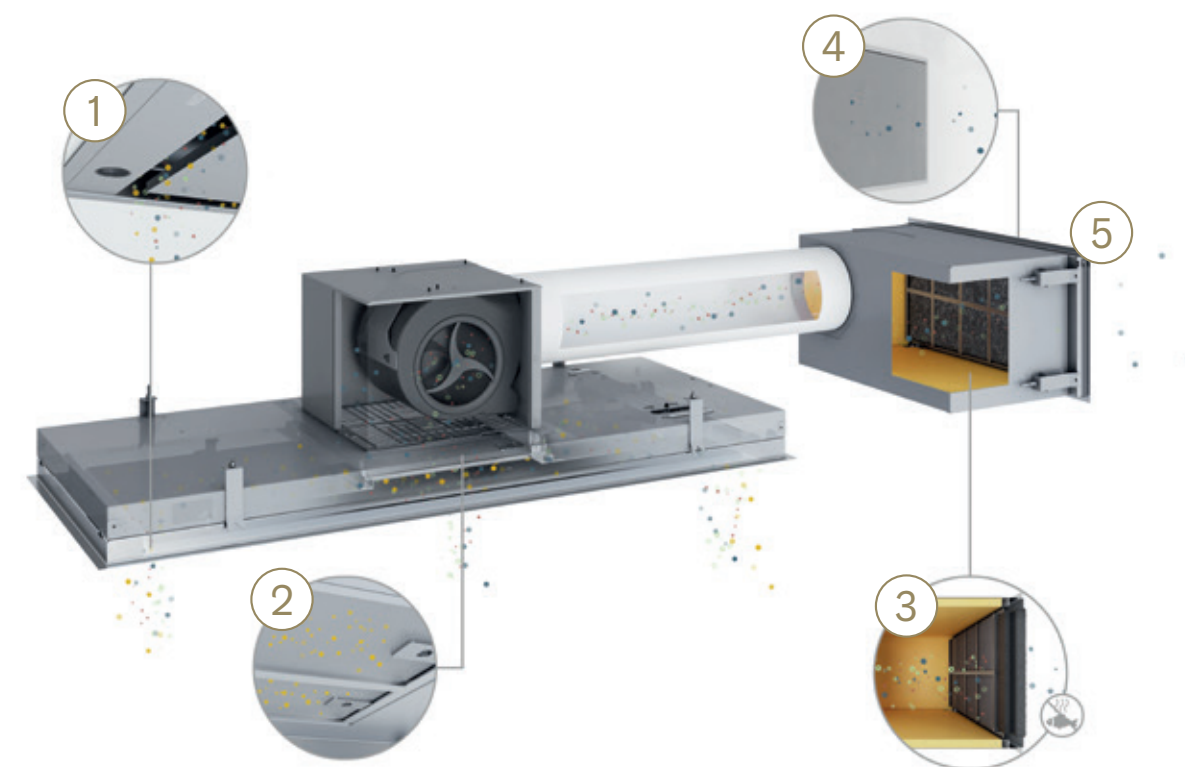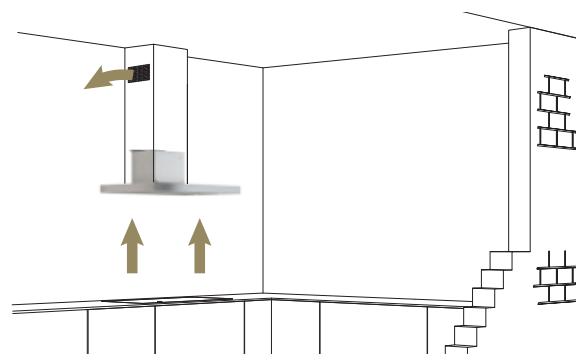

- 1 Cooking vapours are immediately extracted thanks to the **high-performing, silent motor**.
- 2 The efficient **multilayer grease filter** captures all the grease particles that are released during cooking.
- 3 The carbon particles in the **monoblock filter** have a natural coating, exclusively made by Novy. This neutralises the strongest odours - even fish - up to 97%.
- 4 The **closed, sound-absorbing airflow system** accompanies the hot cooking fumes and prevents moisture from accumulating in the ceiling or cabinet.
- 5 The purified hot air is reintroduced into the kitchen, which guarantees **perfect recirculation** and heat recovery.

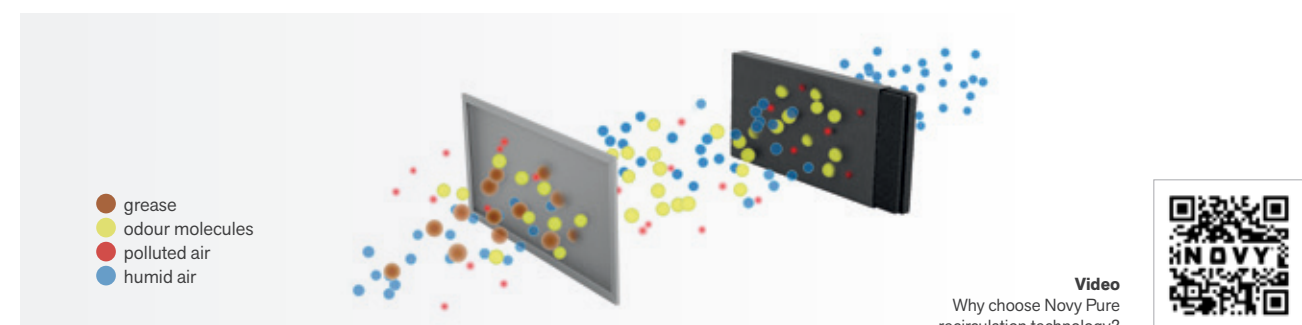



RECIRCULATION

Different recirculation filters

Monoblock



The Novy Monoblock filter neutralises even the most persistent cooking odours — including fish — up to 97%. Thanks to Novy's extra natural coating layer and active carbon particles, this filter delivers exceptional performance. Its labyrinth structure ensures optimal airflow and maximum odour absorption — even in conditions of high humidity. With an average lifespan of 450 to 900 cooking hours (depending on the model, approximately 3 to 5 years), this filter provides long-lasting performance with minimal effort and low replacement costs.

Extra anti-fish filter layer

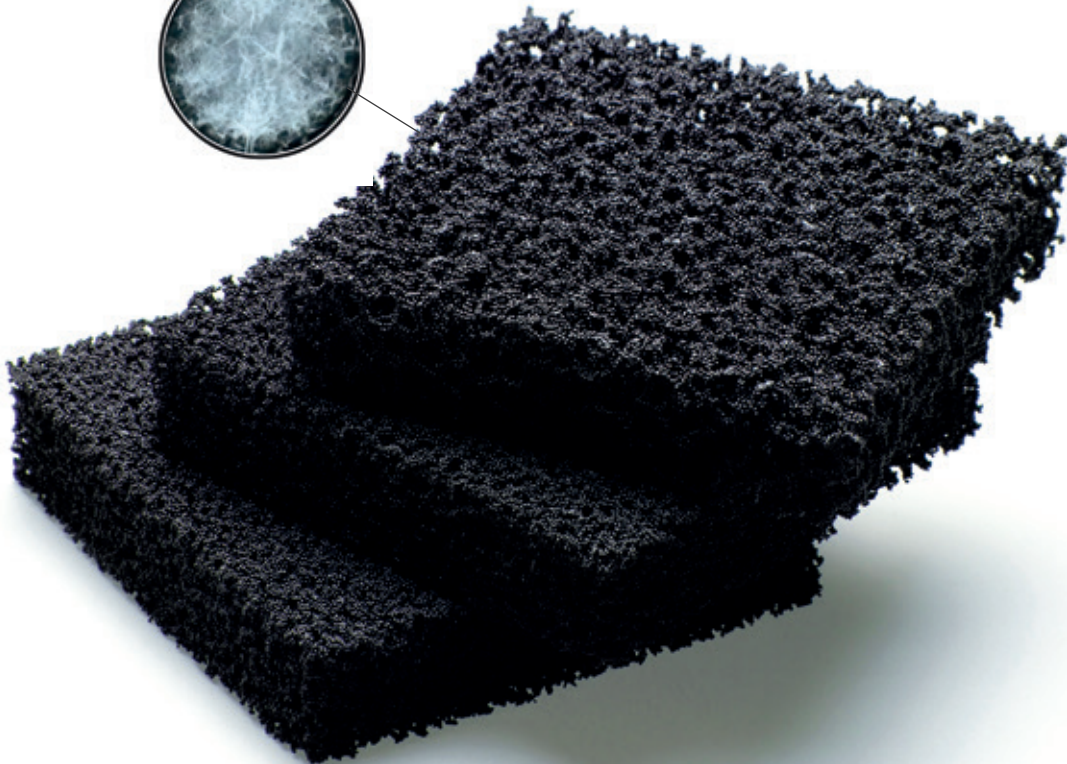

Pure Comfort

The Pure Comfort filter removes up to 90% of all cooking odours, thanks to its enlarged filter surface. This ensures long-lasting, efficient air circulation with low pressure resistance. With an average lifespan of 300 cooking hours (approx. 1–2 years), this filter combines sustainable performance with low replacement costs.

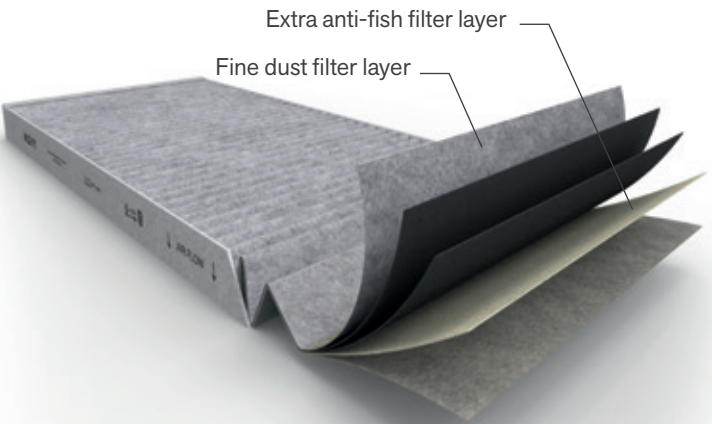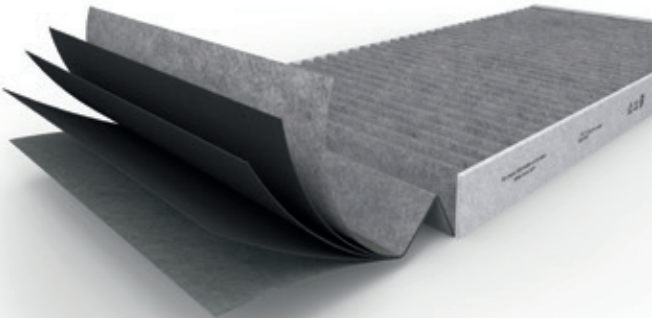

Pure Finesse

The Pure Finesse filter offers even better performance as the Pure Comfort, thanks to the additional anti-fish filter layer and fine dust filtration. This means that not only are cooking odours reliably removed, but also fine dust particles, pollen and allergens are filtered from the air. With an average lifespan of 150 cooking hours (approx. 6 to 12 months), this filter is the ideal choice for those who value healthy indoor air quality.

Carbon cartridges

Activated carbon cartridges effectively filter cooking vapours from the air. With an average lifespan of around 120 cooking hours (approx. 6 months), they are easy to replace — ensuring consistently reliable performance.



Filter type	Odour elimination	Absorption of fish odours	Cooking hours	Fine dust filtration	Product range
Monoblock recirculation filter	Up to 97%	***	900	No	All models with recirculation function (except those listed below)
Monoblock recirculation Easy	Up to 95%	***	450	No	Novy Easy
Pure Finesse recirculation filter	Up to 95%	***	150	Yes	Novy Easy (except Novy Easy Prestige)
Pure Comfort recirculation filter	Up to 90%	**	300	No	Novy Easy (except Novy Easy Prestige)
Carbon cartridges	Up to 60%	*	120	No	Novy Salsa, Novy Telescopic Essence, Novy Canopy Essence



Venting hobs

Novy
Panorama 90



Novy
Panorama 120



Novy
Easy 65



Novy
Easy 80



Novy
Easy 90
Prestige



Novy
Up



Cooking profile

Use	  	  	 /  	 /  	 /  	 
Maximum height of cooking pots without lids	up to 28 cm	up to 28 cm	up to 10 cm	up to 10 cm	up to 10 cm	up to 15 cm

Finish

Colour glass	Glossy black / Matte black	Glossy black / Matte black	Glossy black / Matte black	Glossy black / Matte black	Glossy black	Glossy black
--------------	----------------------------	----------------------------	----------------------------	----------------------------	--------------	--------------

Width (incl. hob) (cm)

Dimensions	88	118	65	80	90	49 (incl. 1 Domino hob) 87 (incl. 2 Domino hobs) 136 (incl. 3 Domino hobs) 174 (incl. 4 Domino hobs)
------------	----	-----	----	----	----	---

Number of cooking zones

2						
3						
4						
5						
6						
8						
						

Adjustable height of the extraction tower (cm)

Height	Freely adjustable (10 - 30) p. 42	Freely adjustable (10 - 30) p. 48	0 p. 54	0 p. 60	0 p. 68	0 / 10 p. 76
--------	---	---	-------------------	-------------------	-------------------	------------------------

 Normal use, basic cooking functions

 Normal use, extensive cooking functions

 Intensive use, extensive cooking functions



Optimal efficiency of vented hobs

With downdraft extraction without a tower, cooking fumes are efficiently extracted downwards up to a pot height of 10 cm. Downdraft extraction with a tower, such as Novy Panorama, goes even further: the adjustable tower captures fumes directly next to the pot, up to a height of 28 cm.



for pots of
up to 10cm



for pots of
up to 28cm



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Panorama 90

- **Efficient source extraction:** tower height adjustable to 10, 20, and 30 cm, as well as variable.
- **Versatile extractor tower:** Semi-transparent and functions as a splash guard.
- **Three or four cooking zones** for optimal cooking convenience.
- **Timeless design:** stylish and functional downdraft extraction.
- **Easy maintenance:** quick and simple to clean.
- **Flexible installation:** Surface or flush mount
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours.

- **Matte Line design (1821-g1):**
 - **Matt black glass** for a contemporary look.
 - **Durable finish** with fewer visible signs of use.
 - **White controls** for a premium appearance.



Tower exhaust system
Optimal extraction at the height of the pots



Flexzone
Automatic or manual bridge function of two cooking zones.



Recirculation
Recirculation is optional.



Novy Connect
Operation and settings possible via smartphone or tablet.



1821,
1821-g1



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc
Inductiekookplaat Venting induction hob Pro	88×52	4		4 × 200×240	4 × 3700	Glossy black	1821	£4,694
Venting induction hob Pro	88×52	4		4 × 200×240	4 × 3700	Matte black	1821-g1	£4,899
Venting induction hob Power	88×52	3		Ø280, 2 × 200×240	2 × 3000, 1 × 1850	Glossy black	1831	£4,214
Venting induction hob Power	88×52	4		Ø185, Ø210 2 × 200×240	1 × 1400, 2 × 3000, 1 × 1850	Glossy black	1841	£4,329

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	81	B	691	37	57

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Panorama 90



Technical specifications

	Novy Panorama 90 1821 / 1821-g1	Novy Panorama 90 1831	Novy Panorama 90 1841
Finish			
Colour glass	1821 Glossy black 1821-g1 Matte black	Glossy black	Glossy black
Type of controls hob	Slider touch control	Touch control	Touch control
Type of controls cooker hood	Slider touch control / Novy Connect	Touch control / Novy Connect	Touch control / Novy Connect
Control Colour	White	Red	Red
Finish	Round border	Round border	Round border
Installation options			
Extraction	▪	▪	▪
Recirculation	▪ (default setting)	▪ (default setting)	▪ (default setting)
Recirculation options	Exhaust box (See p. 47)	Exhaust box (See p. 47)	Exhaust box (See p. 47)
Surface / Flush	▪ / ▪	▪ / ▪	▪ / ▪
Induction hob functions			
Number of power levels	9 + Power + Super Power	9 + Power	9 + Power
Automatic pot detection	▪	▪	▪
Flexzones	▪ (2 ×)	▪ (1 ×)	▪ (1 ×)
Automatic bridge function Flexzone	▪	▪	▪
Manual bridge function Flexzone	▪	▪	▪
Stop & Go	▪	▪	▪
Safety lock hob	▪	▪	▪
Timer on each zone	▪	▪	▪
Count-up timer	▪	▪	▪
Automatic cooking	▪	▪	▪
Keep-warm function (°C)	42, 70 and 94°	▪	▪
Grill function	▪	▪	▪
Cooking zones			
Cooking zone 1	Left	Left	Left
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	Ø 280 / 2300 (3000)	Ø 185 / 1100 (1400)
Cooking zone 2	Left central	Central	Left central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 2100 (3000)	Ø 210 / 2300 (3000)
Cooking zone 3	Right central	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 1600 (1850)	200×240 / 2100 (3000)
Cooking zone 4	Right	Right	Right
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3700)	200×240 / 1600 (1850)	200×240 / 1600 (1850)
			
Cooker hood functions			
Preset extraction function	▪	▪	▪
Manual suction function	▪	▪	▪
Number of speed settings	5+ 3 intensive	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	▪	▪	▪
Cleaning indicator for recirculation filter	▪	▪	▪
Safety lock cooker hood	▪	▪	▪
Extraction height tower (cm)	10 / 20 / 30	10 / 20 / 30	10 / 20 / 30
Extraction height tower freely adjustable	▪	▪	▪
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards	2 up, 2 downwards
Dimensions (mm)			
Dimensions device (W×D×H)	880×520×65	880×520×65	880×520×65
Dimensions cooker hood (W×D×H)	818×165×760–840	818×165×760–840	818×165×760–840
Exhaust opening diameter	89×222	89×222	89×222
Exhaust position	Central under (rear/front)	Central under (rear/front)	Central under (rear/front)
Opening	See p. 272-273	See p. 272-273	See p. 272-273
Technical characteristics			
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	50.1	50.1	50.1
Electrical connection value cooker hood (W)	250	250	250
Electrical connection value induction hob (W)	7400	6700	7400
Supply voltage	2 power supplies	2 power supplies	2 power supplies
Cooker hood	230 V	230 V	230 V
Induction hob	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N


Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
1821, 1821-g1	Integrated motor	1160	193 / 40	475 / 204	691 / 437	27 / 37	46 / 57	56 / 65
1831	Integrated motor	1160	193 / 40	475 / 204	691 / 437	27 / 37	46 / 57	56 / 65
1841	Integrated motor	1160	193 / 40	475 / 204	691 / 437	27 / 37	46 / 57	56 / 65

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

Novy Panorama 90	
1821 / 1821-g1 / 1831 / 1841	

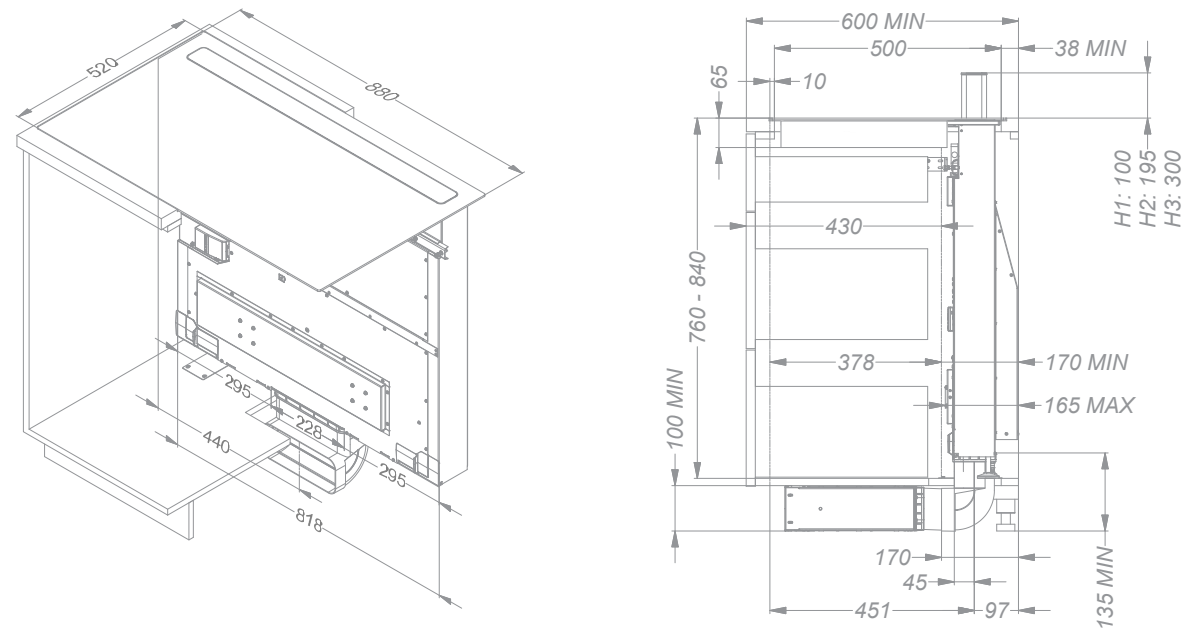

Comment
Built-in lower cabinet from 90 cm without post and with removable back plate.
If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.

Video
Installation video



Accessories

	Reference	Price/pc	1821	1821-g1	1831	1841
Miscellaneous						
Grease filter left	1821.510	£89	•	•	•	•
Grease filter right	1821.515	£89	•	•	•	•
Side profiles kit for hob (Stainless steel)	1700.092	£69	•	•	•	•
Side profiles kit for hob (Mineral Black)	1700.088	£69	•	•	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•		
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•		
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•		
Lid for roaster (1700.099)	1700.100	£100	•	•		
Installation kit for cabinet	1821.400	£159	•	•	•	•
Input / output module	990.036	£204	•	•	•	•

1821.510



1821.515



1700.092



1700.093



1700.095



1700.099 + 1700.100



1821.400



990.036





Accessories

	Reference	Price/pc	1821	1821-g1	1831	1841
Recirculation with exhaust box						
Built-in box (98 mm high) with monoblock filter (818×289×98 mm)						
White (≈RAL 9003)	7921.400	£459	•	•	•	•
Mineral Black (≈RAL 9005)	7922.400	£459	•	•	•	•
Grey (≈RAL 7030)	7923.400	£459	•	•	•	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•	•	•	•
Technical details recirculationboxes see p. 226-227						

7921.400



7922.400



7923.400



7910.055



Video
Video recirculation





Drawer of 40 cm possible with a cabinet of 60 cm



Drainage of the outside



Recirculation



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Panorama 120

- **Efficient source extraction:** tower height adjustable to 10, 20, and 30 cm, as well as variable.
- **Versatile extractor tower:** Semi-transparent and functions as a splash guard.
- **Four or five cooking zones** for optimal cooking convenience.
- **Timeless design:** stylish and functional downdraft extraction.
- **Easy maintenance:** quick and simple to clean.
- **Flexible installation:** Surface or flush mount
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours.

- **Matte Line design (42120-g1):**
 - **Matt black glass** for a contemporary look.
 - **Durable finish** with fewer visible signs of use.
 - **White controls** for a premium appearance.

	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc
Venting induction hob Pro	118×52	4	Ø280, Ø230, 2× 200×240	4× 3000	7400 *	Glossy black	42110	£5,089
Venting induction hob Pro	118×52	5	Ø280, 4× 200×240	5× 3000	10400 *	Glossy black	42120	£5,299
Venting induction hob Pro	118×52	5	Ø280, 4× 200×240	5× 3000	10400 *	Matte black	42120-g1	£5,599

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	110	B	1009	35	61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

* Standard power setting but can be adjusted if required, see technical characteristics next page.

Novy Panorama 120 / Venting hobs



48 – 49



Tower exhaust system
Optimal extraction at the height of the pots.



Flexzone
Automatic or manual bridge function of two cooking zones.



Recirculation
Recirculation is optional.



Novy Connect
Operation and settings possible via smartphone or tablet.



Video
Novy Panorama 120



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOBS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOBS



GAS HOBS



DESIGNER
LIGHTING



INFO

Technical specifications

	Novy Panorama 120 42110	Novy Panorama 120 42120 / 42120-g1
Finish		
Colour glass	Glossy black	42120 Glossy black 42120-g1 Matte black
Type of controls hob	Slider touch control	Slider touch control
Type of controls cooker hood	Slider touch control / Novy Connect	Slider touch control / Novy Connect
Control Colour	White	White
Finish	Round border	Round border
Installation options		
Extraction	•	•
Recirculation	• (default setting)	• (default setting)
Recirculation options	Exhaust box (See p. 53)	Exhaust box (See p. 53)
Surface / Flush	• / •	• / •
Induction hob functions		
Number of power levels	9 + Power + Super Power	9 + Power + Super Power
Automatic pot detection	•	•
Flexzones	• (1 ×)	• (2 ×)
Automatic bridge function Flexzone	•	•
Manual bridge function Flexzone	•	•
Stop & Go	•	•
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Automatic cooking	•	•
Keep-warm function (°C)	70°	70°
Count-up timer	•	•
Grill function	•	•
Cooking zones		
Cooking zone 1	Left	Left
Dimensions (mm) / Power (Boost) W	Ø 280 / 2300 (3000)	200×240/ 2100 (3000)
Cooking zone 2	Left central	Left central
Dimensions (mm) / Power (Boost) W	Ø 230 / 2300 (3000)	200×240/ 2100 (3000)
Cooking zone 3	Right central	Central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	Ø 280 / 2300 (3000)
Cooking zone 4	Right	Right central
Dimensions (mm) / Power (Boost) W	200×240 / 2100 (3000)	200×240/ 2100 (3000)
Cooking zone 5		Right
Dimensions (mm) / Power (Boost) W		200×240/ 2100 (3000)
		
Cooker hood functions		
Preset extraction function	•	•
Manual suction function	•	•
Number of speed settings	5+ 3 intensive	5+ 3 intensive
Run-on timer (min.)	10-30 (default setting)	10-30 (default setting)
Cleaning indicator for grease filter	•	•
Cleaning indicator for recirculation filter	•	•
Safety lock cooker hood	•	•
Extraction height tower (cm)	10 / 20 / 30	10 / 20 / 30
Extraction height tower freely adjustable	•	•
Collection container for cleaning	2 up, 2 downwards	2 up, 2 downwards
Dimensions (mm)		
Dimensions device (W×D×H)	1180×520×65	1180×520×65
Dimensions cooker hood (W×D×H)	1100×162×760–840	1100×162×760–840
Exhaust opening diameter	89×222	89×222
Exhaust position	2× Central under (rear/front)	2× Central under (rear/front)
Opening	See p. 272-273	See p. 272-273
Technical characteristics		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	56.0	56.4
Electrical connection value cooker hood (W)	450	450
Electrical connection value induction hob (W)	7400, 5750 - 1400	10400, 7400 - 1400
Supply voltage	2 power supplies	2 power supplies
Cooker hood	230 V	230 V
Induction hob	230 V / 400 V - 1N / 2N	230 V / 400 V - 1N / 2N / 3N

Air quantity and sound level


		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
Type			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
42110	Integrated motor	1530	237 / 28	689 / 191	1009 / 416	22 / 35	48 / 61	56 / 70
42120, 42120-g1	Integrated motor	1530	237 / 28	689 / 191	1009 / 416	22 / 35	48 / 61	56 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

Nový Panorama 120

42110 / 42120 / 42120-g1

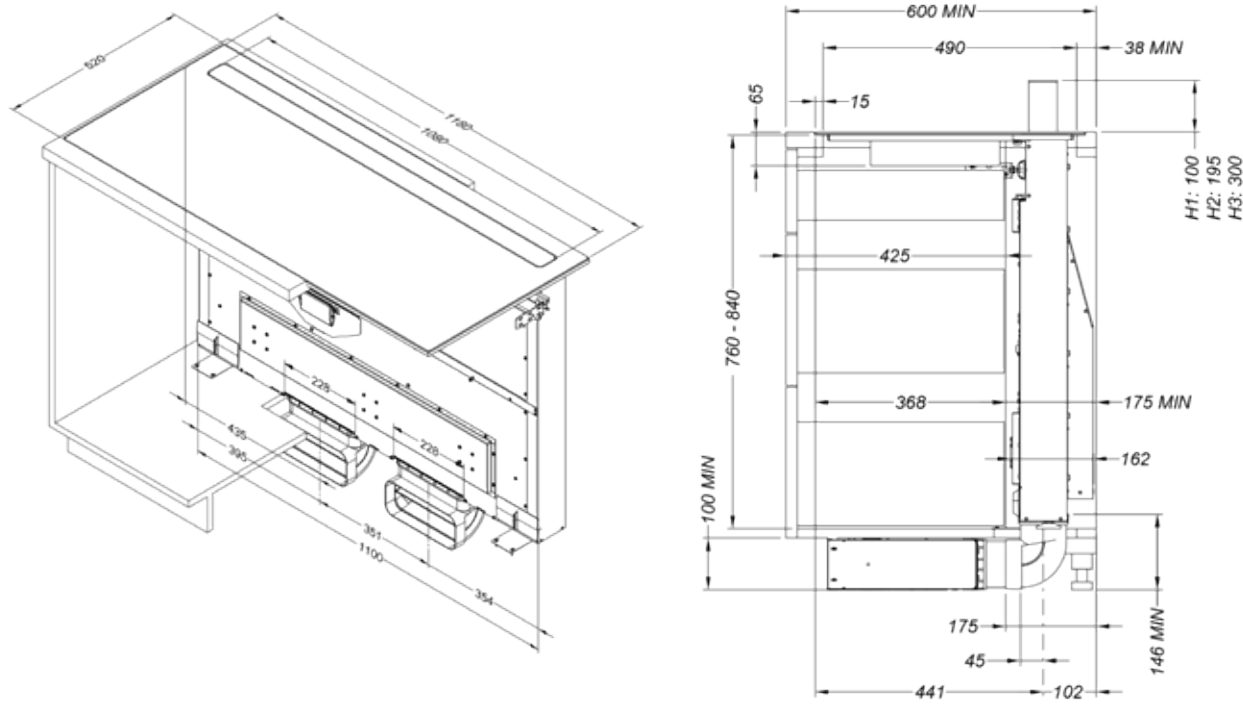

Comment
Built-in lower cabinet from 120 cm without post and with removable back plate.
If the cabinet height is less than 76cm, always order the installation kit for cabinet with article number: 1821.400.

Video
Installation video



Accessories

	Reference	Price/pc	42110	42120	42110-g1
Miscellaneous					
Grease filter left	42120.510	£104	•	•	•
Grease filter right	42120.515	£104	•	•	•
Side profiles kit for hob (Stainless steel)	1700.092	£69	•	•	•
Side profiles kit for hob (Mineral Black)	1700.088	£69	•	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•	•
Lid for roaster (1700.099)	1700.100	£100	•	•	•
Installation kit for cabinet	1821.400	£159	•	•	•
Input / output module	990.036	£204	•	•	•



Accessories

	Reference	Price/pc	42110	42120	42120-g1
Recirculation with exhaust box					
Built-in box (98 mm high) with monoblock filter (1100×290×98 mm)					
White (≈RAL 9003)	7941.400	£699	•	•	•
Mineral Black (≈RAL 9005)	7942.400	£699	•	•	•
Grey (≈RAL 7030)	7943.400	£699	•	•	•
Monoblock replacement filter (set)	98.001	£469	•	•	•
Technical details recirculationboxes see p. 226-227					





Novy Easy 65

- **Compact build:** Perfect for installation in 60cm kitchen cabinets
- **Quiet operation** thanks to optimised airflow
- **Four full cooking zones** with convenient features
- **Easy to maintain**
- **Flexible installation:** Both surface and flush installation possible
- **Pure Comfort recirculation filter** lasts up to 300 cooking hours (1881)
- **Matte Line design (1881-g1):**
 - **Matt black glass** for a contemporary look
 - **Durable finish** with fewer visible signs of use
 - **White controls** for a premium appearance
 - **One reference** for both recirculation and duct out
 - **Monoblock recirculation filter** lasts up to 450 cooking hours (default)



Integrated extraction
Powerful extraction by integrated cooker hood.

Flexzone
Automatic or manual bridge function of two cooking zones.

Recirculation
Recirculation (1881, 1881-g1)

Direct extraction
Direct extraction (1871, 1881-g1)



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc
Venting induction hob with extraction	65×52	4	2× 210×220, 2× Ø175	2× 3000, 2× 2100	7568 *	Glossy black	1871	£2,599
Venting induction hob with recirculation (incl. Pure Comfort filter)	65×52	4	2× 210×220, 2× Ø175	2× 3000, 2× 2100	7568 *	Glossy black	1881	£2,649
Venting induction hob recirculation (incl. Monoblock filter) or with extraction	65×52	4	2× 210×220, 2× Ø175	2× 3000, 2× 2100	7568 *	Matte black	1881-g1	£2,899

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	10	A+	572	41	68

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video
Novy Easy 65



Technical specifications


	Novy Easy 65 1871	Novy Easy 65 1881	Novy Easy 65 Matte Line 1881-g1
Finish			
Colour glass	Glossy black	Glossy black	Matte black
Type of controls	Slider touch control	Slider touch control	Slider touch control
Control Colour	Red	Red	White
Finish	Round border	Round border	Round border
Installation options			
Duct out	•		•
Recirculation		•	• (default setting)
Monoblock recirculation filter		Optional	Default
Pure Comfort recirculation filter		Default	Optional
Pure Finesse recirculation filter		Optional	Optional
Surface / Flush	• / •	• / •	• / •
Induction hob functions			
Number of power levels	9 + Power	9 + Power	9 + Power
Automatic pot detection	•	•	•
Flexzones	• (1 ×)	• (1 ×)	• (1 ×)
Automatic bridge function Flexzone	•	•	•
Manual bridge function Flexzone	•	•	•
Stop & Go	•	•	•
Safety lock hob	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Automatic cooking	•	•	•
Keep-warm function (°C)	70°	70°	70°
Grill function	•	•	•
Cooking zones			
Cooking zone 1	Front left	Front left	Front left
Dimensions (mm) / Power (Boost) W	210×220 / 2100 (3000)	210×220 / 2100 (3000)	210×220 / 2100 (3000)
Cooking zone 2	Rear left	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	210×220 / 2100 (3000)	210×220 / 2100 (3000)	210×220 / 2100 (3000)
Cooking zone 3	Right front	Right front	Right front
Dimensions (mm) / Power (Boost) W	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)
Cooking zone 4	Back right	Back right	Back right
Dimensions (mm) / Power (Boost) W	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)	Ø 175 / 1400 (2100)
			
Cooker hood functions			
Number of speed settings	9 + Power	9 + Power	9 + Power
Automatic speed control	•	•	•
Run-on timer recirculation (min.)		30	30 (default setting)
Run-on timer duct out (min.)	10		10
Cleaning indicator for grease filter	•	•	•
Clearing indicator for recirculation filter		•	•
Collection container for cleaning	2 –fold	2 –fold	2 –fold
Dimensions (mm)			
Dimensions appliance (W×D×H)	650×520×248	650×520×248	650×520×248
Exhaust opening diameter	89×222	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 272-273	See p. 272-273	See p. 272-273
Technical characteristics			
Integrated motor	•	•	•
Weight cooker hood / motor casing (kg)	17,9	18,5	18,5
Electrical connection value (W)	7568, 5918 – 1568	7568, 5918 – 1568	7568, 5918 – 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V	230 V

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1871	Dut out	750	157 / 31	487 / 308	572 / 481	29 / 41	56 / 68	60 / 73
1881	Recirculation	750	143 / -	480 / -	492 / -	34 / 46	53 / 66	54 / 66
1881-g1	Recirculatie mode	750	131 / -	451 / -	460 / -	32 / 44	53 / 65	53 / 66
1881-g1	Duct out mode	750	157 / 31	487 / 308	572 / 481	29 / 41	56 / 68	60 / 73

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

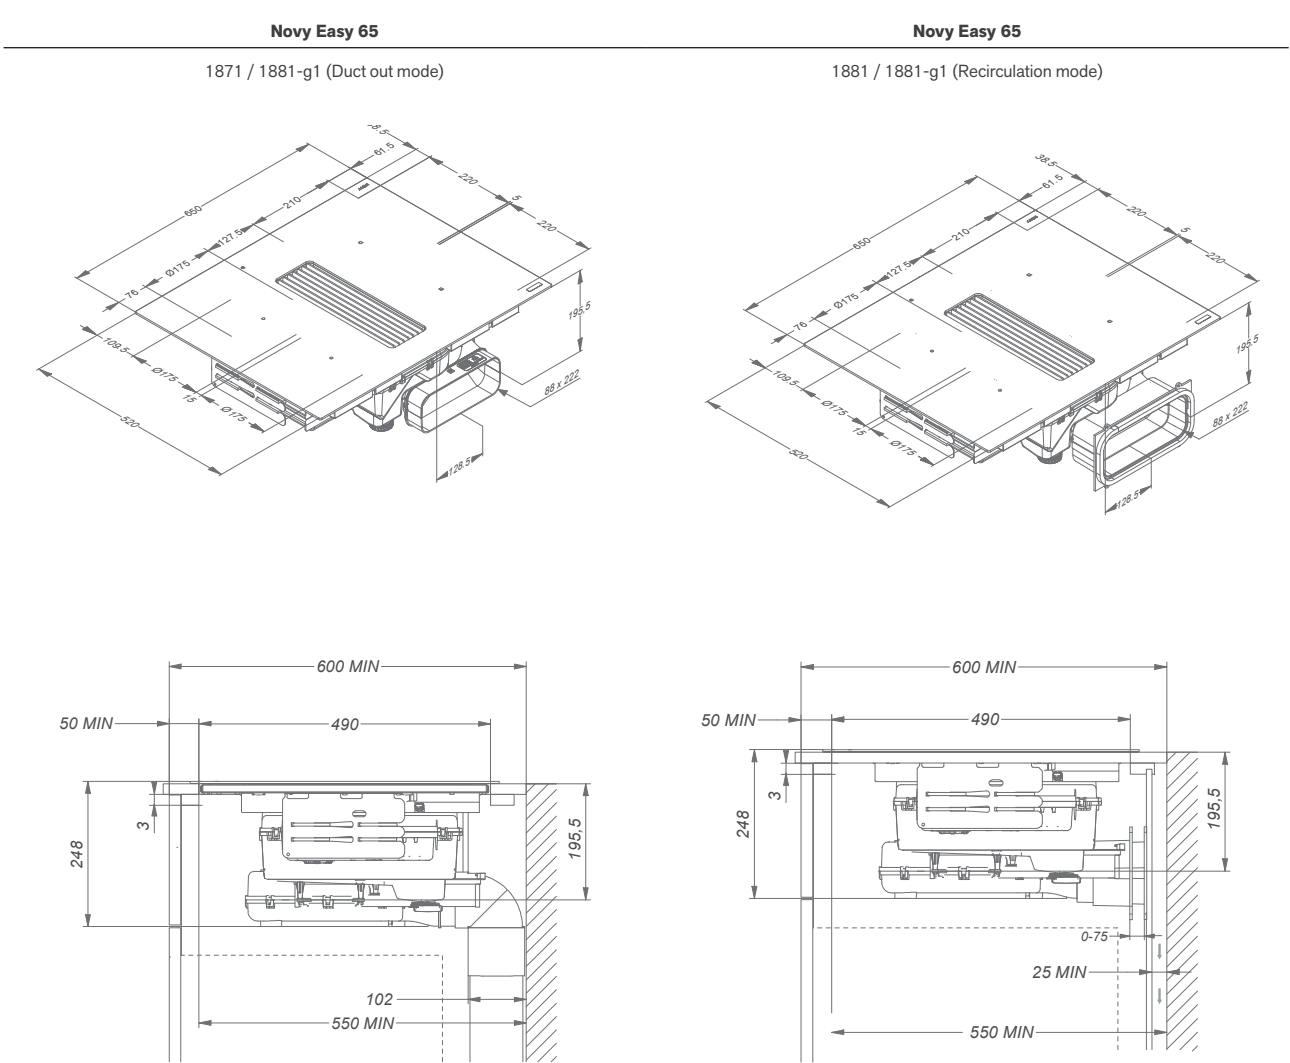

Video
 Installation video



Accessories


	Reference	Price/pc	1871	1881	1881-g1
Miscellaneous					
Grease filter	99.005	£204	•	•	•
Side profiles kit for hob (Stainless steel)	1700.092	£69	•	•	•
Side profiles kit for hob (Mineral Black)	1700.088	£69	•	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•	•
Lid for roaster (1700.099)	1700.100	£100	•	•	•




Accessories

	Reference	Price/pc	1871	1881	1881-g1
Recirculation					
Monoblock (replacement) filter	98.005	£149		•	•
Pure Comfort (replacement) filter	1881.560	£119		•	•
Pure Finesse (replacement) filter	1881.570	£139		•	•
Installation kit with monoblock filter*	1861.820	£169		•	•

* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404

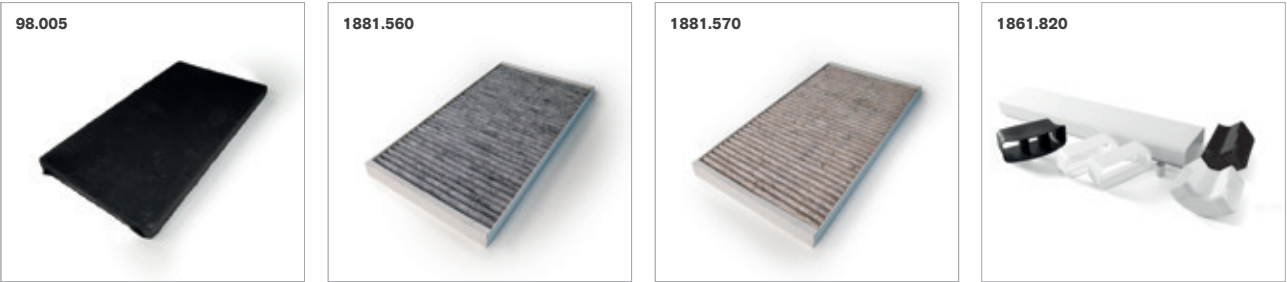

Technical drawing

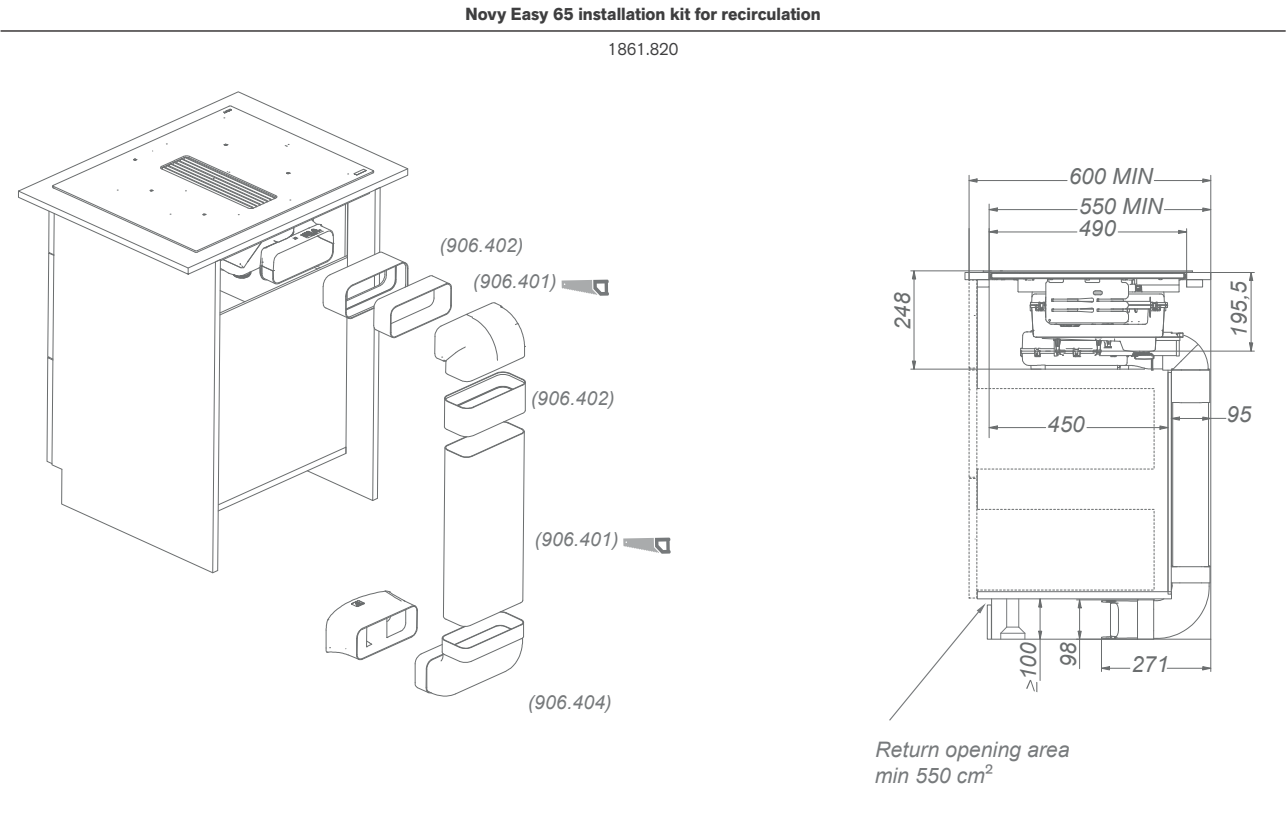



Novy Easy 80

- Large cooking surface
- Quiet operation thanks to optimised airflow
- Four cooking zones with useful functions
- Flexible installation: Suitable for both surface-mounted and flush-mounted installation
- Easy maintenance
- Pure Comfort recirculation filter lasts up to 300 cooking hours (1861)
- Matte Line design(1861-g1):
 - Matt black glass for a contemporary look
 - Durable finish with fewer visible signs of use
 - White controls for a premium appearance
 - One reference for both recirculation and duct out
 - Monoblock recirculation filter lasts up to 450 cooking hours (default)





Integrated extraction
Powerful extraction by integrated cooker hood.



Flexzone
Automatic or manual bridge function of two cooking zones.



Recirculation
Recirculation (1861, 1861-g1)



Direct extraction
Direct extraction (1851, 1861-g1)



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc
Venting induction hob with extraction	80×52	4	 4 × 240×210	4 × 3000	7568 *	Glossy black	1851	£2,699
Venting induction hob with recirculation (incl. Pure Comfort filter)	80×52	4	 4 × 240×210	4 × 3000	7568 *	Glossy black	1861	£2,849
Venting induction hob with recirculation (incl. Monoblock filter) or extraction	80×52	4	 4 × 240×210	4 × 3000	7568 *	Matte black	 1861-g1	£3,429

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEL	Maximum flow rate (m³/h)	Minimum	Maximum
Duct out	Integrated	10	A+++	610	42	66

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video
Novy Easy 80 Matte Line



Technical specifications


	Novy Easy 80 1851	Novy Easy 80 1861	Novy Easy 80 Matte Line 1861-g1
Finish			
Colour glass	Glossy black	Glossy black	Matte black
Type of controls	Slider touch control	Slider touch control	Slider touch control
Control Colour	Red	Red	White
Finish	Round border	Round border	Round border
Installation options			
Duct out	•		•
Recirculation		•	• (default setting)
Monoblock recirculation filter		Optional	Default
Pure Comfort recirculation filter		Default	Optional
Pure Finesse recirculation filter		Optional	Optional
Surface / Flush	• / •	• / •	• / •
Induction hob functions			
Number of power levels	9 + Power	9 + Power	9 + Power
Automatic pot detection	•	•	•
Flexzones	• (2×)	• (2×)	• (2×)
Automatic bridge function Flexzone	•	•	•
Manual bridge function Flexzone	•	•	•
Stop & Go	•	•	•
Safety lock hob	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Automatic cooking	•	•	•
Keep-warm function (°C)	70°	70°	70°
Grill function	•	•	•
Cooking zones			
Cooking zone 1	Front left	Front left	Front left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 2	Rear left	Rear left	Rear left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 3	Right front	Right front	Right front
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)	240×210 / 2100 (3000)
Cooking zone 4	Back right	Back right	Back right
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)	240×210 / 2100 (3000)	240×210 / 2100 (3000)
			
Cooker hood functions			
Number of speed settings	9 + Power	9 + Power	9 + Power
Automatic speed control	•	•	•
Run-on timer recirculation (min.)		30	30 (default setting)
Run-on timer duct out (min.)	10		10
Cleaning indicator for grease filter	•	•	•
Clearing indicator for recirculation filter		•	•
Collection container for cleaning	2 –fold	2 –fold	2 –fold
Dimensions (mm)			
Dimensions appliance (W×D×H)	800×520×215	800×520×215	800×520×215
Exhaust opening diameter	89×222	89×222	89×222
Exhaust position	Rear left / left downwards	Rear left / left downwards	Rear left / left downwards
Opening (B×D)	See p. 272-273	See p. 272-273	See p. 272-273
Technical characteristics			
Integrated motor	•	•	•
Weight cooker hood / motor casing (kg)	18,3	18,9	18,9
Electrical connection value (W)	7568, 5918 – 1568	7568, 5918 – 1568	7568, 5918 – 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V	230 V

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1851	Duct out	750	186/32	520 / 263	610 / 452	30 / 42	54 / 66	58 / 70
1861	Recirculation	750	166 / -	463 / -	512 / -	30 / 43	51 / 64	54 / 66
1861-g1	Recirculatie modus	750	172 / -	472 / -	537 / -	32 / 44	53 / 65	55 / 67
1861-g1	Modus afvoer naar buiten	750	186/32	520 / 263	610 / 452	30 / 42	54 / 66	58 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

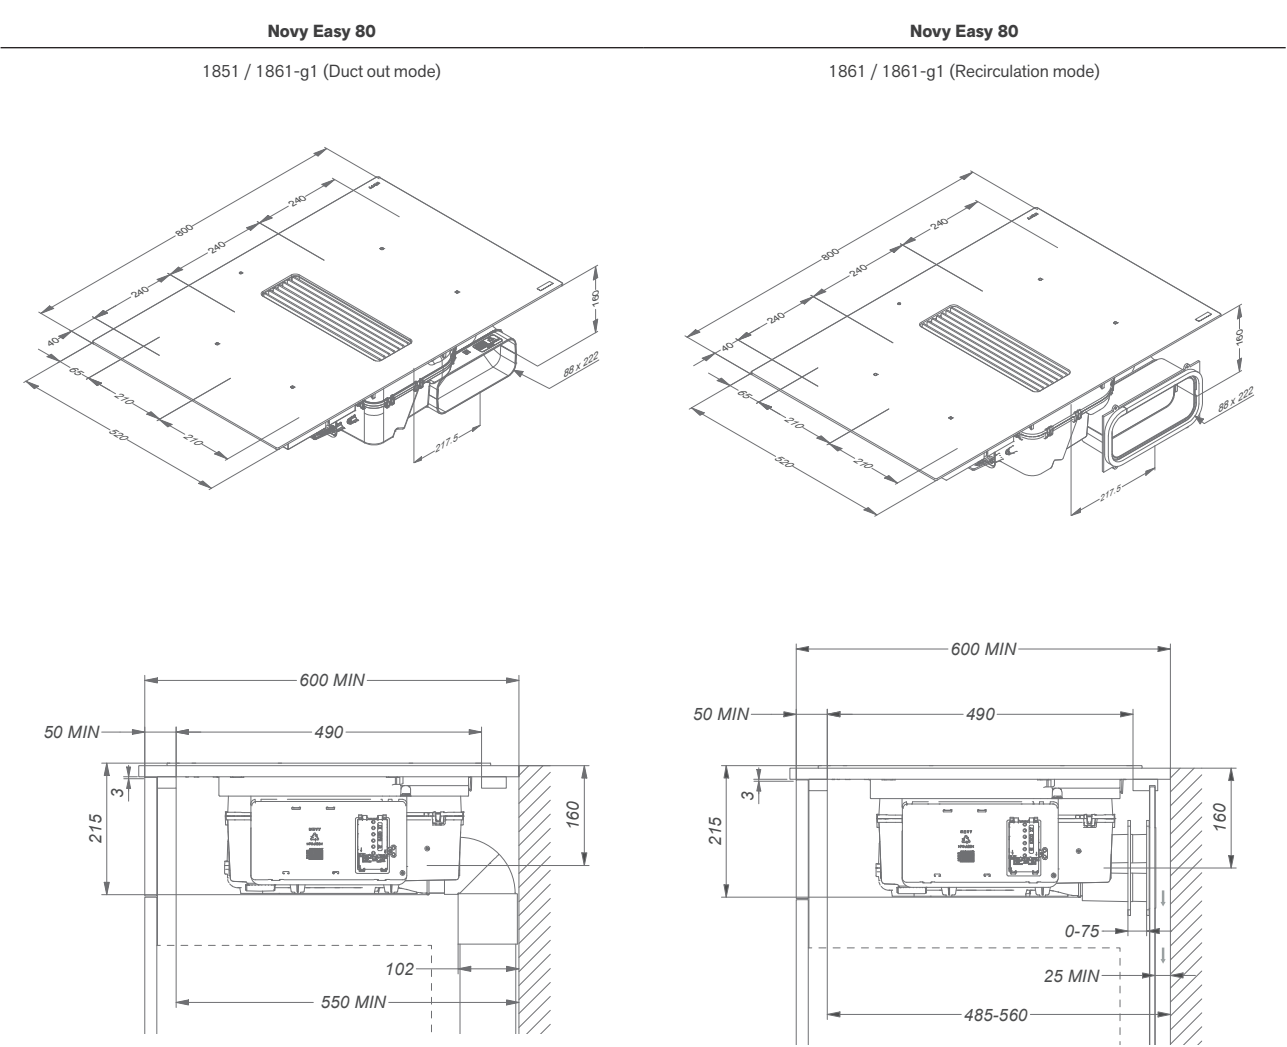

Video
Installation video



Accessories


	Reference	Price/pc	1851	1861	1861-g1
Miscellaneous					
Grease filter	99.003	£204	•	•	•
Side profiles kit for hob (Stainless steel)	1700.092	£69	•	•	•
Side profiles kit for hob (Mineral Black)	1700.088	£69	•	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•	•
Lid for roaster (1700.099)	1700.100	£100	•	•	•




Accessories

	Reference	Price/pc	1851	1861	1861-g1
Recirculation					
Monoblock (replacement) filter	98.002	£149		•	•
Pure Comfort (replacement) filter	1861.560	£119		•	•
Pure Finesse (replacement) filter	1861.570	£139		•	•
Installation kit with monoblock filter*	1861.820	£169		•	•

* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404

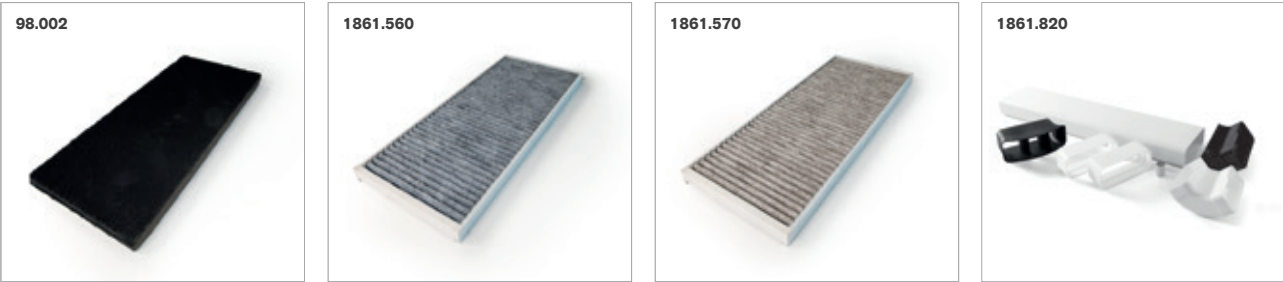

Technical drawing

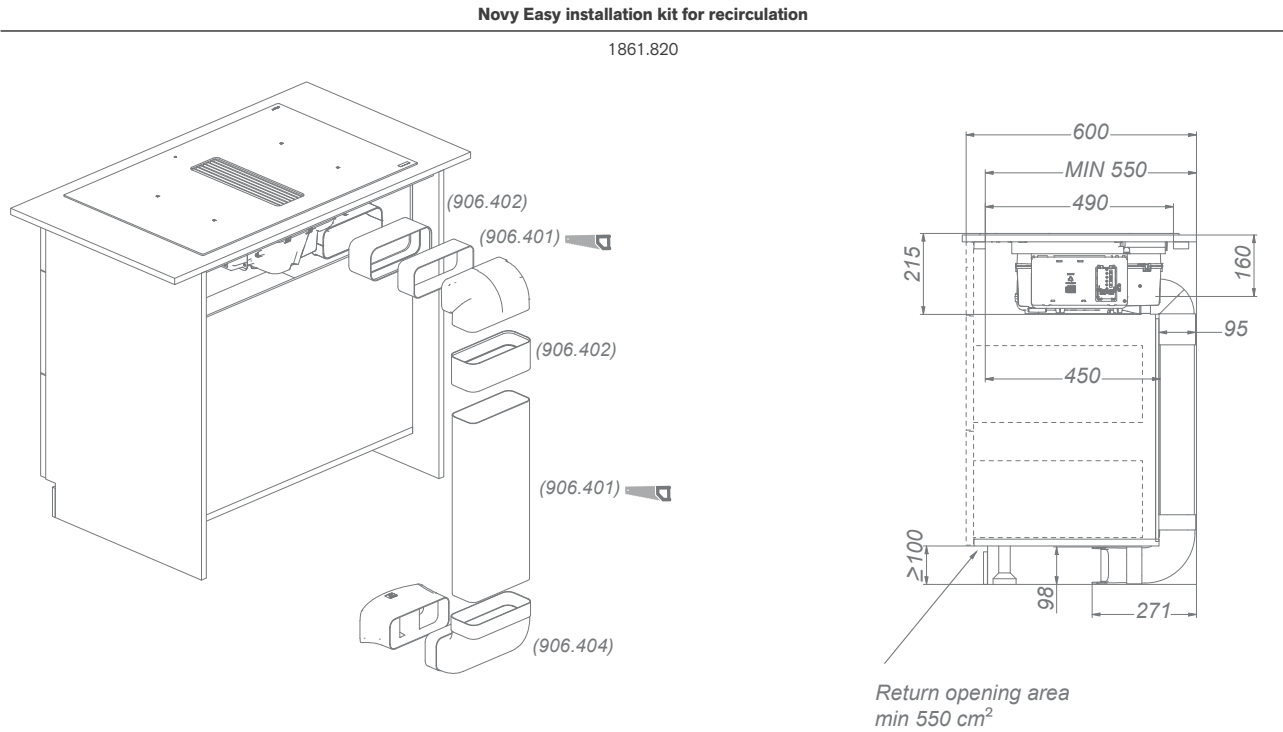





NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Easy 90 Prestige

- **Elegant operation** with black powder-coated aluminium control dials
- **One reference** for both recirculation and duct out
- **Extra large cooking surface**
- **Quiet operation** thanks to optimised airflow
- **Four cooking zones** with useful features
- **Flexible installation:** Suitable for both surface-mounted and flush-mounted installation
- **Easy maintenance**
- **Monoblock recirculation filter** lasts up to 450 cooking hours (default)

Novy Easy 90 Prestige / Venting hobs



68 – 69



Integrated extraction
Powerful extraction by integrated cooker hood.



Flexzone
Coupling of two cooking zones for large pots and pans.



Recirculation
Recirculation as standard.



Direct extraction
Adjustable.



	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc	
Venting induction hob with extraction	90×52	4		4× 240×210	4× 3000	7568 *	Glossy black	1866	£4.799

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Recirculation mode (default)	Integrated	10	-	537	44	65
Duct out mode	Integrated	10	A+++	610	47	66

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

* Standard power setting but can be adjusted if required, see technical characteristics next page.

Video
Novy Easy 90 Prestige



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOBS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOBS



GAS HOBS



DESIGNER
LIGHTING



INFO

Technical specifications


Novy Easy 90 Prestige 1866	
Finish	
Colour glass	Glossy black
Type of controls	Rotary control knob
Colour and material knobs	Black powder-coated aluminium
Control Colour	Red
Finish	Round border
Installation options	
Duct out	•
Recirculation	• (default setting)
Monoblock recirculation filter	Default
Surface / Flush	• / •
Induction hob functions	
Number of power levels	9 + Power
Automatic pot detection	•
Flexzones	• (2×)
Manual bridge function Flexzone	•
Safety lock hob	•
Automatic cooking	•
Keep-warm function (°C)	42°
Cooking zones	
Cooking zone 1	Front left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 2	Rear left
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 3	Right front
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
Cooking zone 4	Back right
Dimensions (mm) / Power (Boost) W	240×210 / 2100 (3000)
	
Cooker hood functions	
Number of speed settings	9 + Power
Automatic speed control	•
Run-on timer recirculation mode (min.)	30 (default setting)
Run-on timer duct out mode (min.)	10
Cleaning indicator for grease filter	•
Clearing indicator for recirculation filter	•
Collection container for cleaning	2 –fold
Dimensions (mm)	
Dimensions appliance (W×D×H)	900×520×215
Exhaust opening diameter	89×222
Exhaust position	Rear left / left downwards
Opening (B×D)	See p. 272-273
Technical characteristics	
Integrated motor	•
Weight cooker hood / motor casing (kg)	24,3
Electrical connection value (W)	7568, 5918 - 1568
Multiphase supply voltage	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)		
			Minimum	Continuous	Power mode	Minimum	Continuous	Power mode
1866	Recirculation mode (default)	750	172 / -	472 / -	537 / -	32 / 44	53 / 65	55 / 67
1866	Duct out mode	750	220 / 46	520 / 263	610 / 452	34 / 47	54 / 66	58 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawing

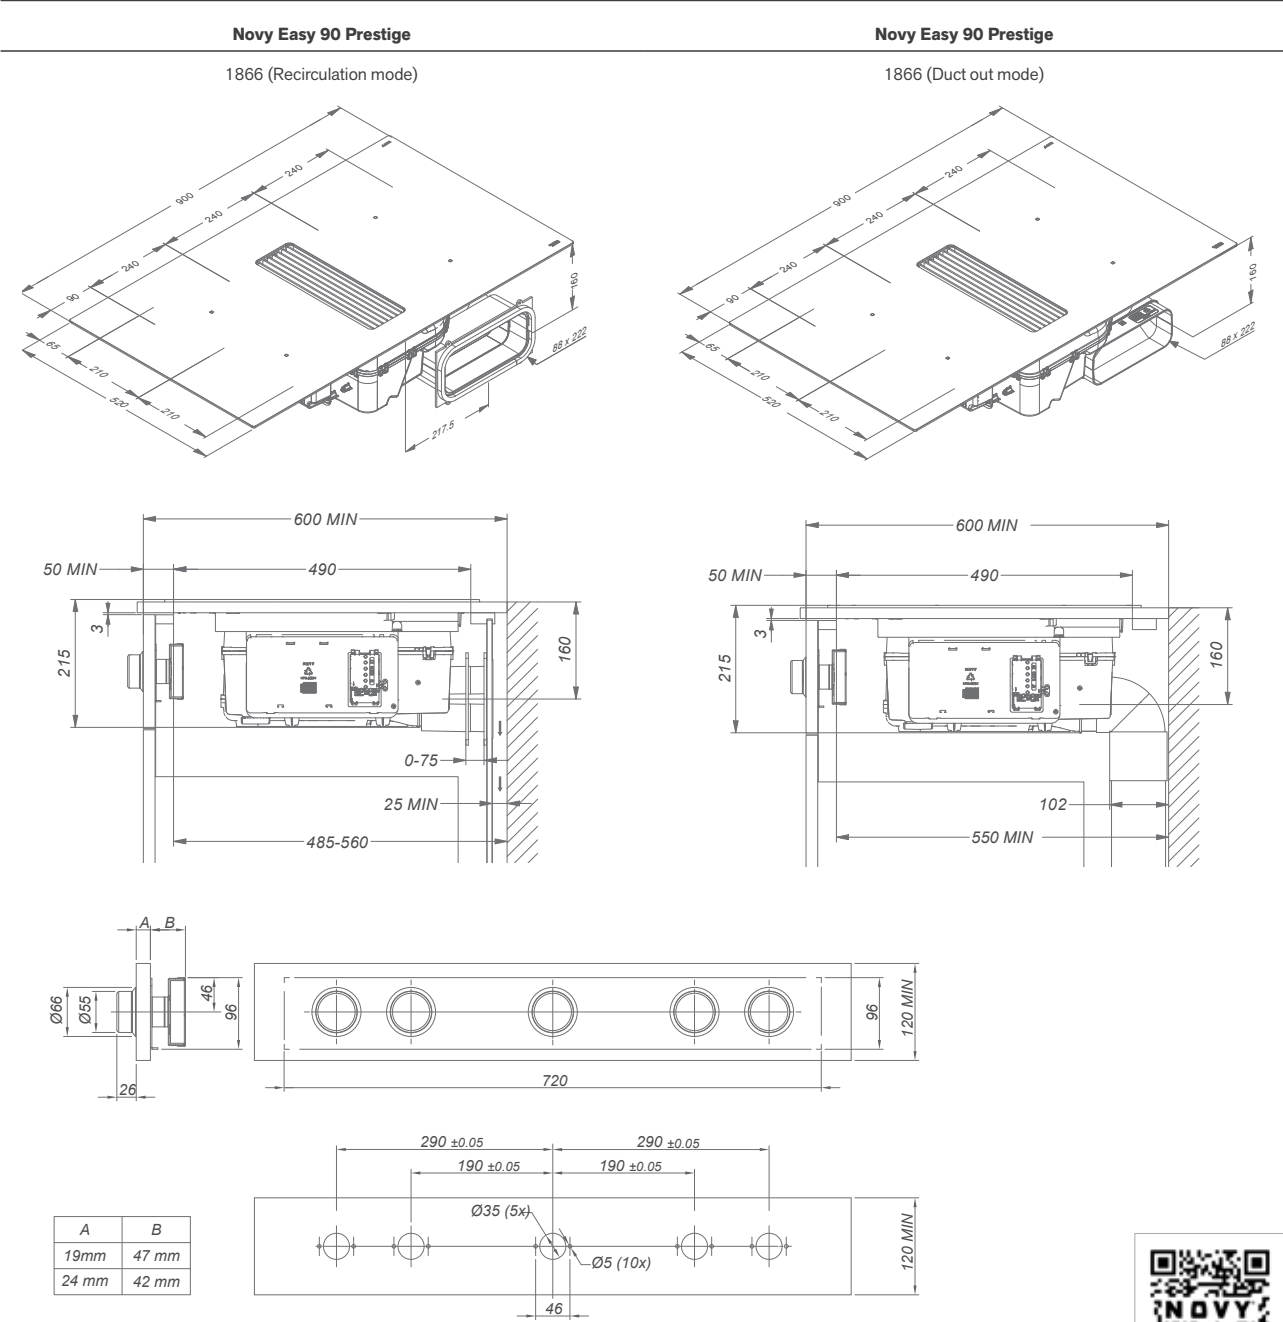

* The front panel of the cabinet must be removable to mount the rotary controls.
** This kit with rotary controls is only suitable for use with a 19 or 24 mm thick removable front panel.

Video
Installation video




Accessories

	Reference	Price/pc	1866
Miscellaneous			
Grease filter	99.003	£204	•
Side profiles kit for hob (Stainless steel)	1700.092	£69	•
Side profiles kit for hob (Mineral Black)	1700.088	£69	•
Grill plate (240×415 mm)	1700.093	£309	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•
Lid for roaster (1700.099)	1700.100	£100	•




Accessories

	Reference	Price/pc	1866
Recirculation			
Monoblock replacement filter	98.002	£149	•
Installation kit with monoblock filter*	1861.820	£169	•
* Discharge adapter plinth incl. Ref 906.401 + 2x906.402 + 906.404			

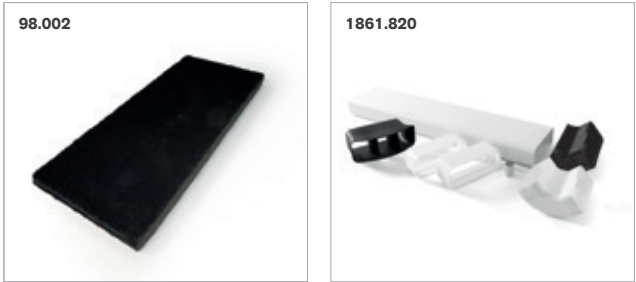

Technical drawing

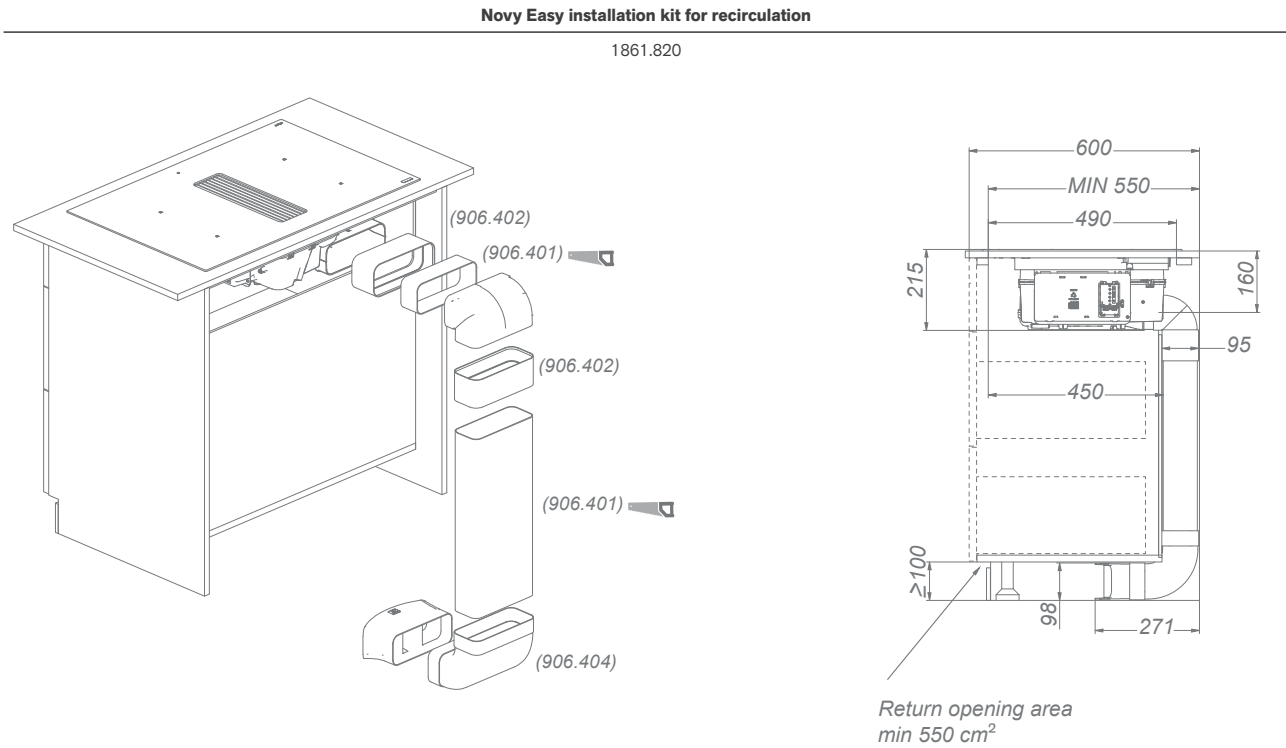





Novy Up

- **Extra large cooking area** thanks to 38 cm domino hobs
- **Efficient extraction** at pot level
- **Invisible extractor tower** disappears completely after use
- **Adjustable flap** with manually settable extraction height
- **Freedom of choice:** Multiple cooking setups possible
- **Flexible installation:** Surface and flush installation possible
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours





Tower exhaust system
Optimal extraction at the height of the pots.



Flexzone
Manual bridge function of two cooking zones. (except 40002)



Recirculation
Recirculation is optional.



Direct extraction
Default setting.



5 YEARS WARRANTY



P

	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Cooking zones output (W)	Max. output (W)	Colour	Ref.	Price/pc	
Venting induction hob Power	49×52	2		2 × 240×200	3000 + 1850	3700	Glossy black	40000	£2,769
Venting induction hob Comfort	87×52	4		2 × ø175, 2 × ø210	2x 3000 + 2x 1400	7400	Glossy black	40002	£3,609
Venting induction hob Power	87×52	4		4 × 240×200	2x 3000 + 2x 1850	7400	Glossy black	40004	£3,844
Venting induction hob Power + Teppan	87×52	4		2 × 240×200	3000 + 1850 + 2800	6500	Glossy black	40006	£5,534
Venting induction hob Power + Wok	87×52	3		2 × 240×200	3000 + 1850 + 3200	6900	Glossy black	40008	£5,419

Sound level during normal use in dB(A) (re 1 pW)						
	Motor	Width (cm)	EEl	Maximum flow rate (m³/h)	Minimum	Maximum
Extraction	Integrated	11	B	537	55	62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Up



Technical specifications

	Novy Up 40000	Novy Up 40002
Controls		
Colour glass	Glossy black	Glossy black
Type of controls	Touch control	Touch control
Control colour	Red	Red
Finish	Round border	Round border
Installation options		
Extraction	•	•
Recirculation	• (default setting)	• (default setting)
Recirculation options	Exhaust box (See p. 82)	Exhaust box (See p. 82)
Surface / flush	• / •	• / •
Induction hob functions		
Number of power levels	9 + Power	9 + Power
Flexzones	• (1 ×)	
Manual bridge function Flexzone	•	
Stop & Go		
Safety lock hob	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function		
Cooking zones		
Number of cooking zones	2	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 1600 (1850)	175 / 1100 (1400)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (BOOST) (W)	240×200 / 2100 (3000)	210 / 2300 (3000)
Cooking zone 3		Front right
Dimensions (mm) / Power (BOOST) (W)		175 / 1100 (1400)
Cooking zone 4		Rear right
Dimensions (mm) / Power (BOOST) (W)		210 / 2300 (3000)
		
Cooker hood functions		
Number of speed settings	3 + power	3 + power
Run-on timer (min)	10-30 (default setting)	10-30 (default setting)
Clearing indicator for grease filter	•	•
Clearing indicator for recirculation filter	•	•
Venting valve for aspiration direction	•	•
Extraction height tower (cm)	0 / 10	0 / 10
Collection container for cleaning	Fixed	Fixed
Tower operation	Manual	Manual
Dimensions (mm)		
Dimensions appliance (WxDxH)(mm)	491×520×228	872×520×228
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Rear left /left downwards	Rear left / left downwards
Opening (WxD)	See p. 272-273	See p. 272-273
Maximum thickness worktop (mm)	25	
Technical characteristics		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	24	29
Electrical connection value cooker hood (W)	155	155
Electrical connection value induction hob (W)	3700	7400
Supply voltage	2 power supplies	3 power supplies
Cooker hood	230 V	230 V
Induction hob	230 V - 1N	230 V - 1N / 2N



Novy Up 40004	Novy Up 40006	Novy Up 40008
Glossy black	Glossy black	Glossy black
Touch control	Touch control + slider	Touch control + slider
Red	Red	Red
Round border	Round border	Round border
•	•	•
• (default setting)	• (default setting)	• (default setting)
Exhaust box (See p. 82)	Exhaust box (See p. 82)	Exhaust box (See p. 82)
• / •	• / •	• / •
9 + Power	9 + Power	9 + Power
• (2×)	• (1 ×)	• (1 ×)
•	•	•
•	• (teppan)	• (wok)
•	• (teppan)	• (wok)
•	•	•
•	•	•
	• (teppan)	• (wok)
4	4	3
Front left	Front left	Front left
240×200 / 1600 (1850)	240×200 / 1600 (1850)	240×200 / 1600 (1850)
Rear left	Rear left	Rear left
240×200 / 2100 (3000)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Front right	Front right	Front right
240×200 / 1600 (1850)	1400	360 / 2000 (3200)
Rear right	Rear right	
240×200 / 2100 (3000)	1400	
		
3 + power	3 + power	3 + power
10-30 (default setting)	10-30 (default setting)	10-30 (default setting)
•	•	•
•	•	•
•	•	•
0 / 10	0 / 10	0 / 10
Fixed	Fixed	Fixed
Manual	Manual	Manual
872×520×228	872×520×228	872×520×228
89×222	89×222	89×222
Rear left / left downwards	Rear left / left downwards	Rear left / left downwards
See p. 272-273	See p. 272-273	See p. 272-273
•	•	•
30	33,6	33,6
155	155	155
7400	6500	6900
3 power supplies	3 power supplies	3 power supplies
230 V	230 V	230 V
230 V - 1N / 2N	230 V - 1N / 2N	230 V - 1N / 2N

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)			Noise level dB(A)		
			Minimum	Continuous	Power setting	Minimum	Continuous	Power setting
40000	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40002	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40004	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40006	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64
40008	Integrated motor	750	375 / 188	502 / 325	537 / 501	43 / 55	51 / 62	52 / 64

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.


Technical drawing

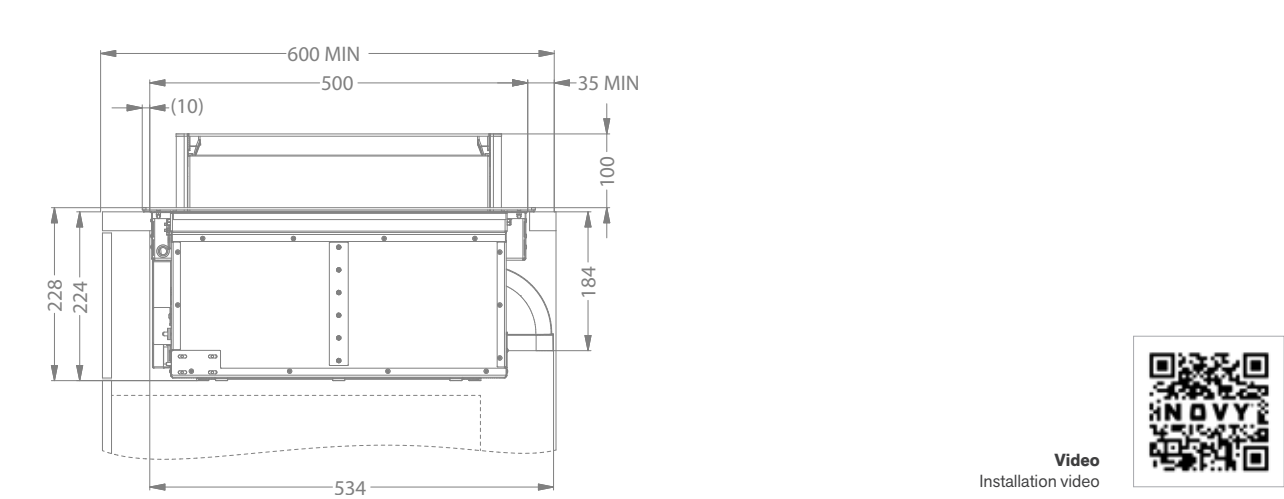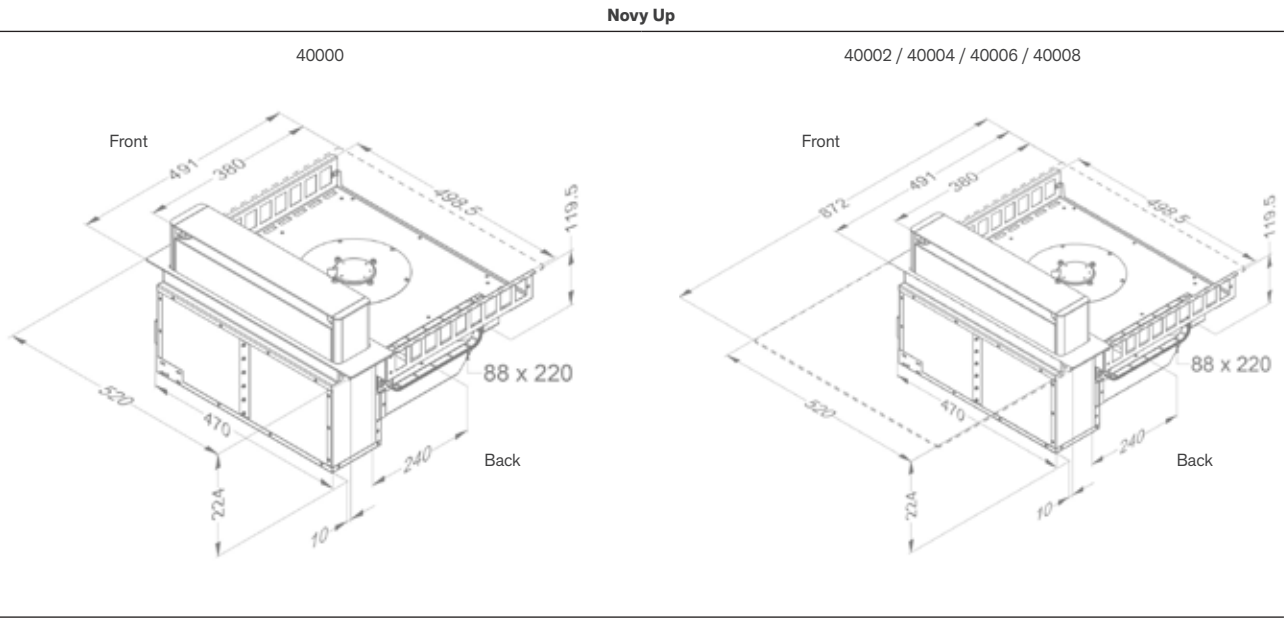

Video
Installation video



Installation options

	Type	Cooking zone	Total width (mm)
	40000	2	491
	40002 to 40008	4	872
	40000 + 40002 to 40008	6	1364
	40002 to 40008 + 40002 to 40008	8	1745

* Wok or Teppan Yaki should always be positionned to the right.



Accessories

	Reference	Price/pc	40000-8
Miscellaneous			
Grease filter	99.002	£124	•
Cabelset windowsswitch	990.037	£79	•
Recirculation with exhaust box			
Built-in box (98 mm high) with monoblock filter (818×289×98 mm)			
White (≈RAL 9003)	7921.400	£459	•
Mineral Black (≈RAL 9005)	7922.400	£459	•
Grey (≈RAL 7030)	7923.400	£459	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•
Installation kit with monoblock filter* (818×289×98 mm) (at a minimum cabinet depth of 60 cm)			•
White (≈RAL 9003)	1811.821	£549	•
Mineral Black (≈RAL 9005)	1811.822	£549	•
Grey (≈RAL 7030)	1811.823	£549	•
Monoblock replacement filter (2 pcs to order)	7910.055	£159	•

* Installation kit contains built-in box with monoblock filter (818×289×98 mm) incl. references 906.401, 906.402 (2x) & 906.404

Technical details recirculationboxes see p. 226-227





Ceiling units


Novy Cloud



Novy Pureline Pro Compact



Novy Pureline Compact

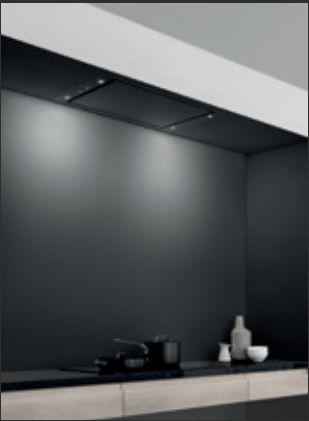

Novy Pureline Pro



Novy Pureline (with lighting)



Novy Pureline (without lighting)



Novy Maxi Pureline



Width

90 cm		■	■	■	■	■	
110 cm	■						
120 cm		■	■	■	■	■	
150 cm							■

Colour

White	■	■	■	■	■	■	■
Stainless steel		■	■	■	■	■	■
Mineral Black	■	■	■	■	■	■	

Motor

Integrated	■	■	■	■	■	■	
From a distance (inside)				Optional	Optional	Optional	
Not included					■	■	■

Exhaust

To the outside		■	■	■	■	■	■
Recirculation	■	Optional	Optional	Optional	Optional	Optional	Optional

p. 90

p. 96

p. 102

p. 108

p. 114

p. 120

p. 126

Step-by-step plan

The following 5-step plan helps you find your way in choosing the right Novy ceiling unit.

Step 1 Width of the ceiling unit

For a good result the cooker hood must be at least the full width of the hob. Our ceiling units are available in sizes 90, 110, 120 and 150 cm. The following combinations are recommended for the ceiling units (directive):

Width hob	Width ceiling unit	Max. distance between cooker hood and hob
≤ 80 cm ¹	min. 90 cm	160 cm
81 - 109 cm	min. 110 cm	160 cm
110 - 120 cm	min. 120 cm	160 cm
> 120 cm	min. 150 cm	160 cm

¹ For installation in fully suspended ceilings, we recommend a ceiling unit of at least 120 cm for hobs 80 and 90 cm wide.

Step 2 LED lighting

With LED lights

The ceiling unit is equipped with dual LED lighting or a LED strip. The light intensity and colour temperature can be adjusted to your wishes.

Without LED lights

For a minimalistic design. To these ceiling units you can connect external lighting (max. 300 W), which can be operated through the cooker hood, remote control or InTouch technology (not dimmable).

Step 3 Recirculation or exhaust to the outside

Recirculation

If extraction to the outside is not an option, you can choose recirculation instead. For ceiling units it is possible to choose

- 2 types of built-in boxes, each in 3 colours with monoblock filter.
- A basic kit. The basic kit contains a monoblock filter. The monoblock filter is placed directly behind the grease filter. The exhaust grill to let the filtered air back into the kitchen must be provided by you.

The Novy Cloud has recirculation as a standard.

With a cooker hood with recirculation, there must be a minimum of ventilation in the room where the cooker hood has been installed. Ventilation can be provided by the overall ventilation in the house or by opening a window and/or door.

Duct out

Novy offers a wide range of installation accessories on p. 232. A cooker hood works optimally when the extracted air is replaced with fresh air. An insufficient air inlet leads to a loss of efficiency. It is therefore best to provide a sufficient air inlet (via a window extractor, an open door or window, or from another room).

Step 4 Ceiling unit installation options

The Novy Pureline ceiling unit can be installed in 2 ways:

- flush-mounted in the ceiling
- in an alcove or a self-constructed chimney


The Novy Cloud ceiling unit can be mounted directly to the ceiling.

The maximum installation height (between the hob and the underside of the ceiling unit) is 160 cm.

Installation in an alcove or self-constructed chimney




Cooking vapours do not rise straight up, instead they fan out over an angle of between 10° and 15°. For an efficient operation it is important that the whole construction in which the ceiling unit is installed is at least the same width and depth as the hob. Create an overlap of approximately 30 cm around the ceiling unit to prevent cooking vapours from escaping. In addition, edging of 5 to 10 cm high will ensure that fewer vapours can escape.

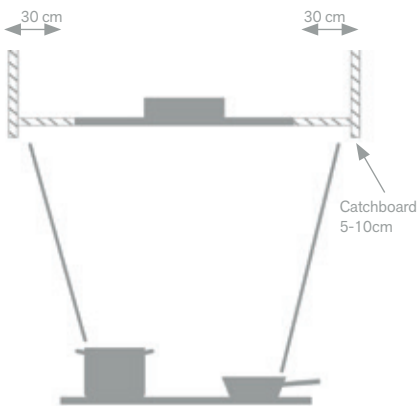

Installation in the ceiling



In this type of installation the ceiling unit is installed in a suspended ceiling and usually covers the entire kitchen. Because the unit is flush with the ceiling, vapours cannot rise higher than the unit itself and are captured along the edges.

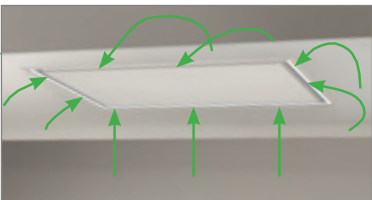


Mounting onto the ceiling



The Novy Cloud ceiling unit only needs to be screwed to the ceiling and does not require any opening in the ceiling. Never before has it been this easy to install a cooker hood. Make sure, however, that your ceiling is sufficiently strong.

Construction of the suspension structure

On the long sides of the Novy Pureline ceiling unit there are mounting clamps that hold the cooker hood in the cut-out opening. For this, the material and thickness must be 18-35 mm. Never mount directly in the plasterboard, always provide reinforcement (in wood, on the side or by means of a frame) to which the mounting clamps can be clamped.

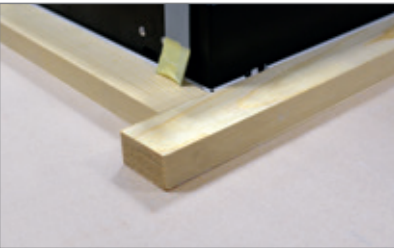

Adapter for flat duct with limited built-in height

If the built-in depth is limited, it is possible to remove the Cubic motor from the ceiling unit. In this situation, an optional adapter can be ordered. The adaptor is placed directly on the ceiling unit and connected to a flat rectangular duct. The motor is then installed in a different location indoors. Please note that the entrance to the motor is round. With adapter 6830.053 the built-in height can be limited to 17,3 cm and with 830.053 to 18,5 cm. Always mount the adapter 6830.053 and 6930.050 in combination with the kit to install remote motor inside (800.991) and connector 906.402.

6830.053	Adaptor for Novy Pureline. exhaust direction can be turned to the right, left, front or rear	£159
6930.050	Adaptor for Novy Pureline Pro. exhaust direction can be turned to the right, left, front or rear	£264
830.053	Adaptor for Novy Maxi Pureline (order 2x). Exhaust direction 1x left and 1x right	£159
800.991	Kit to install the remote motor inside (Novy Pureline Pro & Pureline)	£159
906.402	Connector	£24



Step 5

Type of motor

Cloud ceiling unit recirculation as standard

This ceiling unit is equipped with recirculation as standard and needs only to be screwed to the ceiling. It is not necessary create an opening in the ceiling.

Ceiling unit motor not included






Models without a motor are combined with an interior motor, wall-mounted motor or flat roof motor

Ceiling unit with compact motor

The ceiling unit, including the compact motor, has a built-in height of only 19.5 cm. The exhaust can be turned to the right, left, front or rear. This motor cannot be removed.

Ceiling unit with a Cubic motor

The integrated Cubic motor offers the necessary flexibility, because the exhaust can be rotated in all directions (right, left, front, rear or above). With an optional kit (800.991), the Cubic motor can also be removed and placed elsewhere in the house. A 5 m cable (included) connects the ceiling unit with the motor. If required, this cable can also be extended (optional). This extension cable is connected to the existing cable and has a length of 5 m.

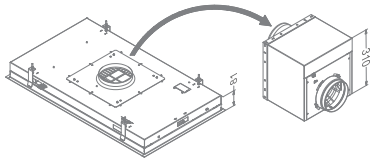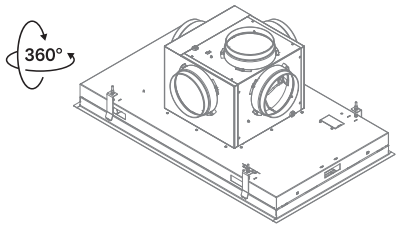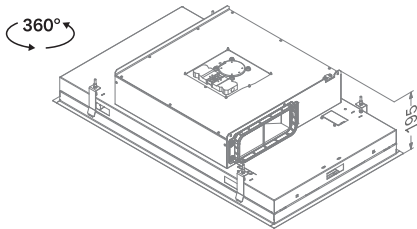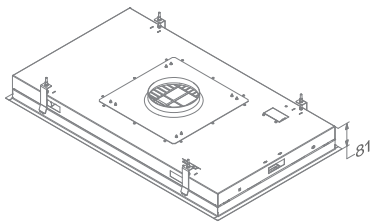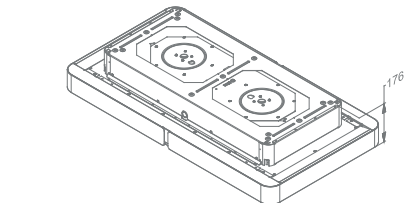

Overview of ceiling units

Step 2

Step 1

		With light		Without light	
Novy Pureline 90 cm	Stainless steel	Compact motor, with LED strip	6910		
	Stainless steel	Compact motor, with LED spots	6810		
	Stainless steel	Cubic motor ,with LED strip	6930		
	Stainless steel	Cubic motor, with LED spots	6830	Cubic motor	6833
	Stainless steel	Motor not included, with LED spots	6835	Motor not included	6838
	White	Compact motor, with LED strip	6911		
	White	Compact motor, with LED spots	6811		
	White	Cubic motor, with LED strip	6931		
	White	Cubic motor, with LED spots	6831	Cubic motor	6834
	White	Motor not included, with LED spots	6836	Motor not included	6839
	Mineral Black	Compact motor with LED strip	6912		
	Mineral Black	Compact motor, with LED spots	6812		
	Mineral Black	Cubic motor with LED strip	6932		
Novy Pureline 120 cm	Stainless steel	Compact motor, with LED strip	6920		
	Stainless steel	Compact motor, with LED spots	6820		
	Stainless steel	Cubic motor, with LED strip	6940		
	Stainless steel	Cubic motor, with LED spots	6840	Cubic motor	6843
	Stainless steel	Motor not included, with LED spots	6845	Motor not included	6848
	White	Compact motor, with LED strip	6921		
	White	Compact motor, with LED spots	6821		
	White	Cubic motor, with LED strip	6941		
	White	Cubic motor, with LED spots	6841	Cubic motor	6844
	White	Motor not included, with LED spots	6846	Motor not included	6849
	Mineral Black	Compact motor, with LED strip	6922		
	Mineral Black	Compact motor, with LED spots	6822		
	Mineral Black	Cubic motor, with LED strip	6942		
Novy Maxi Pureline 150 cm	Stainless steel			Motor not included	855
	White			Motor not included	856
Novy Cloud 110 cm	White	Motor, recirculation	230		
	Mineral Black	Motor, recirculation	232		



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Cloud

- **Fine lines** for clean and sleek design
- **Easy installation:** Screws directly to ceiling
- **Adjustable lighting** from 2,700K to 5,000K
- **Low installation height** of only 17.6 cm
- **Extended lighting function** with cooking and ambient mode
- **Smart operation** via Novy Connect App, InTouch or remote control
- **Flexible placement** thanks to integrated recirculation
- **Recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Standard with recirculation.



Novy Connect
Operation and settings possible via smartphone or tablet.



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
110	Integrated	White	504	49	68	230	£3,014
	Integrated	Mineral Black	504	49	68	232	£3,014

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Cloud



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOBS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOBS



GAS HOBS



DESIGNER
LIGHTING



INFO

Technical specifications

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
230	Integrated motor	1010	187	272	343	504	37 / 49	42 / 54	48 / 60	56 / 68
232										

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

≥50

Front

≥100

If air guide is used

176

80

402

883

1100

109

99

600

R50

R31

NOVY

Video
Installation video

The minimum distance from the left and/or right side of the Cloud to a wall or window may not be less than 50 cm.

Use the supplied air guide if the distance between the left and/or right side of the cooker hood and a wall or window is 50 to 100 cm. At the front of the cooker hood, where the air is blown out, the distance to the wall must then be at least 100 cm.

Accessories

	Reference	Price/pc	230	232
Miscellaneous				
Monoblock replacement filters (set per 4)	230.060	£404	•	•
Grease filter (replacement) (2 pcs to order)	230.020	£159	•	•
Remote control (white)	840.029	£104	•	•
Mounting frame Mineral Black	230.520	£124	•	
Mounting frame white	230.510	£124		•

230+230.500

230.060

230.020

230.520

840.029

ABOUT NOVY

COOKER HOOD GUIDELINES

VENTING HOBS

CEILING UNITS

BUILT-IN COOKER HOODS

TELESCOPIC COOKER HOODS

WALL-MOUNTED COOKER HOODS

ISLAND COOKER HOODS

COOKER HOOD ACCESSORIES

INDUCTION HOBS

GAS HOBS

DESIGNER LIGHTING

INFO





NOVY

PREMIUM
INNOVATION
PRODUCT


Novy Pureline Pro Compact

- **Maximum efficiency** with ultra-quiet operation
- **Adjustable lighting** from 2,700K to 5,000K
- **Extended LED function:** Cooking and ambient modes
- **Low built-in height** of only 19.5 cm with compact motor
- **Flexible motor:** Rotatable in multiple directions
- **Easy operation:** Via remote control, InTouch or Novy Connect App
- **Automatic speed control** with optional Novy Sense sensor
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours

Novy Pureline Pro Compact / Ceiling Units



96 – 97

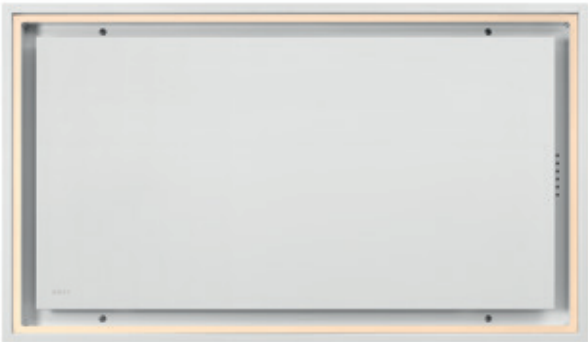

Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Novy Connect
Operation and settings possible via smartphone or tablet.



In option



					Sound level during normal use in dB(A) (re 1 pW)			
Width (cm)	Motor	Colour	EEl	Flow power function (m³/h)	Minimum	Maximum	Ref.	Price/pc
90	Integrated, compact motor	Stainless steel	B	618	41	62	6910	£2,409
	Integrated, compact motor	White	B	618	41	62	6911	£2,409
	Integrated, compact motor	Mineral Black	B	618	41	62	6912	£2,409
120	Integrated, compact motor	Stainless steel	B	619	41	62	6920	£2,639
	Integrated, compact motor	White	B	619	41	62	6921	£2,639
	Integrated, compact motor	Mineral Black	B	619	41	62	6922	£2,639

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Pureline Pro Compact



ABOUT
NOVY

COOKER
HOOD
GUIDELINES

VENTING
HOBS

CEILING
UNITS

BUILT-IN
COOKER
HOODS

TELESCOPIC
COOKER
HOODS

WALL-
MOUNTED
COOKER
HOODS

ISLAND
COOKER
HOODS

COOKER
HOOD
ACCESSORIES

INDUCTION
HOBS

GAS HOBS

DESIGNER
LIGHTING

INFO

Technical specifications



Functions		
Controls	Remote control (black) + Novy Connect	Remote control (black) + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Sense sensor	Optional (6910.070)	Optional (6910.070)
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting		
Type of lighting (W)	LED (20) / dimmable	LED (21) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics		
Colour	6910 stainless steel 6911 white (≈RAL 9003) 6912 Mineral Black (≈RAL 9005)	6920 stainless steel 6921 white (≈RAL 9003) 6922 Mineral Black (≈RAL 9005)
Integrated motor	▪ (not removable)	▪ (not removable)
Weight cooker hood (kg)	29	32
Mains voltage (V) / Electrical connection value (W)	230 / 210	230 / 210


Dimensions		
Dimensions (W×D×H) (mm)	868×508×195	1168×508×195
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6910, 6911, 6912	Integrated motor	750	257 / 52	474 / 192	550 / 272	618 / 478	29 / 41	44 / 57	48 / 62	50 / 63
6920, 6921, 6922	Integrated motor	750	251 / 50	468 / 187	548 / 267	619 / 506	28 / 41	45 / 57	50 / 62	51 / 63

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

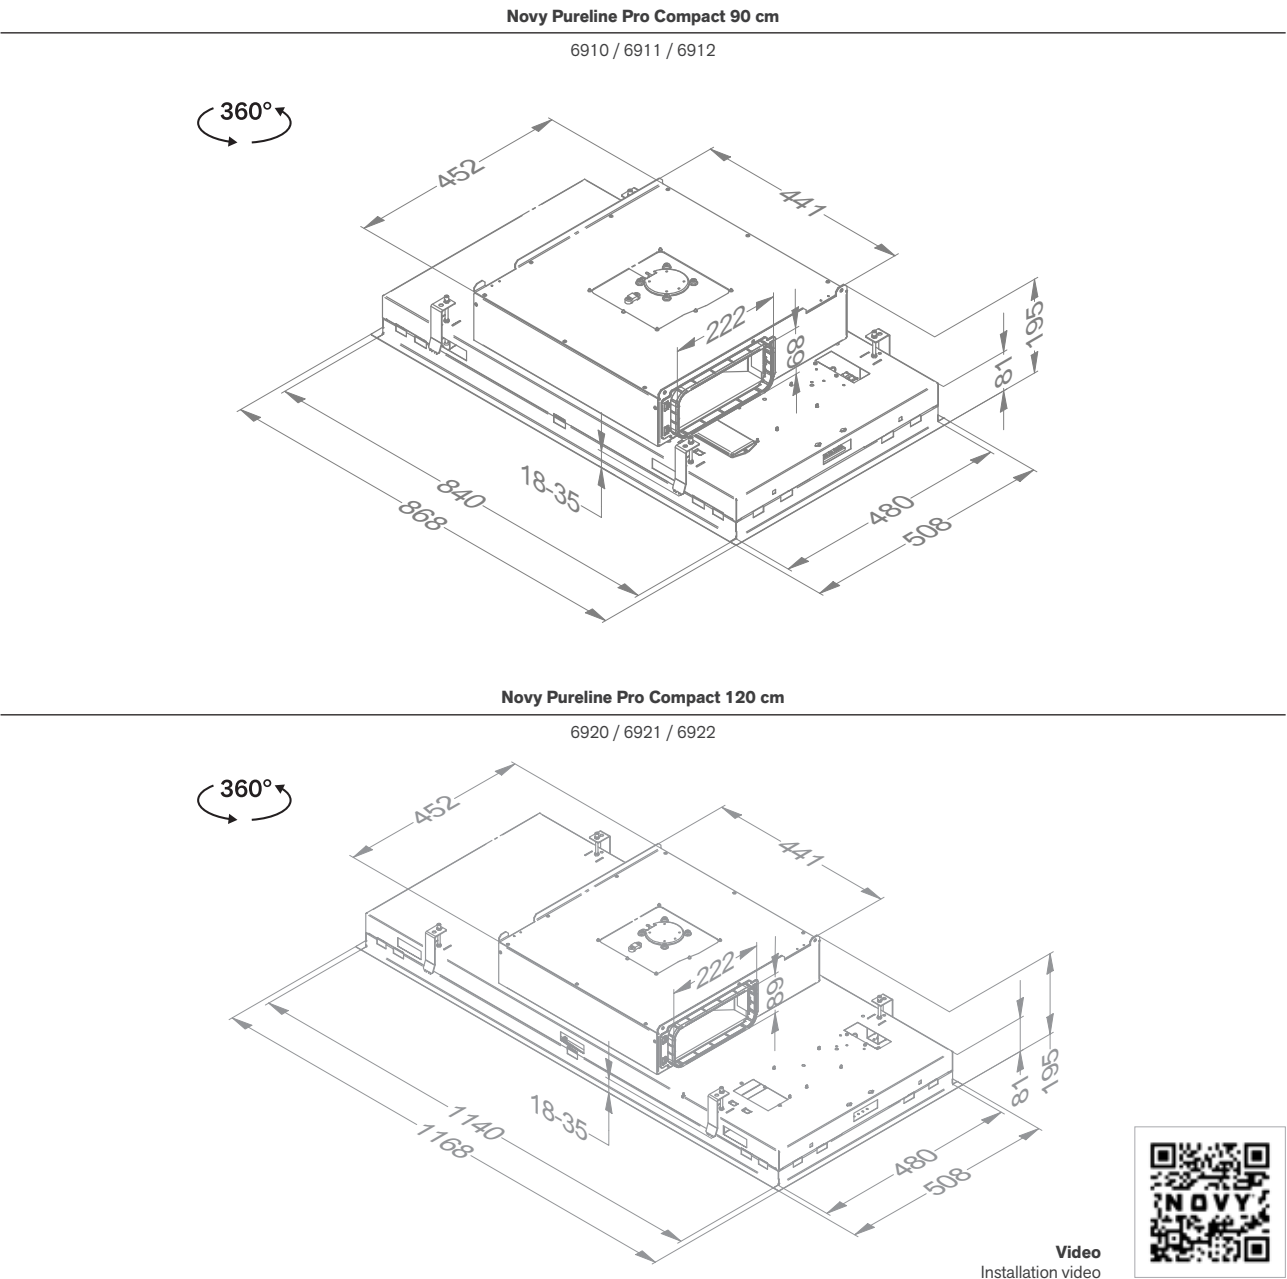


Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•
Input / output module	990.036	£204	•	•	•	•	•	•
Flat flexible tube (89×222×750 mm)	906.408	£94	•	•	•	•	•	•
Kit Novy Sense sensor for automatic speed control upon detection of cooking fumes and odour	6910.070	£279	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•



Technical drawings

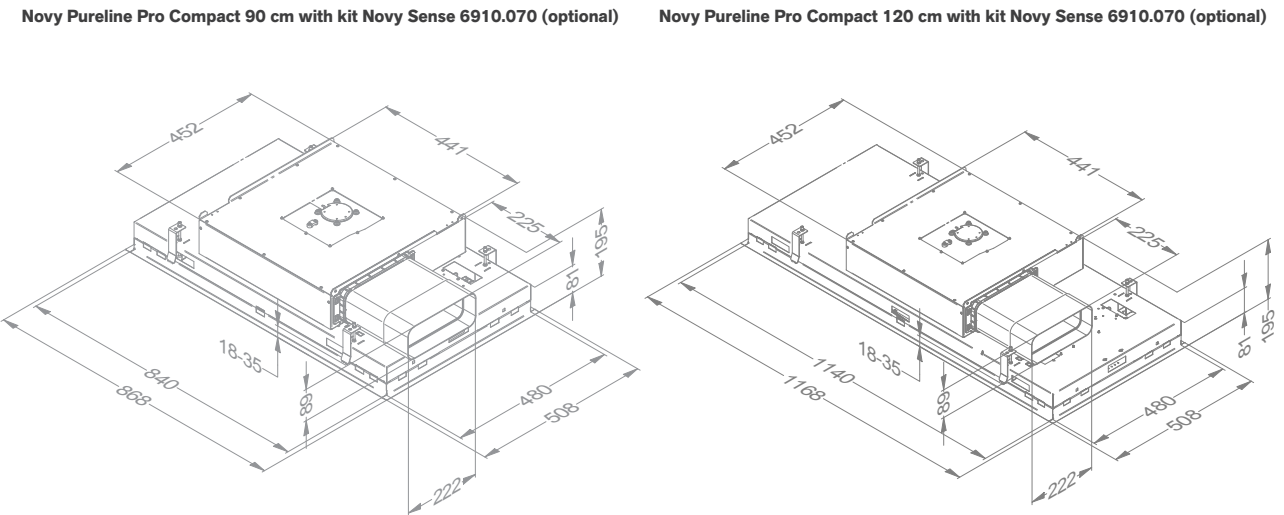

Accessories

	Reference	Price/pc	6910	6911	6912	6920	6921	6922
Recirculation with exhaust box								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•	•	•

Technical details recirculationboxes see p. 226-227





Novy Pureline Compact

- **Maximum efficiency** with ultra-quiet operation
- **LED lighting** with warm (2700K) or neutral (4000K) temperature
- **Low built-in height** of only 19.5 cm with compact motor
- **Easy operation:** Via remote control, InTouch or Novy Connect App
- **Flexible motor:** Rotatable in multiple directions
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



					Sound level during normal use in dB(A) (re 1 pW)			
Width (cm)	Motor	Colour	EEl	Flow power function (m³/h)	Minimum	Maximum	Ref.	Price/pc
90	Integrated, compact motor	Stainless steel	B	650	38	59	6810	£2,049
	Integrated, compact motor	White	B	650	38	59	6811	£2,049
	Integrated, compact motor	Mineral Black	B	650	38	59	6812	£2,049
120	Integrated, compact motor	Stainless steel	B	651	38	59	6820	£2,289
	Integrated, compact motor	White	B	651	38	59	6821	£2,289
	Integrated, compact motor	Mineral Black	B	651	38	59	6822	£2,289

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications



Functions		
Controls	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting		
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics		
Colour	6810 stainless steel 6811 white (≈RAL 9003) 6812 Mineral Black (≈RAL 9005)	6820 stainless steel 6821 white (≈RAL 9003) 6822 Mineral Black (≈RAL 9005)
Integrated motor	▪ (not removable)	▪ (not removable)
Weight cooker hood / motor casing (kg)	27.8	30.8
Mains voltage (V) / Electrical connection value (W)	230 / 171	230 / 171


Dimensions		
Dimensions (W×D×H) (mm)	868×508×195	1168×508×195
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	89×222	89×222
Exhaust position	Right / left / front / rear	Right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6810, 6811, 6812	Integrated motor	750	244 / 40	443 / 142	581 / 266	650 / 483	27 / 38	40 / 52	47 / 59	51 / 63
6820, 6821, 6822	Integrated motor	750	240 / 40	444 / 140	582 / 265	651 / 484	27 / 38	40 / 52	47 / 59	51 / 63



Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

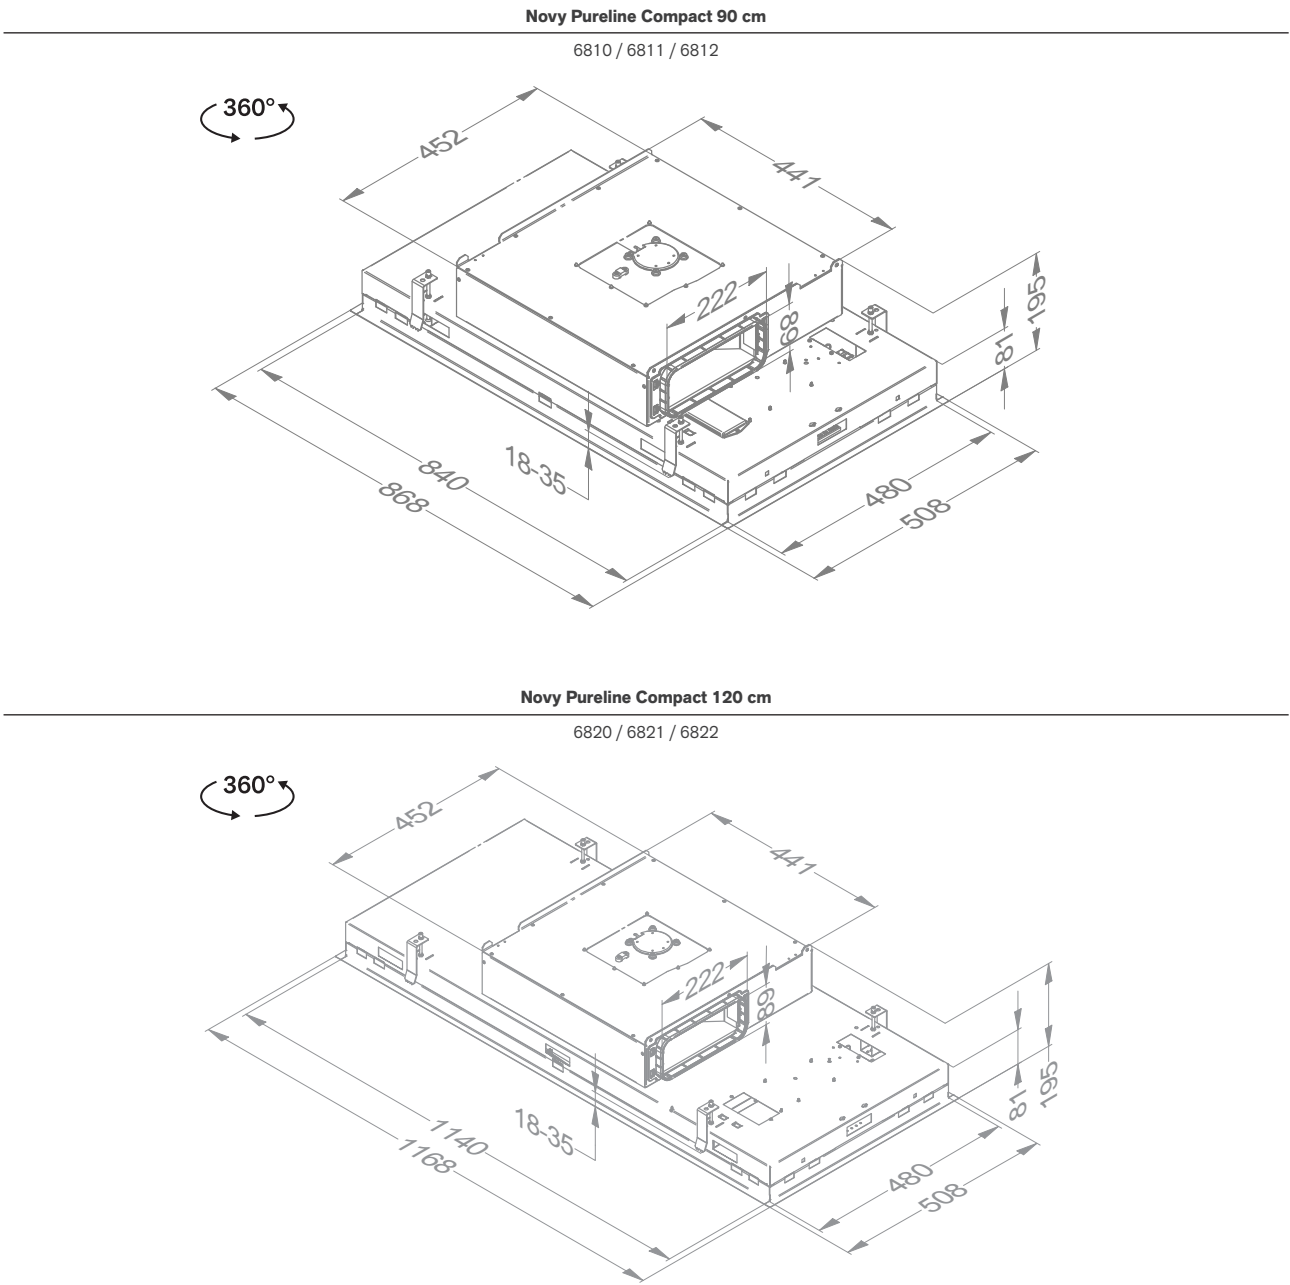

Accessories

	Reference	Price/pc	6810	6811	6812	6820	6821	6822
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	▪	▪	▪	▪	▪	▪
Kit connection with external cover and/or lighting	990.030	£169	▪	▪	▪	▪	▪	▪
Flat flexible tube (89×222×750 mm)	906.408	£94	▪	▪	▪	▪	▪	▪
Remote control (black)	840.049	£104	▪	▪	▪	▪	▪	▪

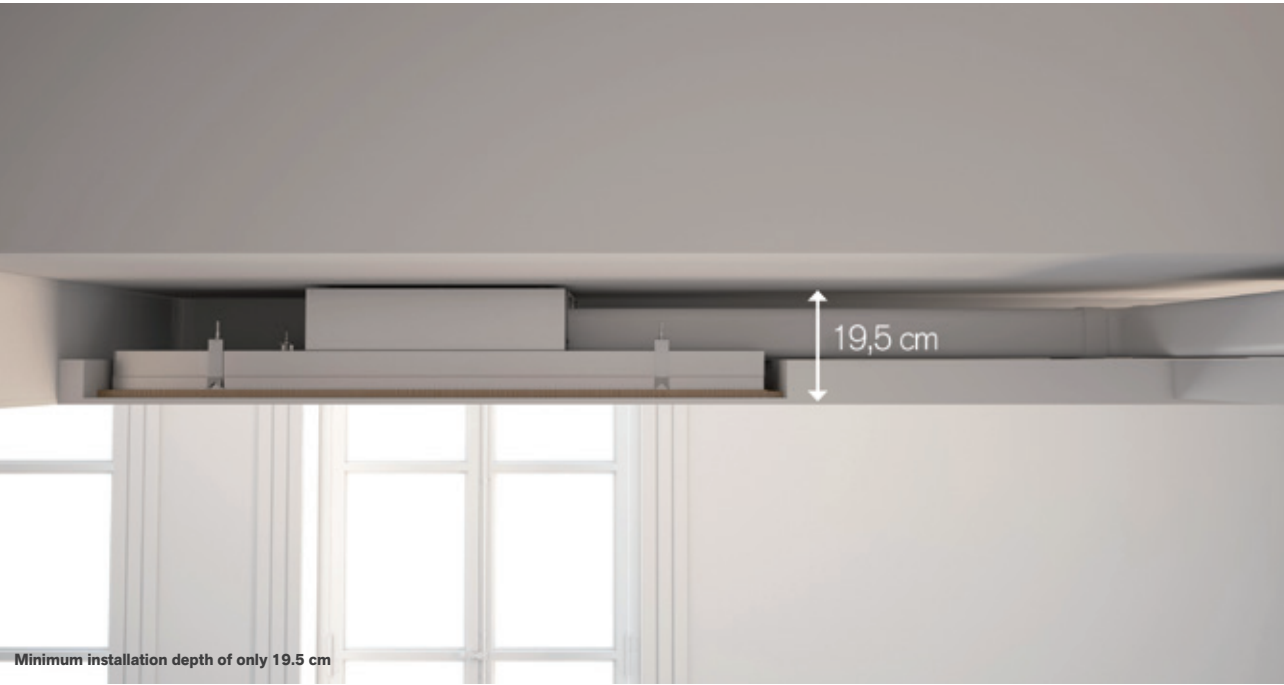

Accessories

	Reference	Price/pc	6810	6811	6812	6820	6821	6822
Recirculation with exhaust box								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	842.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	843.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	▪	▪	▪	▪	▪	▪
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	▪	▪	▪	▪	▪	▪
Mineral Black (≈RAL 9005)	7932.400	£484	▪	▪	▪	▪	▪	▪
Grey (≈RAL 7030)	7933.400	£484	▪	▪	▪	▪	▪	▪
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	▪	▪	▪	▪	▪	▪
Technical details recirculationboxes see p. 226-227								





NOVY

PREMIUM
INNOVATION
PRODUCT


Novy Pureline Pro

- **Maximum efficiency** yet extremely quiet
- **Adjustable light intensity** and colour temperature from 2,700 K to 5,000 K
- **Extensive lighting function:** LED strip with cooking and ambient mode
- **Cubic motor:** Rotatable in all directions, removable for indoor installation (optional kit)
- **Smart operation** via remote control, InTouch or Novy Connect App
- **Automatic speed control** with Novy Sense sensor for detection of cooking vapours and odours (optional)
- **Optional recirculation:** energy-efficient with a durable monoblock filter lasting up to 900 cooking hours

Novy Pureline Pro / Ceiling Units



108 – 109

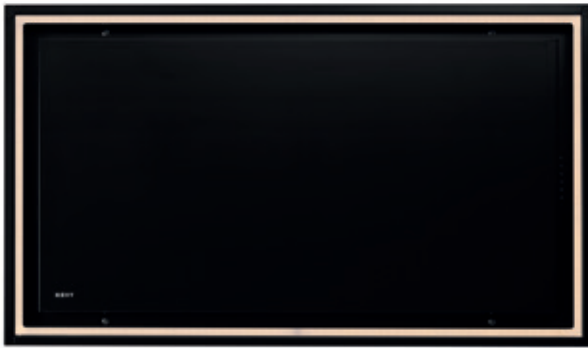

Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Novy Connect
Operation and settings possible via smartphone or tablet.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated, cubic motor or remotely inside ⁽²⁾	Stainless steel	A	713	41	59	6930	£2,409
	Integrated, cubic motor or remotely inside ⁽²⁾	White	A	713	41	59	6931	£2,409
	Integrated, cubic motor or remotely inside ⁽²⁾	Mineral Black	A	713	41	59	6932	£2,409
120	Integrated, cubic motor or remotely inside ⁽²⁾	Stainless steel	A	714	39	59	6940	£2,639
	Integrated, cubic motor or remotely inside ⁽²⁾	White	A	714	39	59	6941	£2,639
	Integrated, cubic motor or remotely inside ⁽²⁾	Mineral Black	A	714	39	59	6942	£2,639

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(2) To install the motor remotely, you should order the additional accessory 800.991.

Video
Novy Pureline Pro



Technical specifications



Functions		
Controls	Remote control (black) + Novy Connect	Remote control (black) + Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
Automatic speed control via Novy Connect	Optional (6930.060)	Optional (6930.060)
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪
Lighting		
Type of lighting (W)	LED (20) / dimmable	LED (21) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour ambient mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics		
Colour	6930 stainless steel 6931 white (≈RAL 9003) 6932 Mineral Black (≈RAL 9005)	6940 stainless steel 6941 white (≈RAL 9003) 6942 Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Possibility to remotely place the motor indoors	Optional (kit 800.991)	Optional (kit 800.991)
Weight cooker hood / motor casing (kg)	23 / 6	26 / 6
Mains voltage (V) / Electrical connection value (W)	230 / 230	230 / 230


Dimensions		
Dimensions (W×D×H) (mm)	868×508×319	1168×508×319
Height of ceiling unit incl. mounting clamps (without the motor box) (mm)	133	133
Opening (L×W) (mm)	845×485	1145×485
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / right / left / front / rear	Top / right / left / front / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600

Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6930, 6931, 6932	Integrated motor	975	275 / 123	470 / 349	616 / 383	713 / 385	28 / 41	40 / 52	46 / 59	49 / 61
6940, 6941, 6942	Integrated motor	975	262 / 98	466 / 343	617 / 391	714 / 391	27 / 39	40 / 52	46 / 59	49 / 62

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

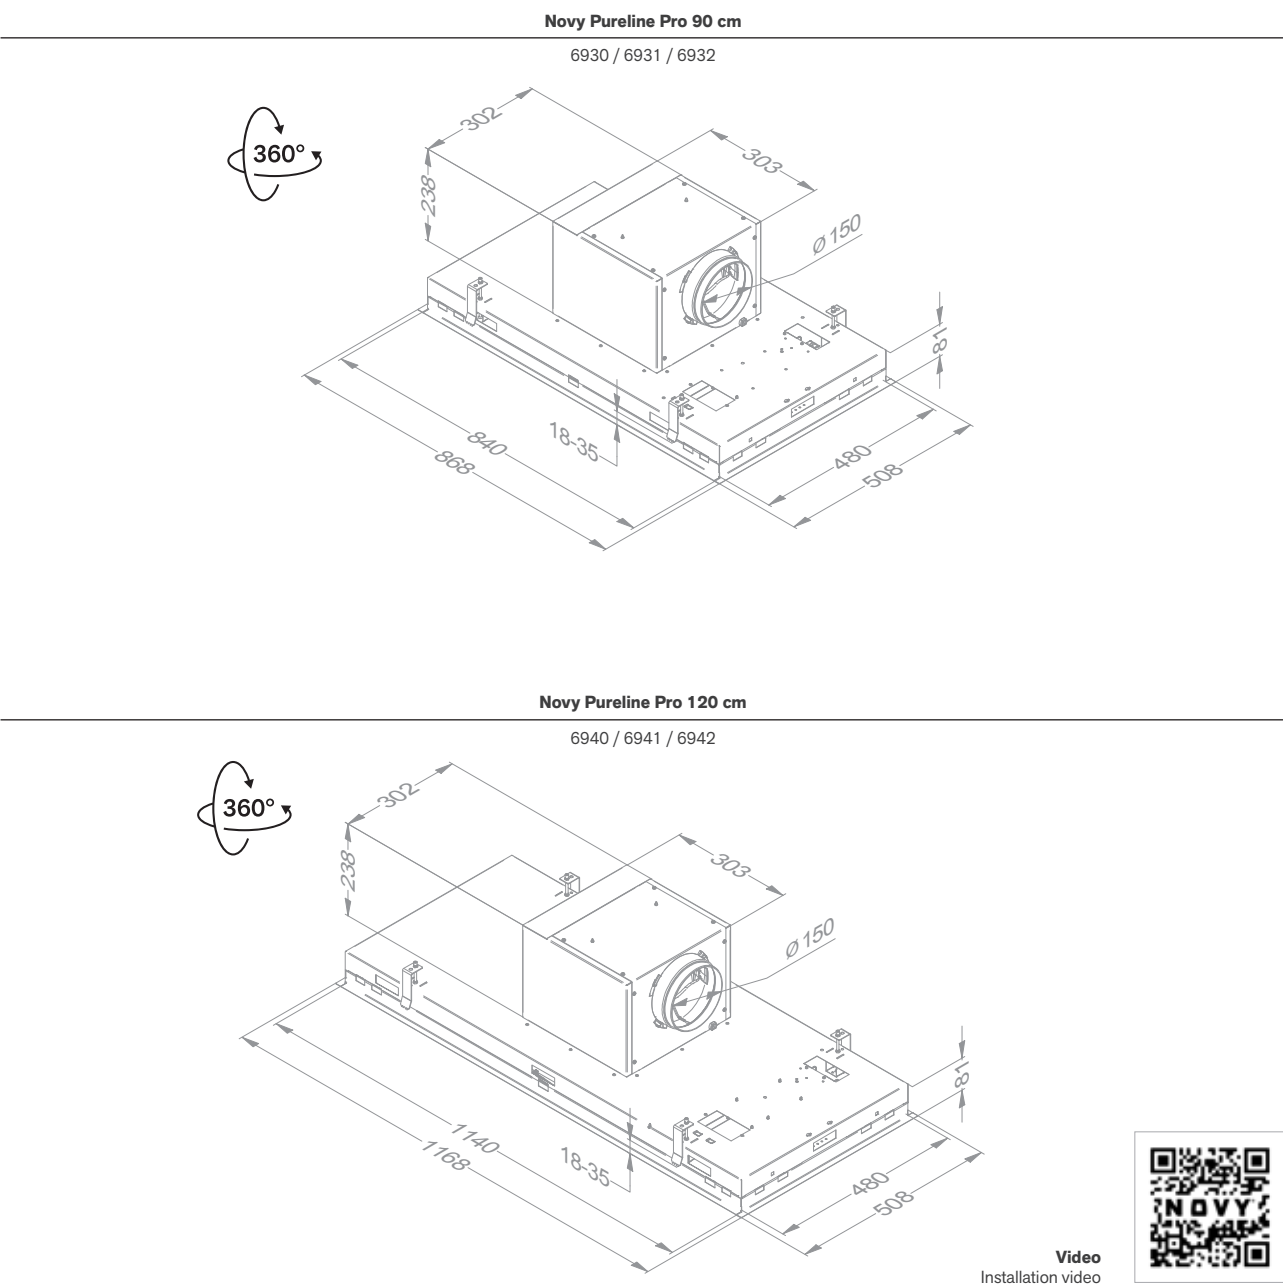


Accessories

	Reference	Price/pc	6930	6931	6932	6940	6941	6942
Miscellaneous								
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•
Kit to install the remote motor inside	800.991	£159	•	•	•	•	•	•
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6930.050	£264	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.094	£49	•	•	•	•	•	•
Input / output module	990.036	£204	•	•	•	•	•	•
Kit Novy Sense sensor for automatic speed control upon detection of cooking fumes and odour (in case of recirculation, always in combination with the exhaust box)	6930.060	£279	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•



Technical drawings

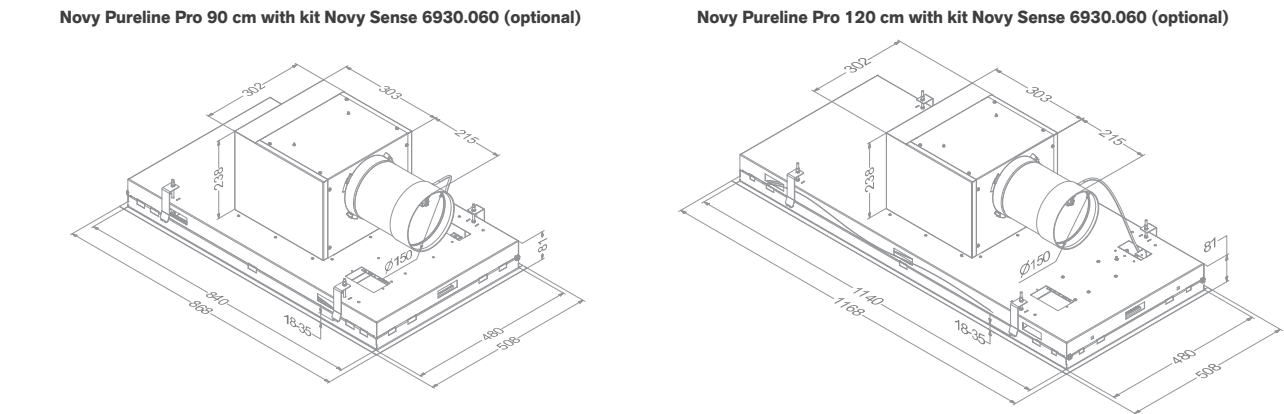

Accessories

	Reference	Price/pc	6930	6931	6932	6940	6941	6942
Recirculation with exhaust box								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•	•	•

Technical details recirculationboxes see p. 226-227





Novy Pureline with lighting

- **Maximum efficiency** yet extremely quiet operation
- **LED lighting** with warm (2700K) or neutral (4000K) tone
- **Cubic motor:** Fully rotatable, removable for remote installation
- **Optional setup** without motor for external motor use
- **Easy operation:** Via remote control or InTouch
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor or remote inside ⁽²⁾	Stainless steel	A+	634	34	55	6830	£2,049
	Integrated Cubic motor or remote inside ⁽²⁾	White	A+	634	34	55	6831	£2,049
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	6835	£1,569
	Not included ⁽¹⁾	White		⁽¹⁾	⁽¹⁾	⁽¹⁾	6836	£1,569
120	Integrated Cubic motor or remote inside ⁽²⁾	Stainless steel	A+	615	35	55	6840	£2,289
	Integrated Cubic motor or remote inside ⁽²⁾	White	A+	615	35	55	6841	£2,289
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	6845	£2,049
	Not included ⁽¹⁾	White		⁽¹⁾	⁽¹⁾	⁽¹⁾	6846	£2,049

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).
(2) To install the motor remotely, you should order the additional accessory 800.991.

Technical specifications

			
Novy Pureline 90 cm 6830 stainless steel / 6831 white	Novy Pureline 90 cm 6835 stainless steel / 6836 white Motor not included	Novy Pureline 120 cm 6840 stainless steel / 6841 white	Novy Pureline 120 cm 6845 stainless steel / 6846 white Motor not included

Functions				
Controls	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics				
Colour	6830 stainless steel 6831 white (≈RAL 9003)	6835 stainless steel 6836 white (≈RAL 9003)	6840 stainless steel 6841 white (≈RAL 9003)	6845 stainless steel 6846 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	Optional (kit 800.991)		Optional (kit 800.991)	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ ⁽¹⁾		▪ ⁽¹⁾
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 13 + motor	230 / 118	230 / 13 + motor





Dimensions				
Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (LxW) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

Air quantity and sound level

Ref.		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6830, 6831	Integrated motor	815	234 / 66	416 / 238	549 / 381	634 / 379	22 / 34	35 / 48	42 / 55	46 / 59
6835, 6836	Not included	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾
6840, 6841	Integrated motor	815	246 / 84	407 / 251	535 / 382	615/ 384	24 / 35	35 / 47	42 / 55	46 / 58
6845, 6846	Not included	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

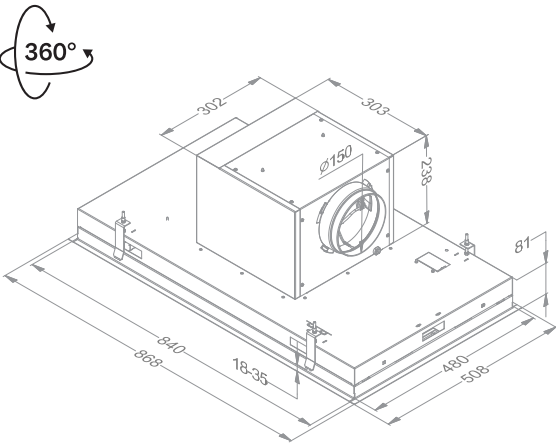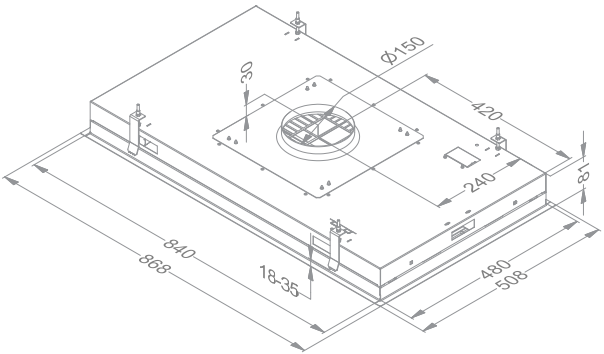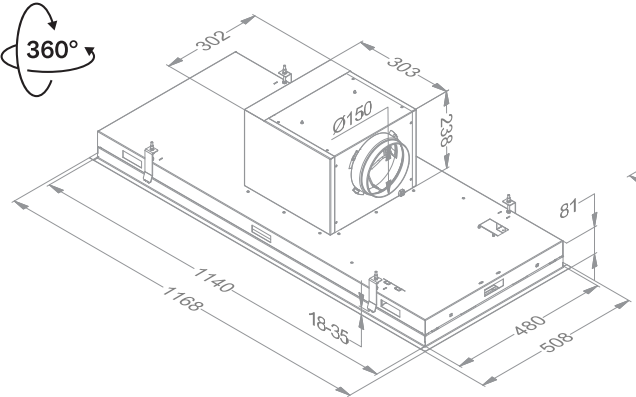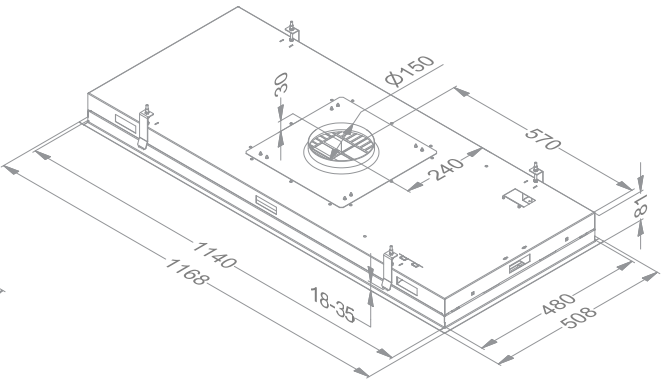Novy Pureline 90 cm	
6830 / 6831	6835 / 6836
	
Novy Pureline 120 cm	
6840 / 6841	6845 / 6846
	

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
Motor at a distance										
Remote motor for inside	245.999	£654			•	•			•	•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•	•			•	•
Roof motor 48.8 cm height	745.999	£1,784			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•	•			•	•
Technical details motors see p. 228-229										
Miscellaneous										
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•	•	•
Kit to install the remote motor inside	800.991	£159	•	•			•	•		
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£159	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£49	•	•			•	•		
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•	•



Accessories

	Reference	Price/pc	6830	6831	6835	6836	6840	6841	6845	6846
Recirculation with exhaust box										
Exhaust box with monoblock filter (500×295×270 mm)										
White (≈RAL 9003)	841.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	842.400	£484	•	•			•	•		
Grey (≈RAL 7030)	843.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•			•	•		
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)										
White (≈RAL 9003)	7931.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	7932.400	£484	•	•			•	•		
Grey (≈RAL 7030)	7933.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•			•	•		
Technical details recirculationboxes see p. 226-227										
Recirculation without exhaust box										
Monoblock filter (also replacement)	6830.060	£194	•	•			•	•		





Novy Pureline without lighting

- **Maximum efficiency** yet extremely quiet
- **No lighting**, external lighting can be connected
- **Cubic motor**: Fully rotatable, removable for remote installation
- **Optional setup** without motor for external motor use
- **Easy operation**: Via remote control or InTouch
- **Optional recirculation**: Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A++	624	35	55	6833	£2,049
	Integrated Cubic motor / remote inside ⁽²⁾	White	A++	624	35	55	6834	£2,049
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6838	£1,569
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6839	£1,569
120	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A++	611	36	55	6843	£2,289
	Integrated Cubic motor / remote inside ⁽²⁾	White	A++	611	36	55	6844	£2,289
	Not included ⁽¹⁾	Stainless steel		(1)	(1)	(1)	6848	£2,049
	Not included ⁽¹⁾	White		(1)	(1)	(1)	6849	£2,049

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to a wall motor or roof motor (see accessories).
(2) To install the motor remotely, you should order the additional accessory 800.991.

Technical specifications



Functions				
Controls	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪		▪	
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
External lighting to connect and operate with remote control (W)	Max. 300 (or with relay >300)	Max. 300 (or with relay >300)	Max. 300 (or with relay >300)	Max. 300 (or with relay >300)
Technical characteristics				
Colour	6833 stainless steel 6834 white (≈RAL 9003)	6838 stainless steel 6839 white (≈RAL 9003)	6843 stainless steel 6844 white (≈RAL 9003)	6848 stainless steel 6849 white (≈RAL 9003)
Integrated motor	▪		▪	
Option to install the remote motor inside	Optional (kit 800.991)		Optional (kit 800.991)	
Motor not included (suitable for wall motor, flat roof motor outside)		▪ ⁽¹⁾		▪ ⁽¹⁾
Weight cooker hood / motor casing (kg)	21.5 / 6	16.5 + motor	24.5 / 6	19.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 105	230 / 0 + motor	230 / 105	230 / 0 + motor

Dimensions				
Dimensions (W×D×H) (mm)	868×508×319	868×508×81	1168×508×319	1168×508×81
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133	133	133	133
Opening (L×W) (mm)	845×485	845×485	1145×485	1145×485
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top / right / left / front / rear	Top	Top / right / left / front / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–1600	600–1600	600–1600	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600	650–1600	650–1600	650–1600

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.


Air quantity and sound level

Type		Maximum flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1 pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6833, 6834	Integrated motor	815	256 / 86	417 / 235	549 / 382	624 / 382	24 / 35	35 / 47	42 / 55	46 / 58
6838, 6839	Not included	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾
6843, 6844	Integrated motor	815	227 / 69	398 / 240	530 / 381	611 / 382	26 / 36	35 / 46	42 / 55	46 / 57
6848, 6849	Not included	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾	⁽¹⁾


Noise levels measured in accordance with IEC 60704-2-13 standards, fl ow rates according to IEC 61591.

Technical drawings

Novy Pureline 90 cm	
6833 / 6834	6838 / 6839

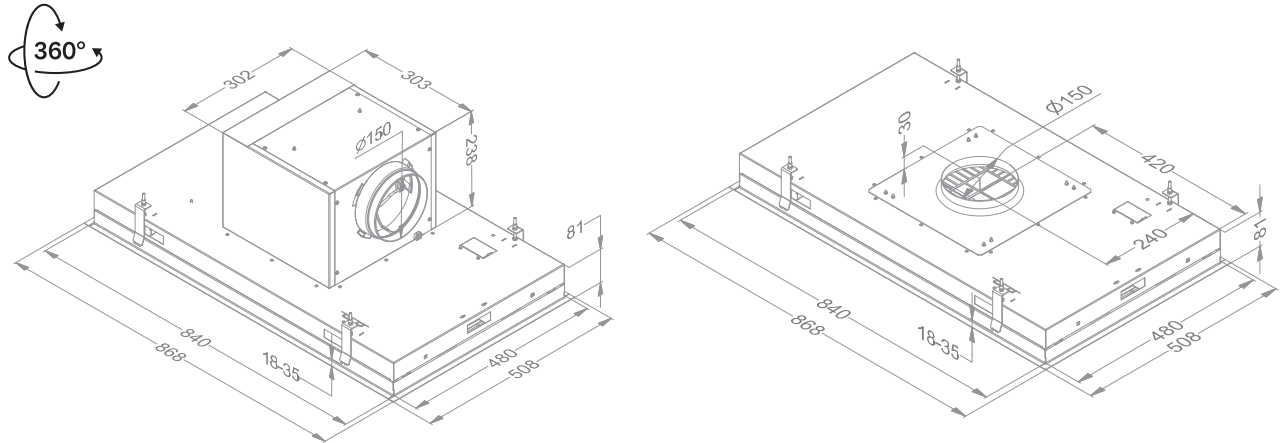

Novy Pureline 120 cm	
6843 / 6844	6848 / 6849

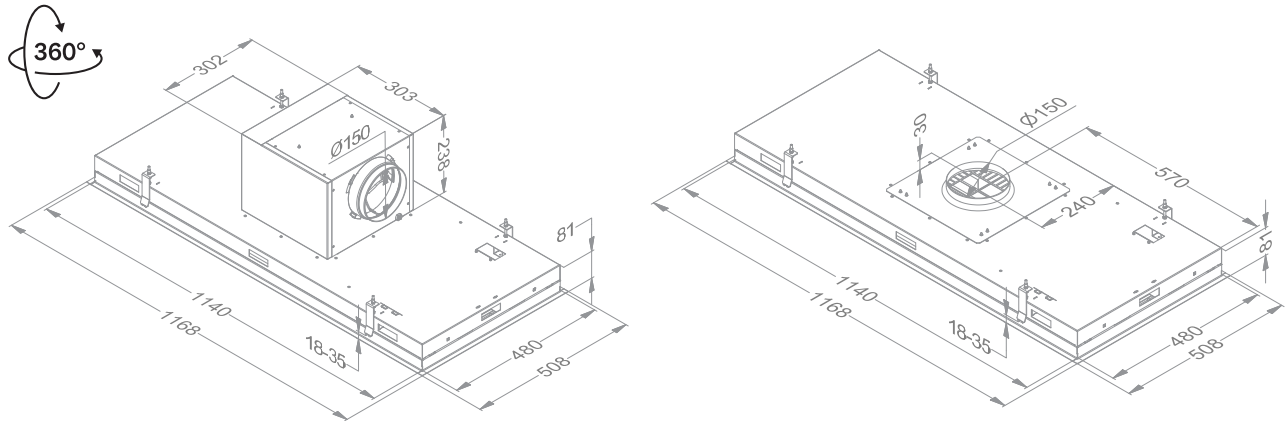

(1) These models should be connected to a wall motor or roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
Motor at a distance										
Remote motor for inside	245.999	£654			•	•			•	•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•	•			•	•
Roof motor 48.8 cm height	745.999	£1,784			•	•			•	•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•	•			•	•
Technical details motors see p. 228-229										
Miscellaneous										
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•	•	•	•	•	•	•
Kit to install the remote motor inside	800.991	£159	•	•			•	•		
Adapter to connect a flat duct (exhaust direction right, left, front, behind)	6830.053	£159	•	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•	•			•	•
Extension cable for remote motors (5 m)	7000.094	£49	•	•			•	•		
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•	•



Accessories

	Reference	Price/pc	6833	6834	6838	6839	6843	6844	6848	6849
Recirculation with exhaust box										
Exhaust box with monoblock filter (500×295×270 mm)										
White (≈RAL 9003)	841.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	842.400	£484	•	•			•	•		
Grey (≈RAL 7030)	843.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•			•	•		
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)										
White (≈RAL 9003)	7931.400	£484	•	•			•	•		
Mineral Black (≈RAL 9005)	7932.400	£484	•	•			•	•		
Grey (≈RAL 7030)	7933.400	£484	•	•			•	•		
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•			•	•		
Technical details recirculationboxes see p. 226-227										
Recirculation without exhaust box										
Monoblock filter (also replacement)	6830.060	£194	•	•			•	•		





Novy Maxi Pureline

- **Maximum efficiency** with powerful operation
- **No lighting**, external lighting can be connected
- **Industrial look**
- **No motor**: Connectable to 2 indoor or outdoor motors
- **Extra large**: Ideal for optimal extraction
- **Easy operation**: Via remote control or InTouch
- **Optional recirculation**: Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	Maximum		
150	Not included ⁽¹⁾	Stainless steel	⁽¹⁾	⁽¹⁾	⁽¹⁾	855	£2,534
	Not included ⁽¹⁾	White	⁽¹⁾	⁽¹⁾	⁽¹⁾	856	£2,534

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to 2 internal motors, wall motors or flat roof motors (see accessories).

Technical specifications



Novy Maxi Pureline
855 stainless steel / 856 white

Functions	
Controls	Buttons + remote control (white)
Number of speed settings	3 + power function
Power setting with automatic downshift (min.)	6
Recirculation	Optional (in combination with 2 inside motors 245.999)
InTouch function for hobs	•
Auto-Stop, automatic switch-off after 3 hours	•
Run-on timer (min.)	10
Cleaning indicator for grease filter	•
Replacement indicator for recirculation filter	•

Lighting	
External lighting to connect and operate with remote control (optional) (W)	Max. 300 (or with relay>300)

Technical characteristics	
Colour	855 stainless steel 856 white (≈RAL 9003)
Motor not included (suitable for remote motor inside, wall motor or flat roof motor outside)	• (1)
Weight cooker hood / motor casing (kg)	35 + motors
Mains voltage (V) / Electrical connection value (W)	230 / 0 + motors


Dimensions (mm)	
Dimensions (W×D×H) (mm)	1460×670×90
Height of ceiling unit including mounting clamps (without the motor box) (mm)	133
Opening (LxW) (mm)	1438×648
Exhaust opening diameter (mm)	2×150
Exhaust position	2×top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	600 –1600
Recommended installation height with an electric or ceramic cooker(Hmin–Hmax) (mm)	600–1600
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–1600

Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A)			
						sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
855–856	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

(1) This cooker hood should be connected to 2x remote motor inside, 2x wall motor or 2x roof motor (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical drawings

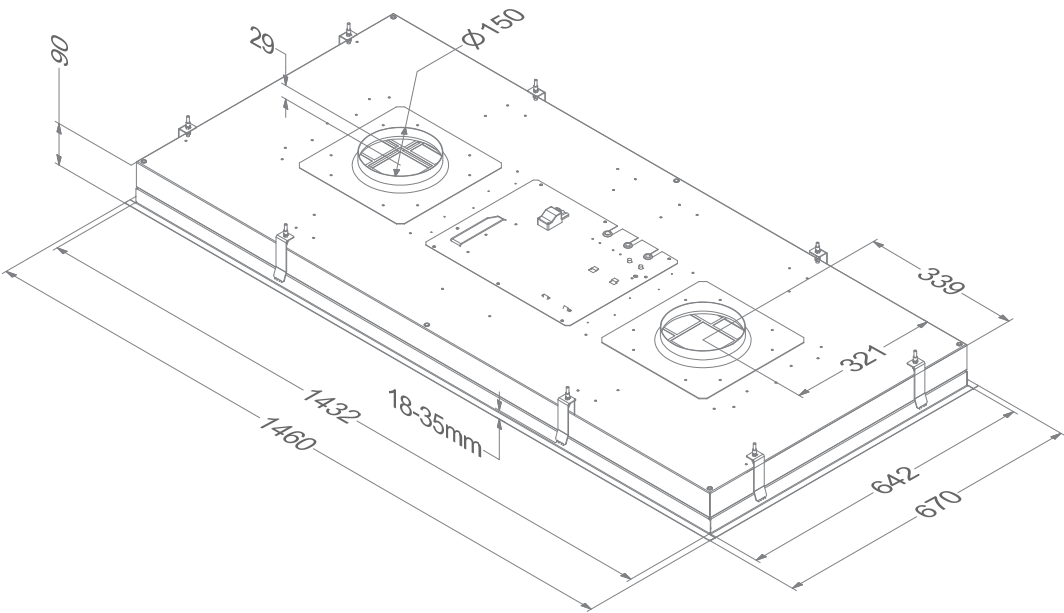

Accessories

	Reference	Price/pc	855	856
Motor at a distance				
Remote motor for inside (2 pcs to order)	245.999	£654	•	•
Wall motor, minimum 5 m between cooker hood and motor (2 pcs to order)	445.999	£1,064	•	•
Roof motor 48.8 cm height (2 pcs to order)	745.999	£1,784	•	•
Roof motor with noise reduction 78.4 cm height (2 pcs to order)	755.999	£2,049	•	•
Technical details motors see p. 228-229				
Miscellaneous				
Grease filter (replacement) (2 pcs to order)	7400.020	£104	•	•
Adapter to connect a flat duct (exhaust direction 1x left, 1x right) (2 pcs to order)	830.053	£159	•	•
Extension cable for remote motors (5 m) (2 pcs to order)	7000.092	£49	•	•
Kit connection with external cover and/or lighting	990.030	£169	•	•
Remote control (black)	840.049	£104	•	•



Accessories

	Reference	Price/pc	855	856
Recirculation with exhaust box				
Exhaust box with monoblock filter (500×295×270 mm)				
White (≈RAL 9003) (2 pcs to order)	841.400	£484	•	•
Mineral Black (≈RAL 9005) (2 pcs to order)	842.400	£484	•	•
Grey (≈RAL 7030) (2 pcs to order)	843.400	£484	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)				
White (≈RAL 9003) (2 pcs to order)	7931.400	£484	•	•
Mineral Black (≈RAL 9005) (2 pcs to order)	7932.400	£484	•	•
Grey (≈RAL 7030) (2 pcs to order)	7933.400	£484	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•
Technical details recirculationboxes see p. 226-227				
Recirculation without exhaust box				
Kit with monoblock filters	850.400	£369	•	•
Monoblock replacement filter for 850.400 (2 pcs to order)	7300.055	£169	•	•



Built-in cooker hoods

for deep cabinets

Novy
Mini Pureline



Novy Crystal



Novy
Canopy
Essence



Width of cabinet or canopy			
60 cm	☐	☐	☐
90 cm	☐	☐	☐
Colour			
White	☐	☐	
Stainless steel	☐		☐
Mineral Black	☐	☐	
Motor			
Integrated	☐	☐	☐
At a distance (inside)	Optional		
Exhaust			
To the outside	☐	☐	☐
Recirculation	Optional	Optional	Optional



Novy Mini Pureline

- **Integration** in decorative hood or alcove
- **Dimmable LED lighting** with warm (2700K) or neutral (4000K) tones
- **Cubic motor:** Fully rotatable, removable for remote installation
- **Optional recirculation:** Monoblock filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.
75 cm: 810, 811, 816
85 cm: 820, 821, 826



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.




Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A	534	37	54	810	£1,444
	Integrated Cubic motor / remote inside ⁽²⁾	White	A	534	37	54	811	£1,444
	Integrated Cubic motor / remote inside ⁽²⁾	Mineral Black	A	534	37	54	816	£1,444
90	Integrated Cubic motor / remote inside ⁽²⁾	Stainless steel	A+	601	37	52	820	£1,569
	Integrated Cubic motor / remote inside ⁽²⁾	White	A+	601	37	52	821	£1,569
	Integrated Cubic motor / remote inside ⁽²⁾	Mineral Black	A+	601	37	52	826	£1,569

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(2) To install the motor remotely, you should order the additional accessory 800.996.

Technical specifications

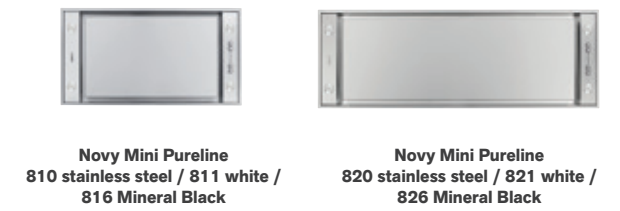

Functions		
Controls	Buttons + remote control (white)	Buttons + remote control (white)
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪

Lighting		
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700 or 4,000	2,700 or 4,000
External lighting to connect and operate with remote control	Optional (kit 990.030)	Optional (kit 990.030)

Technical characteristics		
Colour	810 stainless steel 811 white (≈RAL 9003) 816 Mineral Black (≈RAL 9005)	820 stainless steel 821 white (≈RAL 9003) 826 Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Option to install the remote motor inside	Optional (kit 800.996)	Optional (kit 800.996)
Weight cooker hood / motor casing (kg)	10 / 5	12 / 5
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 121


Dimensions		
Dimensions (W×D×H) (mm)	560×301×330	860×301×330
Opening (L×W) (mm)	545×286	845×286
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / front / left / right / rear	Top / front / left / right / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–850

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
810, 811, 816	Integrated motor	815	205 / 79	333 / 219	399 / 322	534 / 370	26 / 37	37 / 49	42 / 54	49 / 61
820, 821, 826	Integrated motor	815	237 / 79	379 / 225	451 / 329	601 / 372	26 / 37	36 / 48	40 / 52	47 / 59

Noise levels measured in accordance with IEC 60704-2-13 standards, fl ow rates according to IEC 61591.

Technical drawings

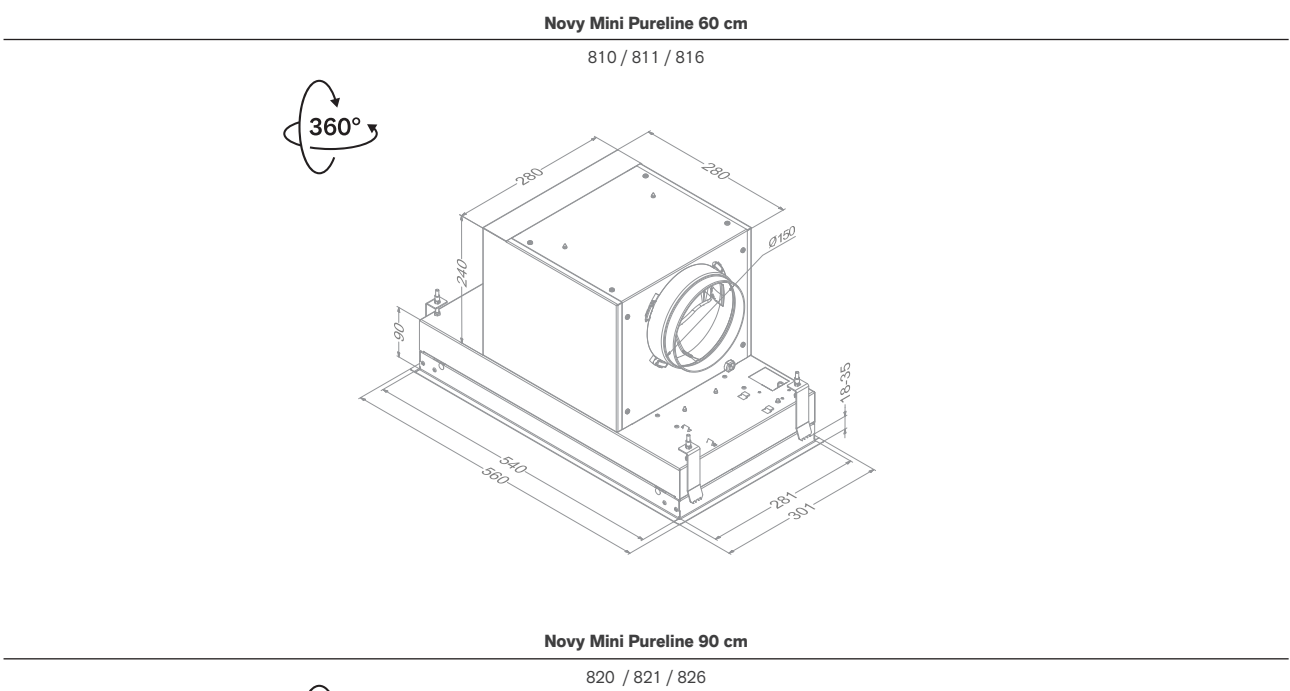

Accessories

	Reference	Price/pc	810	811	816	820	821	826
Miscellaneous								
Grease filter (replacement)	609.014	£69	•	•	•			
Grease filter (replacement)	7400.020	£104				•	•	•
Kit to install the remote motor inside	800.996	£159				•	•	•
Adapter to connect a flat duct (air outlet positioning: front and rear only)	830.053	£159				•	•	•
Extension cable for remote motors (5 m)	7000.096	£49	•	•	•	•	•	•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•

Accessories

	Reference	Price/pc	810	811	816	820	821	826
Recirculation with exhaust box								
Exhaust box with monoblock filter (500×295×270 mm)								
White (≈RAL 9003)	841.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)								
White (≈RAL 9003)	7931.400	£484	•	•	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•	•	•
Technical details recirculationboxes see p. 226-227								

Recirculation with exhaust box								
Monoblock filter (also replacement)	811.400	£159	•	•	•			
Kit with monoblock filters	820.400	£184				•	•	•
Monoblock replacement filter for recirculation kit 820.400	7300.055	£169				•	•	•





Novy Crystal

- **Integration** in decorative hood or alcove
- **Dimmable LED strip** (3000K) for bright lighting
- **Discreet finish** with white or black glass
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours





Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



In option




Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated Cubic motor	White glass	B	600	39	52	26050	£844
	Integrated Cubic motor	Black glass	B	600	39	52	26052	£844
90	Integrated Cubic motor	White glass	B	592	40	51	26080	£964
	Integrated Cubic motor	Black glass	B	592	40	51	26082	£964

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Accessories

	Reference	Price/pc	26050	26052	26080	26082
Miscellaneous						
Grease filter (replacement)	26050.020	£79	•	•	•	•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•

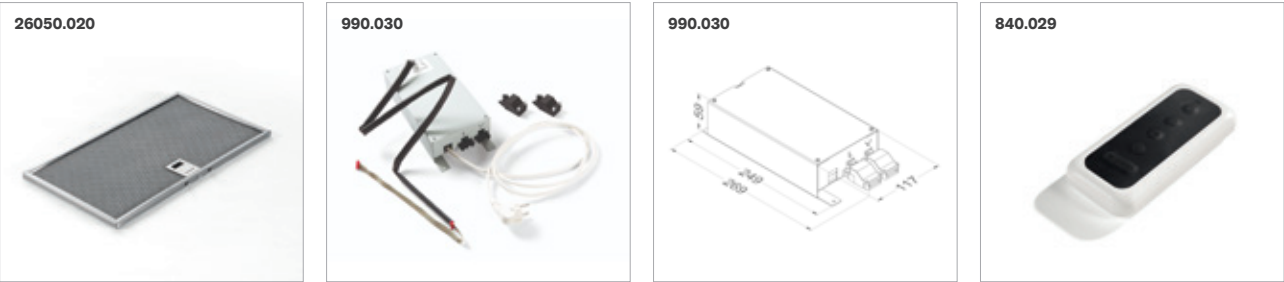

Accessories

	Reference	Price/pc	26050	26052	26080	26082
Recirculation with exhaust box						
Exhaust box with monoblock filter (500×295×270 mm)						
White (≈RAL 9003)	841.400	£484	•	•	•	•
Mineral Black (≈RAL 9005)	842.400	£484	•	•	•	•
Grey (≈RAL 7030)	843.400	£484	•	•	•	•
Monoblock replacement filter for exhaust box 841.400, 842.400 and 843.400	830.055	£169	•	•	•	•
Low built-in box (140 mm high) with monoblock filter (820×292×140 mm)						
White (≈RAL 9003)	7931.400	£484	•	•	•	•
Mineral Black (≈RAL 9005)	7932.400	£484	•	•	•	•
Grey (≈RAL 7030)	7933.400	£484	•	•	•	•
Monoblock replacement filter for exhaust box 7931.400, 7932.400 and 7933.400 (2 pcs to order)	7900.055	£159	•	•	•	•
Technical details recirculationboxes see p. 226-227						
Recirculation without exhaust box						
Kit with monoblock filters	26050.400	£184	•	•	•	•
Monoblock replacement filter for recirculation kit 26050.400	26050.055	£169	•	•	•	•





Novy Canopy Essence

- **Built-in inox group** for decorative hood or alcove
- **Easy operation** for user convenience
- **LED lighting (2700K)** for warm kitchen atmosphere
- **Optional recirculation** with carbon cartridges



Distance
Maximum distance between cooker hood and hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	517	37	58	828	£604
90	Integrated	Stainless steel	B	521	34	58	829 ⁽³⁾	£669

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.

Technical specifications



			
		Novy Canopy Essence 60 cm 828	Novy Canopy Essence 90 cm 829
Functions			
Controls		Buttons	Buttons
Number of speed settings		4	4
Recirculation		Optional (carbon filter cartridge)	Optional (carbon filter cartridge)
Cleaning indicator for grease filter		▪	▪
Replacement indicator for recirculation filter		▪	▪
Lighting			
Type of lighting (number/W)		LED (2×2)	LED (2×2)
Technical characteristics			
Colour		Stainless steel	Stainless steel
Lighting colour (K)		2,700	2,700
Integrated motor		▪	▪
Weight cooker hood / motor casing (kg)		10	11,5
Mains voltage (V) / Electrical connection value (W)		230 / 167	230 / 168
Dimensions			
Dimensions (W×D×H) (mm)		546×296×279	846×296×279
Opening (LxW) (mm)		525×275	825×275
Exhaust opening diameter (mm)		150	150
Exhaust position		Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)		650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)		600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)		650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
828	Integrated motor	581	202 / 274	299 / 392	398 / 458	517 / 492	26 / 37	33 / 44	42 / 53	47 / 58
829	Integrated motor	581	199 / 259	299 / 381	399 / 451	521 / 488	23 / 34	28 / 39	40 / 51	47 / 58


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

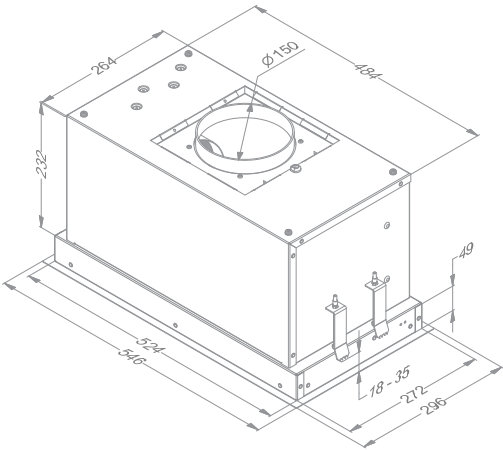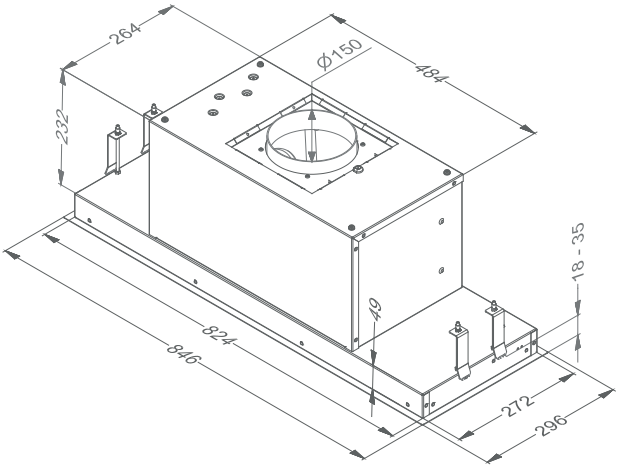Novy Canopy Essence 60 cm	Novy Canopy Essence 90 cm
828	829
	

Accessories

	Reference	Price/pc	828	829
Miscellaneous				
Kit with LED lighting (4,000 K)	906.303	£79	•	•
Grease filter (replacement)	828.020	£104	•	
Grease filter (replacement) (2 pcs to order)	829.020	£104		•
Recirculation without exhaust box				
Carbon cartridge (also replacement)	6200.055	£79	•	•

906.303 	828.020 	829.020 	6200.055 
---	---	---	--



Telescopic cooker hoods

for shallow cabinets

Novy
Fusion Pro



Novy Fusion



Novy
Telescopic



Novy
Telescopic
Essence



Width of cabinet or canopy

60 cm	☐	☐	☐	☐
90 cm	☐	☐	☐	☐
120 cm	☐			

Colour

White	☐	☐		
Stainless steel			☐	☐
Anthracite	☐			

Motor

Integrated	☐	☐	☐	☐
------------	--------------------------	--------------------------	--------------------------	--------------------------

Exhaust

To the outside	☐	☐	☐	☐
Recirculation	Optional	Optional	Optional	Optional

p. 154

p. 160


p. 164

p. 170

Seamless integration into shallow wall cabinet

Discover all assets

Novy Fusion Pro meets the demand for designer cooker hoods in shallow wall cabinets. With this highly developed concept, Fusion Pro, like Fusion, is concealed and integrated into a shallow wall cabinet. Discover all the advantages.

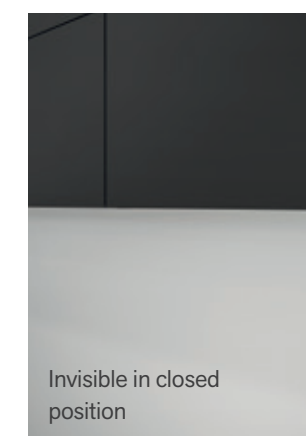



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Fusion Pro

- **Full integration** in wall cabinet with 300-360 mm depth
- **Tilting flap** in transparant glass for optimum capture of cooking fumes
- **Invisible** in closed position
- **Dimmable LED strip** with 3000K temperature
- **Convenient storage space** in the upper cabinet thanks to seamless finish
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours

Novy Fusion Pro / Telescopic cooker hoods



154 – 155



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Anthracite / Anthracite glass	A+	637	47	58	8710	£1,499
	Integrated	White / transparant glass	A+	637	47	58	8711	£1,499
90	Integrated	Anthracite / Anthracite glass	A	633	47	58	8740	£1,739
	Integrated	White / transparant glass	A	633	47	58	8741	£1,739
120	Integrated	Anthracite / Anthracite glass	A	632	47	58	8770	£2,084
	Integrated	White / transparant glass	A	632	47	58	8771	£2,084

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Fusion Pro



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOODS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOBS



GAS HOBS



DESIGNER
LIGHTING



INFO

Technical specifications


			
	Novy Fusion Pro 60 cm 8710 anthracite + glass 8711 white + glass	Novy Fusion Pro 90 cm 8740 anthracite + glass 8741 white + glass	Novy Fusion Pro 120 cm 8770 anthracite glass 8771 white + glass
Functions			
Controls	Touch control	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6
With noise reduction	•	•	•
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	•	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•	•
Run-on timer (min.)	10	10	10
Cleaning indicator for grease filter	•	•	•
Replacement indicator for recirculation filter	•	•	•
Lighting			
Type of lighting (W)	LED strip (14), dimmable	LED strip (23), dimmable	LED strip (23), dimmable
Lighting colour (K)	3,000	3,000	3,000
Technical characteristics			
Colour	8710 Anthracite (≈RAL 7016) 8711 White (≈RAL 9003)	8740 Anthracite (≈RAL 7016) 8741 White (≈RAL 9003)	8770 Anthracite (≈RAL 7016) 8741 White (≈RAL 9003)
Oblique front cover for handleless kitchens	•	•	•
Integrated motor	•	•	•
Weight cooker hood / motor casing (kg)	11	14	17
Mains voltage (V) / Electrical connection value (W)	230 / 115	230 / 124	230 /124
Dimensions			
Dimensions (W×D×H) (mm)	600×300/360×340	900×300/360×340	1200×300/360×340
Width cabinet (mm)	600	900	1200
Minimal/maximal depth cabinet (mm)	300-360	300-360	300-360
Thickness side panel cabinet (mm)	16–19	16–19	16–19
Exhaust opening diameter (mm)	150	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m3/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
8710, 8711	Integrated motor	815	362 / 178	495 / 351	566 / 386	637 / 400	35 / 47	42 / 54	46 / 58	49 / 61
8740, 8741	Integrated motor	815	357 / 176	491 / 349	561 / 383	633 / 391	35 / 47	42 / 54	45 / 58	48 / 61
8770, 8771	Integrated motor	815	361 / 178	493 / 354	547 / 386	632 / 397	34 / 47	42 / 55	46 / 58	49 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

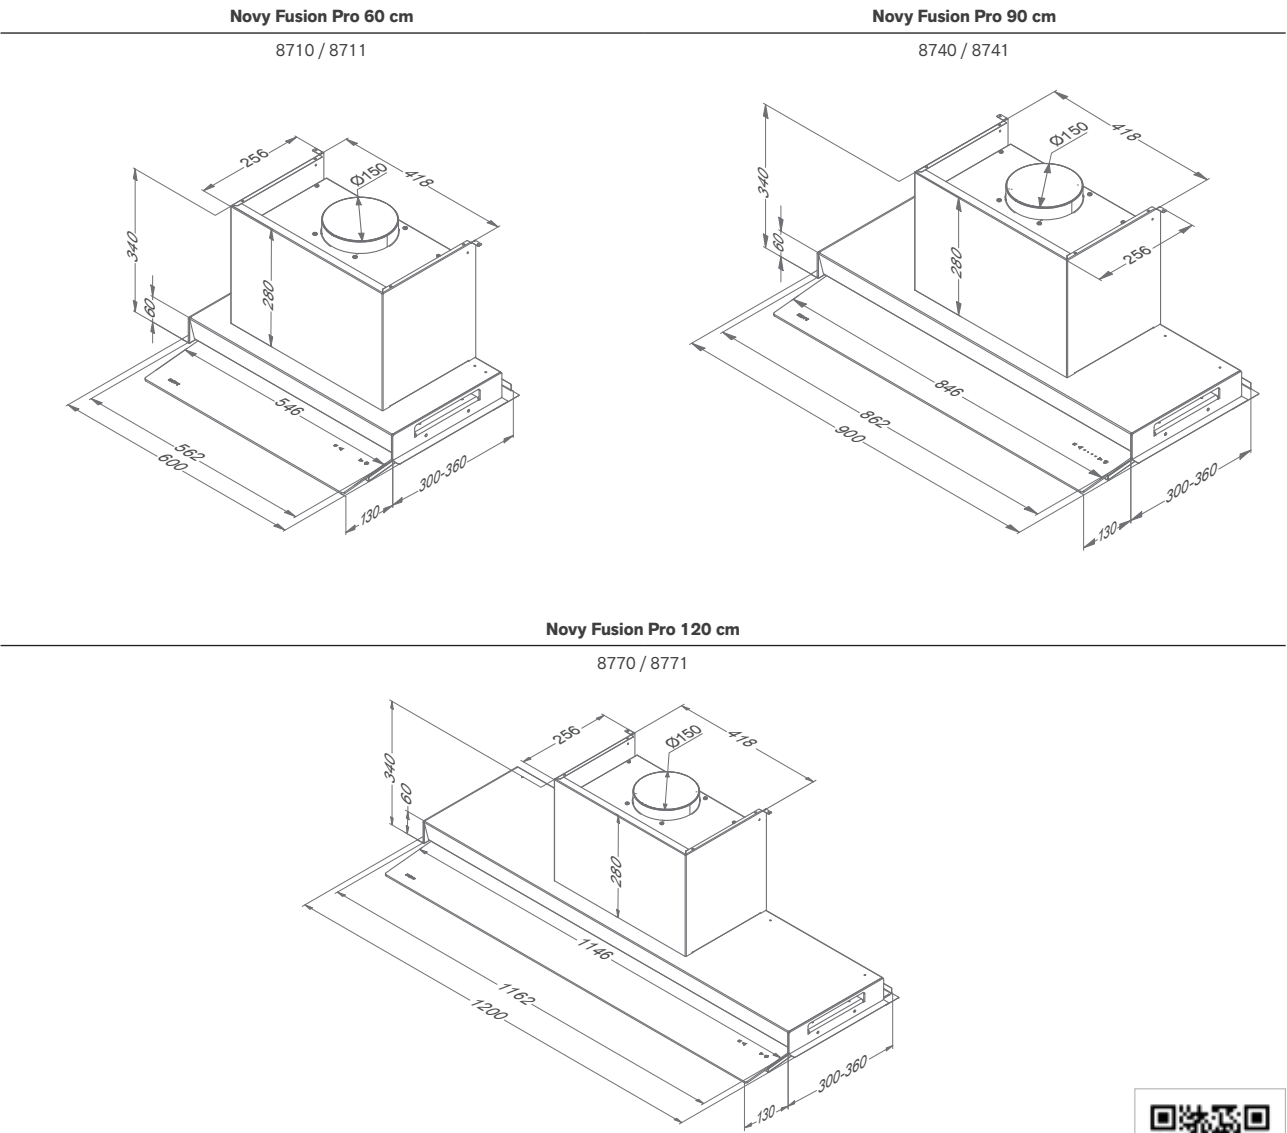



Video
Novy Fusion Pro Installation





Accessories

	Reference	Price/pc	8710	8711	8740	8741	8770	8771
Miscellaneous								
Grease filter (replacement) (1 pc to order)	680.021	£104.00	•	•				
Grease filter (replacement) (2 pcs to order)	680.020	£104.00			•	•		
Grease filter (replacement) (2 pcs to order)	680.021	£104.00					•	•
Chimney extension antracite (fixation on shelf)	8840.8175	£194	•		•		•	
Chimney extension white (fixation on shelf)	8840.8165	£194		•		•		•
Remote control (white)	840.029	£104	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•
Recirculation without exhaust box								
Monoblock filter (also replacement)	680.400	£184	•	•	•	•	•	•
Exhaust grill for upper cabinet*	906.450	£159	•	•	•	•	•	•
* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm								

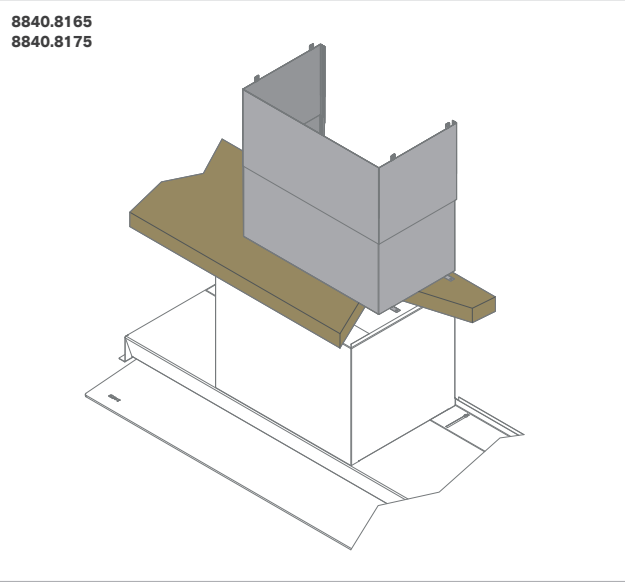



Novy Fusion

- **Fully integrated** in shallow cabinet with 32cm depth
- **Tilting flap** in white glass for optimum capture of cooking fumes
- **Invisible** in closed position
- **Subtle touch control**
- **Dimmable LED strip** with 3000K temperature
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours





Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



In option




Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	White / White glass	A	619	39	58	680	£1,314
90	Integrated	White / White glass	A	635	40	58	686	£1,559

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications

		
	Novy Fusion 60 cm 680 white glass	Novy Fusion 90 cm 686 white glass
Functions		
Controls	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	•	•
Recirculation	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•
Lighting		
Type of lighting (number/W)	LED strip (9), dimmable	LED strip (16), dimmable
Lighting colour (K)	3,000	3,000
Technical characteristics		
Colour	White	White
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	12.5	15.2
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 126
Dimensions (mm)		
Dimensions (W×D×H) (mm)	520×280×320	820×280×320
Opening(W×D) (mm)	505×265	805×265
Exhaust opening diameter (mm)	150	150
Exhaust position	Top / rear	Top / rear
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Technical drawings

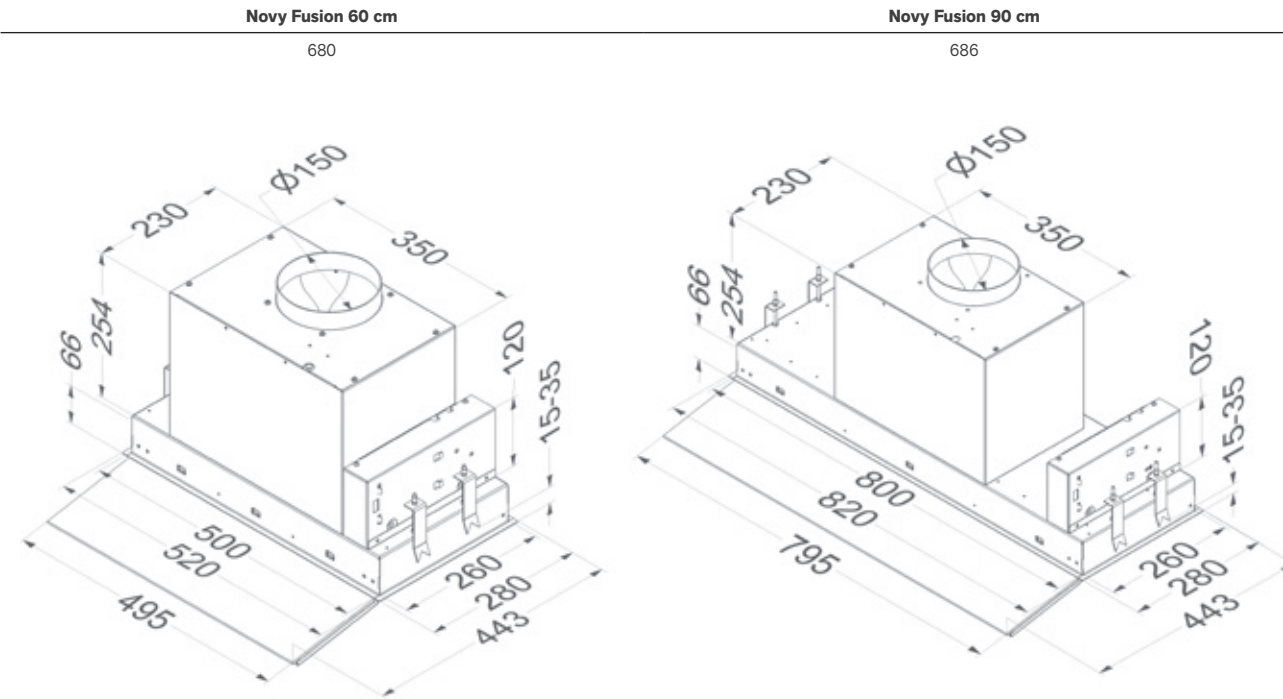

Accessories

	Reference	Price/pc	689	686
Miscellaneous				
Grease filter (replacement)	680.020	£104	•	
Grease filter (replacement) (2 pcs to order)	680.020	£104		•
Remote control (white)	840.029	£104	•	•
Remote control (black)	840.049	£104	•	•
Recirculation without exhaust box				
Monoblock filter (also replacement)	680.400	£184	•	•
Exhaust grill for upper cabinet*	906.450	£159	•	•

* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm

Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
Type			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
680	Integrated motor	815	245 / 83	408 / 246	537 / 397	619 / 391	27 / 39	38 / 51	46 / 58	49 / 61
686	Integrated motor	815	254 / 83	422 / 254	554 / 392	635 / 390	27 / 40	39 / 51	45 / 58	49 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.





Novy Telescopic

- **Telescopic slide** for maximum vapour capture
- **Handy shelf space** for herb rack
- **Custom front profile** in line with the wall cabinet
- **LED lighting** with 2700K temperature
- **Easy operation** with knob or buttons
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.

InTouch
Function for controlling the cooker hood from the hob for 663, 669 (optional)

Recirculation
Recirculation is optional.

In option:
663
693

Width (cm)	Motor	Colour	Controls	EEI	Maximum Flow Rate (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
						Minimum	Maximum		
60	Integrated	Stainless steel	Knob	C	346	49	60	661	£909
	Integrated	Stainless steel	Knob	D	594	55	63	662	£1,154
	Integrated	Stainless steel	Buttons	C	614	47	58	663	£1,409
90	Integrated	Stainless steel	Knob	C	348	48	60	691 ⁽³⁾	£1,124
	Integrated	Stainless steel	Knob	C	587	50	61	692	£1,434
	Integrated	Stainless steel	Buttons	C	605	43	55	693	£1,684

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones.

Technical specifications

			
	Novy Telescopic 60 cm 661 stainless steel	Novy Telescopic 60 cm 662 stainless steel	Novy Telescopic 60 cm 663 stainless steel
Functions			
Controls	Knob	Knob	Buttons
Number of speed settings	3	3	3 + power function
Power setting with automatic downshift (min.)			6
With noise reduction	▪	▪	▪
Recirculation	Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
InTouch function for hobs			Optional
Auto-Stop, automatic switch-off after 3 hours			▪
Run-on timer (min.)			10
Cleaning indicator for grease filter			▪
Replacement indicator for recirculation filter			▪
Lighting			
Type of lighting (number/W)	LED (2×2)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700	2,700
Technical characteristics			
Colour side profile	Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
Integrated motor	▪	▪	▪
Weight cooker hood / motor casing (kg)	12	13	13
Mains voltage (V) / Electrical connection value (W)	230 / 103	230 / 182	230 / 181
Dimensions			
Dimensions (W×D×H) (mm)	598×290×348	598×290×405	598×290×405
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×450	600×280×450	600×280×450
Opening (mm)	560-570×180	560-570×180	560-570×180
Exhaust opening diameter (mm)	125	150	150
Exhaust position	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750


		
Novy Telescopic 90 cm 691 stainless steel	Novy Telescopic 90 cm 692 stainless steel	Novy Telescopic 90 cm 693 stainless steel
Knob	Knob	Buttons
3	3	3 + power function
		6
▪	▪	▪
Optional (monoblock)	Optional (monoblock)	Optional (monoblock)
		Optional
		▪
		10
		▪
		▪
LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700
Stainless steel (replaceable)	Stainless steel (replaceable)	Stainless steel (replaceable)
▪	▪	▪
16	18	18
230 / 101	230 / 194	230 / 200
898×290×348	898×290×348	898×290×348
900×280×450	900×280×450	900×280×450
860-870×180	860-870×180	860-870×180
125	150	150
Top	Top	Top
650–750	650–750	650–750
600–750	600–750	600–750
650–750	650–750	650–750

Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
661	Integrated motor	470	212 / 252	255 / 290	346 / 344		38 / 49	43 / 54	48 / 60	
662	Integrated motor	940	387 / 267	464 / 326	594 / 408		43 / 55	47 / 58	51 / 63	
663	Integrated motor	940	285 / 187	397 / 287	473 / 336	614 / 411	36 / 47	43 / 55	47 / 58	51 / 63
691	Integrated motor	470	215 / 273	257 / 318	348 / 379		36 / 48	41 / 52	48 / 60	
692	Integrated motor	940	353 / 313	423 / 347	587 / 397		39 / 50	43 / 55	50 / 61	
693	Integrated motor	940	259 / 153	356 / 225	436 / 262	605 / 318	32 / 43	39 / 50	43 / 55	50 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.


Technical drawings

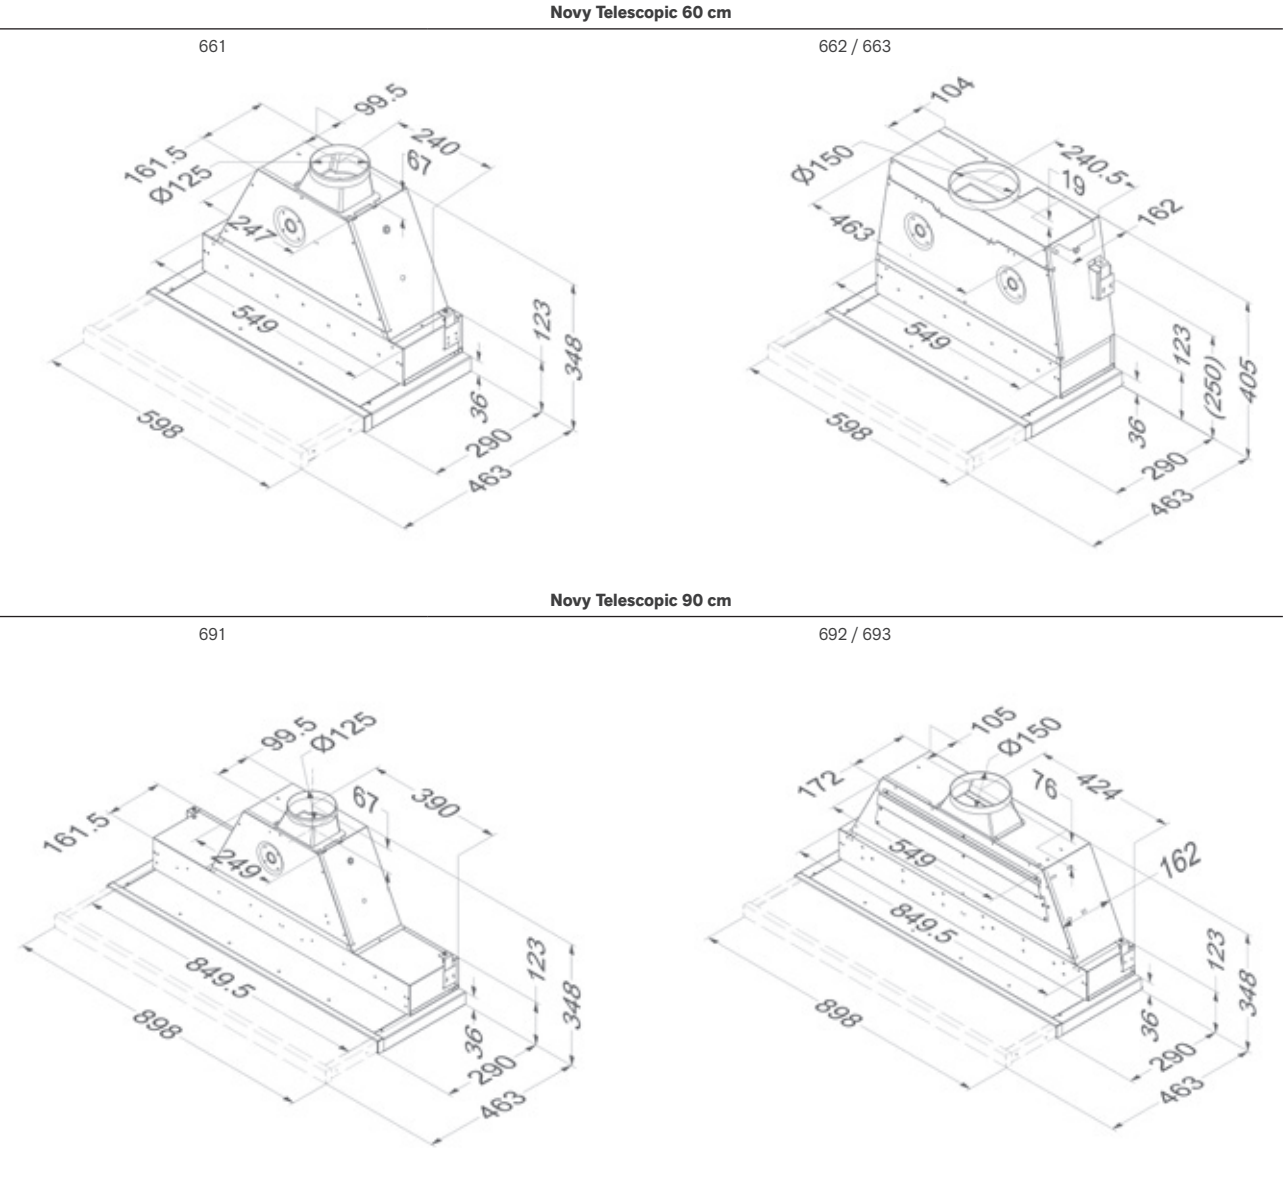

Accessories

	Reference	Price/pc	661	662	663	691	692	693
Miscellaneous								
Kit with LED lighting (4,000 K)	906.303	£79	•	•	•	•	•	•
Grease filter (replacement)	605.014	£69	•	•	•			
Grease filter (replacement) (2 pcs to order)	609.014	£69				•	•	•
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£159			•			•
Kit connection with external cover and/or lighting	990.030	£169			•			•
Recirculation without exhaust box								
Kit with monoblock filters	662.400	£194	•	•	•			
Monoblock replacement filter for kit 662.400	662.060	£149	•	•	•			
Kit with monoblock filters	692.400	£239				•	•	•
Monoblock replacement filter for kit 692.400	692.060	£194				•	•	•
Exhaust grill for upper cabinet*	906.450	£159		•	•		•	•

* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm

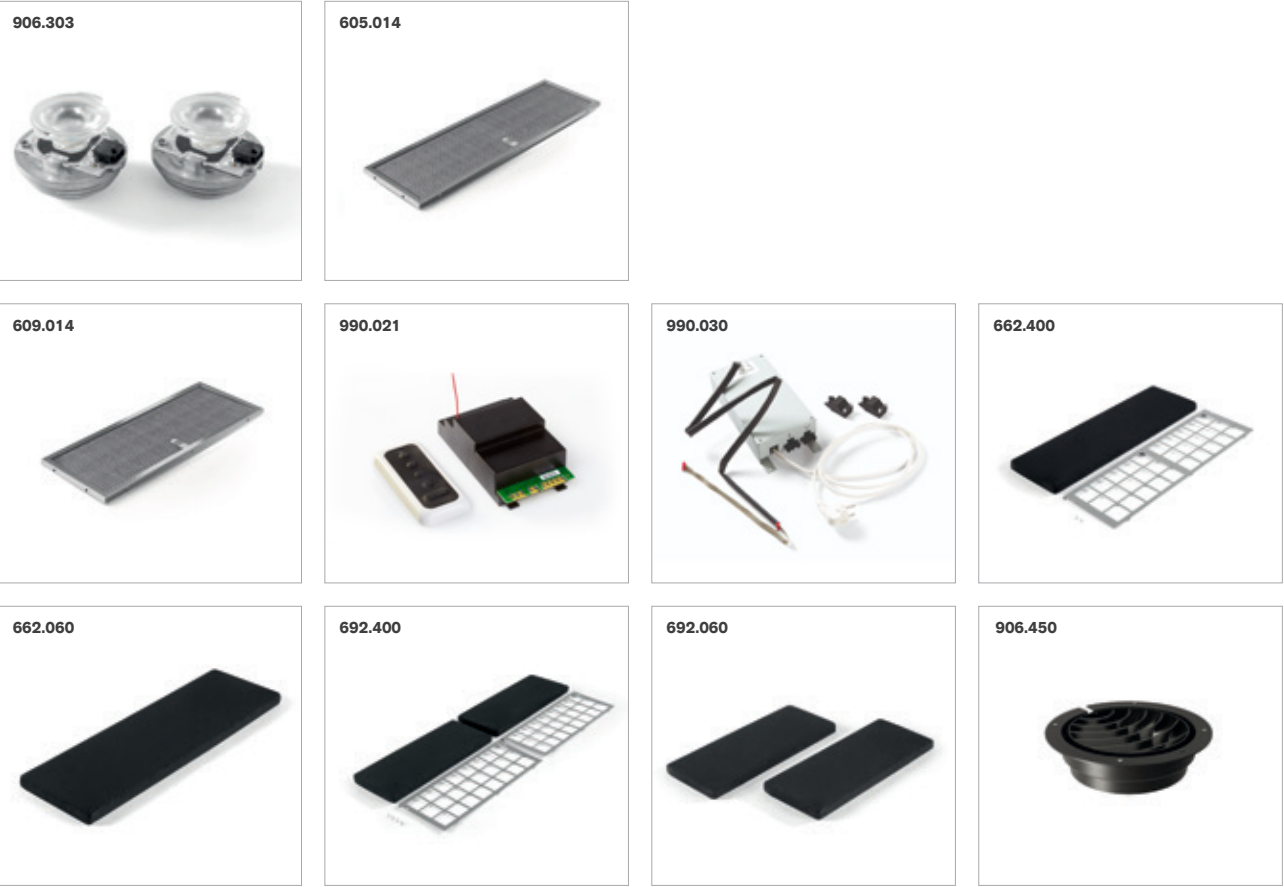



Novy Telescopic Essence

- **Integrated in line** with the wall cabinet
- **Telescopic slide** for maximum vapour capture
- **LED lighting** with 2700K temperature
- **Easy installation:** Mounts to intermediate shelf
- **Included filler piece** for variable cabinet depths
- **Optional recirculation** with carbon cartridges



Distance
Maximum distance between cooker hood and hob.



Recirculation
Recirculation is optional.




Width (cm)	Motor	Colour	EEI	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	B	501	33	56	650	£719
90	Integrated	Stainless steel	B	522	34	58	655 ⁽³⁾	£779

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(3) This model is only to be used above a hob with maximum 4 cooking zones. Provide for a kitchen cupboard with no bottom.

Technical specifications

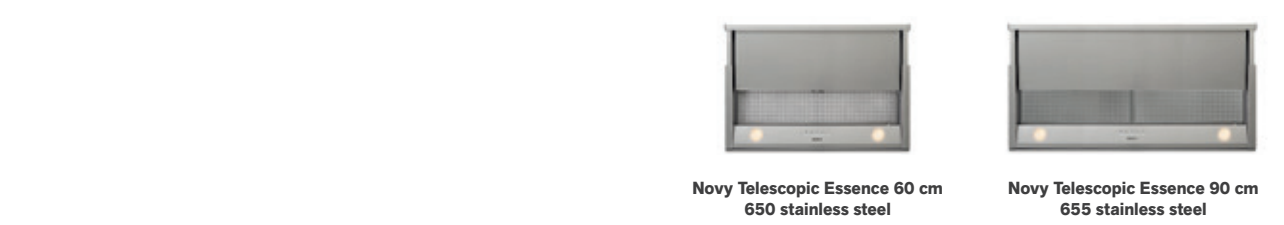

Functions		
Controls	Buttons	Buttons
Number of speed settings	4	4
Recirculation	Optional (carbon filter cartridge)	Optional (carbon filter cartridge)
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Lighting		
Type of lighting (number/W)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700

Technical characteristics		
Colour side profile	Stainless steel (not replaceable)	Stainless steel (not replaceable)
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	10	12
Mains voltage (V) / Electrical connection value (W)	230 / 162	230 / 165


Dimensions		
Dimensions (W×D×H) (mm)	598×290×316	898×290×316
Minimum dimensions of cabinet (W×D×H) (mm)	600×280×300	900×280×300
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
650	Integrated motor	581	192 / 271	290 / 381	387 / 442	501 / 480	21 / 33	28 / 39	38 / 49	45 / 56
655	Integrated motor	581	206 / 282	303 / 374	405 / 445	522 / 482	23 / 34	31 / 42	42 / 53	46 / 58


Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

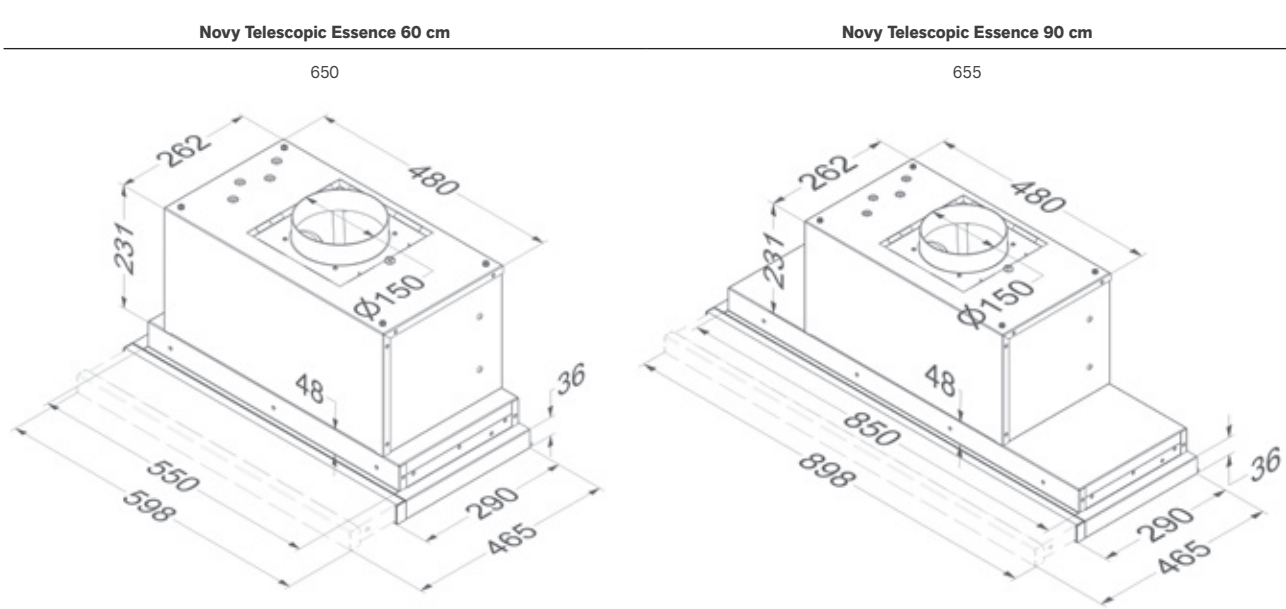

Accessories

	Reference	Price/pc	650	655
Miscellaneous				
Kit with LED lighting (4,000 K)	906.303	£79	•	•
Grease filter (replacement)	650.020	£104	•	
Grease filter (replacement) (2 pcs to order)	655.020	£104		•
Recirculation without exhaust box				
Carbon cartridge (also replacement)	6200.055	£79	•	•
Exhaust grill for upper cabinet*	906.450	£159	•	•
* Tailored design exhaust grill for upper cabinets to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm				

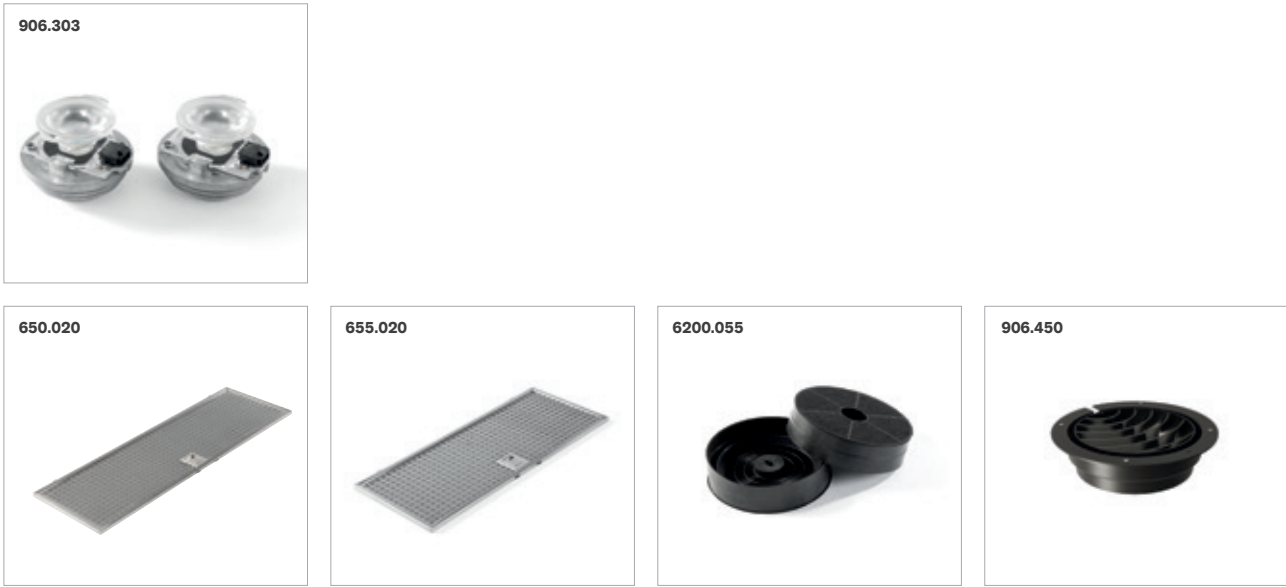



Wall-mounted cooker hoods

Novy Vision



Novy Flatline



Novy Salsa



Width			
60 cm			■
75 cm	■		
90 cm	■	■	■
120 cm		■	
Colour			
White	■		
Stainless steel		■	■
Mineral Black		■	
Black	■		
Motor			
Integrated	■	■	■
Not included	■	■	
Exhaust			
To the outside	■	■	■
Recirculation	■	Optional	Optional

p. 176

p. 184

p. 190



Novy Vision

- **Modern sleek look** in black or white glass
- **No chimney needed:** Exhaust to the back
- **Subtle LED light** (2700K) for a warm feel
- **Recirculation models:** Monoblock filter lasts 900 cooking hours





Distance
Maximum distance between cooker hood and hob.



InTouch
Function for controlling the cooker hood from the hob in option



Recirculation
Standard for: 7856, 7859, 7836, 7839









In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
75	Integrated	Black / black	A+	788	35	51	7853 ⁽³⁾	£1,444
	Integrated	White / stainless steel	A+	788	35	51	7851 ⁽³⁾	£1,444
	Integrated	Black / black		478	45	64	7856 ⁽³⁾ Recirculation	£1,444
	Integrated	White / stainless steel		478	45	64	7859 ⁽³⁾ Recirculation	£1,444
90	Integrated	Black / black	A+	780	35	51	7833	£1,894
	Integrated	White / stainless steel	A+	780	35	51	7831	£1,894
	Not included	Black / black		⁽¹⁾	⁽¹⁾	⁽¹⁾	7834 ⁽¹⁾	£1,444
	Integrated	Black / black		490	45	66	7836 Recirculation	£1,894
	Integrated	White / stainless steel		490	45	66	7839 Recirculation	£1,894

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.
(3) These models are only to be used above a hob up to 65 cm wide and with up to 4 cooking zones.

Technical specifications



Novy Vision 75 cm
7853 black glass / black
7851 white glass / st. steel



Novy Vision 75 cm
7856 black glass / black
7859 white glass / st. steel



Novy Vision 90 cm
7833 black glass / black
7831 white glass / st. steel



Novy Vision 90 cm
7834 black glass / black
Motor not included



Novy Vision 90 cm
7836 black glass / black
7839 white glass / st. steel

Functions		
Controls	Touch control	Touch control
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation		▪ (monoblock)
InTouch function for hobs	Optional	Optional
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	30
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter		▪

Lighting		
Type of lighting (number/W)	LED (2×2)	LED (2×2)
Lighting colour (K)	2,700	2,700

Technical characteristics		
Integrated motor	▪	▪
Motor not included (suitable for wall motor, flat roof motor outside)		
Weight cooker hood / motor casing (kg)	27.5	22.5
Mains voltage (V) / Electrical connection value (W)	230 / 325	230 / 200

Dimensions		
Dimensions (B×D) (mm)	748×426	748×426
Height of the cooker hood (Hmin–Hmax) (mm)	517 (Rear exhaust) / 830–1100 (Top exhaust)	517
Maximum height with shaft extension (mm) optional	1390	
Exhaust opening diameter (mm)	150	
Exhaust position	Top / rear	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	500–750	500–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Touch control	Touch control	Touch control
3 + power function	3 + power function	3 + power function
6	6	6
▪	▪	▪
		▪ (monoblock)
Optional	Optional	Optional
▪	▪	▪
10	10	30
▪	▪	▪

LED (2×2)	LED (2×2)	LED (2×2)
2,700	2,700	2,700

▪		▪
	▪	
30	25 + motor	25
230 / 305	230 / 7 + motor	230 / 200


898×426	898×426	898×426
517 (Rear exhaust) / 830–1100 (Top exhaust)	517 (Rear exhaust) / 830–1100 (Top exhaust)	517
1390	1390	
150	150	
Top / rear	Top / rear	Top
500–750	500–750	500–750
500–750	500–750	500–750
650–750	650–750	650–750

Air quantity and sound level



Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7853, 7851	Integrated motor	800	248 / 327	333 / 492	495 / 550	788 / 577	25 / 35	33 / 43	40 / 51	51 / 62
7856, 7859	Integrated motor	800	126	191	418	478	34 / 45	45 / 55	53 / 64	59 / 70
7833, 7831	Integrated motor	800	245 / 332	348 / 505	500 / 567	780 / 586	25 / 35	32 / 42	41 / 51	51 / 62
7834	Not included	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7836, 7839	Integrated motor	800	124	196	394	490	34 / 45	45 / 55	55 / 66	59 / 70

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

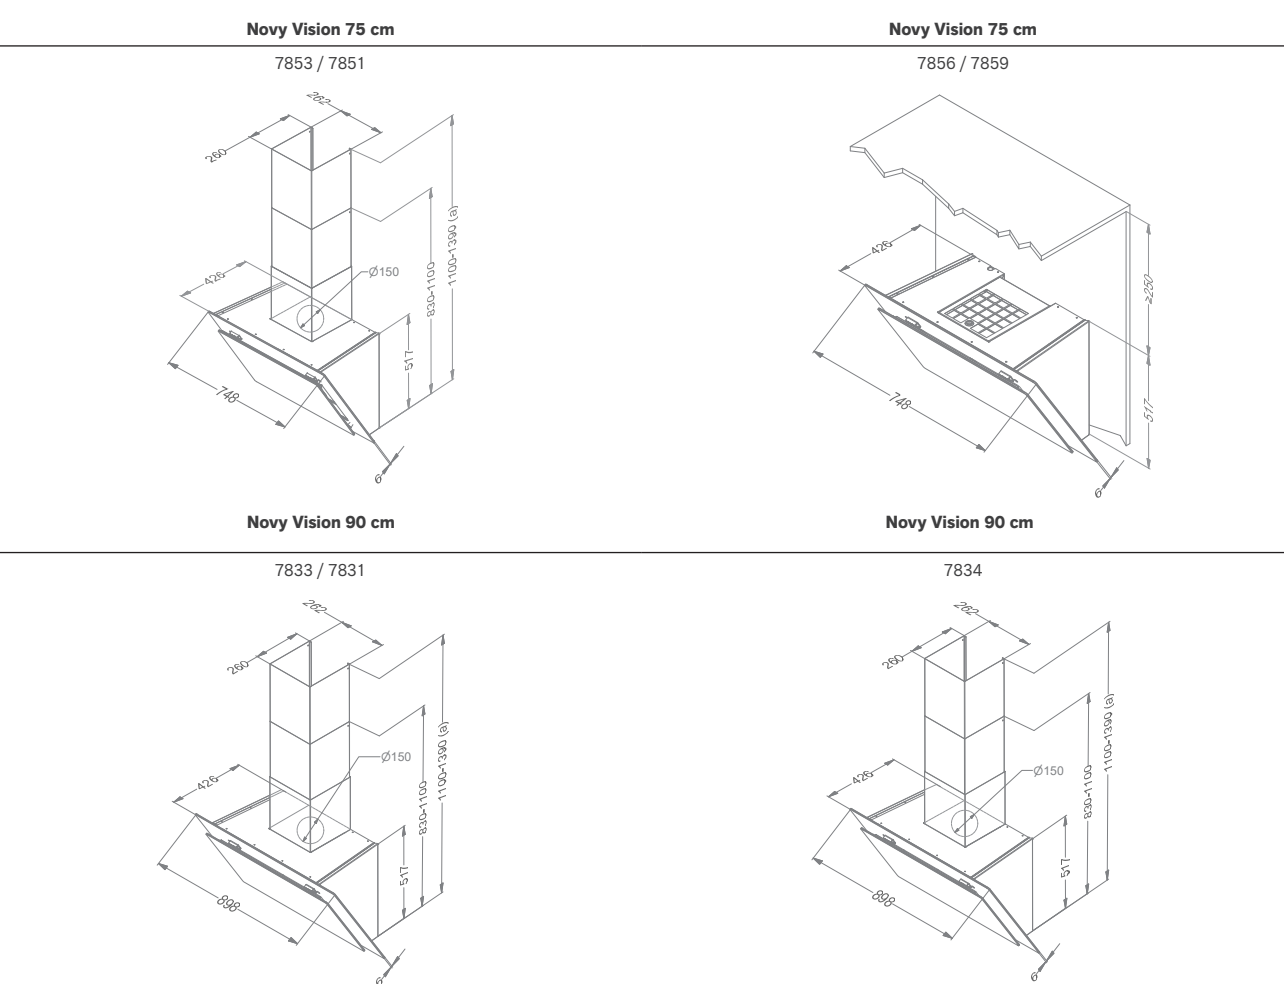

a) With chimney extension
(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.

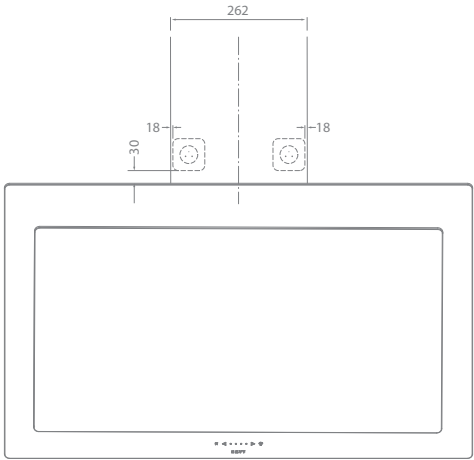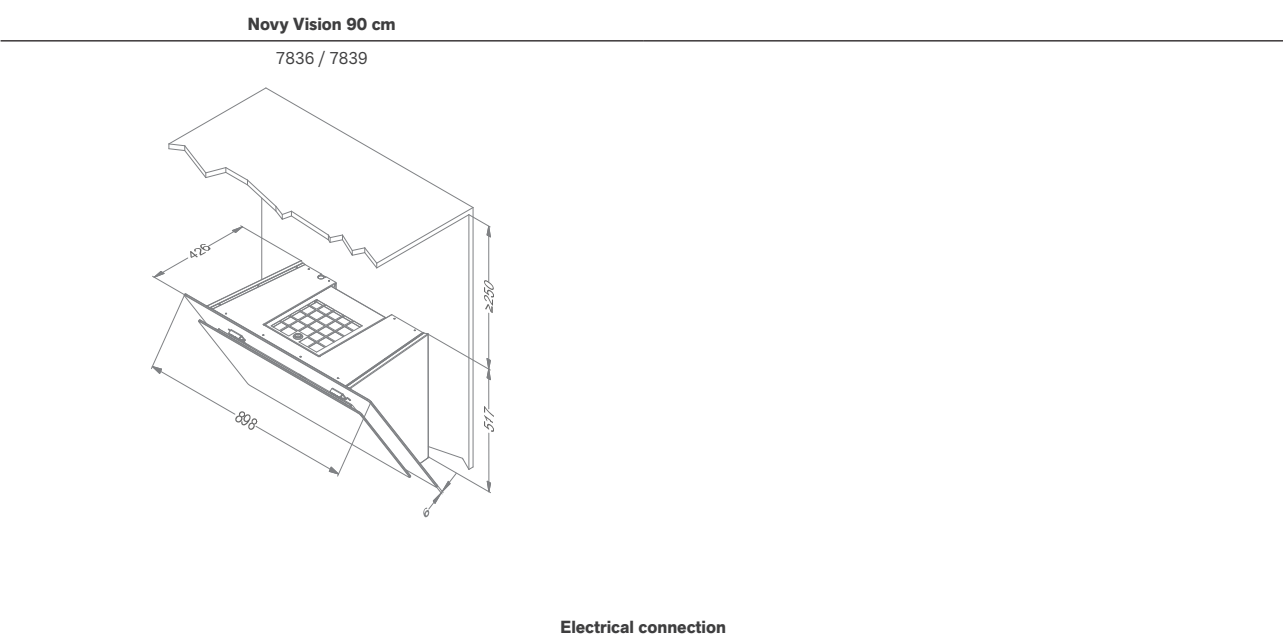

Accessories

	Reference	Price/pc	7851	7853	7859	7856	7831	7833	7834	7839	7836
Motor at a distance											
Remote motor for inside	245.999	£654							▪		
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064							▪		
Roof motor 48.8 cm height	745.999	£1,784							▪		
Roof motor with noise reduction 78.4 cm height	755.999	£2,049							▪		

Accessories

	Reference	Price/pc	7851	7853	7859	7856	7831	7833	7834	7839	7836
Miscellaneous											
Kit with LED lighting (4,000 K)	906.303	£79	▪	▪	▪	▪	▪	▪	▪	▪	▪
Chimney extension stainless steel	7830.100	£329	▪				▪				
Chimney extension black	7833.100	£404		▪				▪	▪		
Grease filter (replacement) (2 pcs to order)	7830.020	£69	▪	▪	▪	▪	▪	▪	▪	▪	▪
Kit for InTouch including an interface (to be mounted before installation of the hood as a replacement for the original interface) and a remote control	990.021	£159	▪	▪	▪	▪	▪	▪	▪	▪	▪
Extension cable for remote motors (5 m)	7000.092	£49							▪		
Recirculation											
Monoblock replacement filter	7400.055	£159			▪	▪				▪	▪





Novy Flatline

- **Slim lines** for sleek design
- **Seamless finish** for elegant appearance
- **Subtle LED light** (2700K) for warm ambiance
- **Reversible chimney** standard for recirculation
- **Easy operation:** Via optional remote control or InTouch
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours





Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



In option




Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	635	35	55	7600	£1,499
	Integrated	Mineral Black	A+	635	35	55	7602	£1,499
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7605	£1,379
120	Integrated	Stainless steel	A+	631	36	55	7610	£1,999
	Integrated	Mineral Black	A+	631	36	55	7612	£1,999
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7615	£1,849

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical specifications

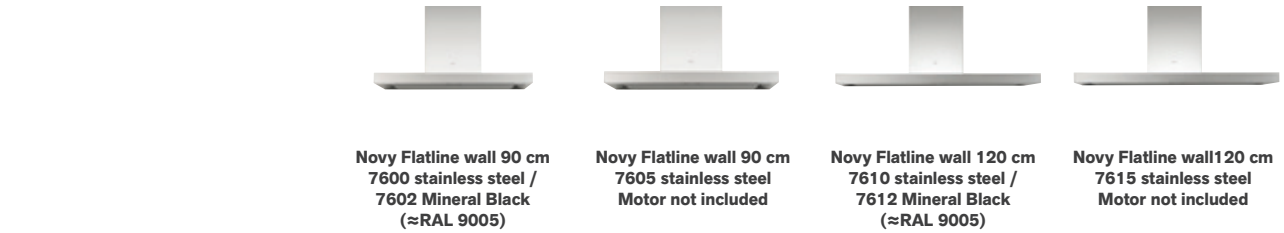

Functions				
Controls	Buttons	Buttons	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6	6	6
With noise reduction	▪	▪	▪	▪
Recirculation	Optional (monoblock)		Optional (monoblock)	
InTouch function for hobs	▪	▪	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪	▪	▪
Run-on timer (min.)	10	10	10	10
Cleaning indicator for grease filter	▪	▪	▪	▪
Replacement indicator for recirculation filter	▪		▪	

Lighting				
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2,700	2,700	2,700	2,700

Technical characteristics				
Colour	7600 stainless steel 7602 Mineral Black (≈RAL 9005)	7605 stainless steel	7610 stainless steel 7612 Mineral Black (≈RAL 9005)	7615 stainless steel
Integrated motor	▪		▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪		▪
Weight cooker hood / motor casing (kg)	30	27 + motor	38.5	35.5 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 12 + motor	230 / 117	230 / 12 + motor


Dimensions				
Dimensions (W×D×H) (mm)	898×554	898×554	1198×554	1198×554
Height of the cooker hood (Hmin–Hmax) (mm)	660–1050	660–1050	660–1050	660–1050
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	730–1120		730–1120	
Maximum height with shaft extension (mm) optional	1410	1410	1410	1410
Maximum height with shaft extension with recirculation (mm) optional	1480		1480	
Exhaust opening diameter (mm)	150	150	150	150
Exhaust position	Top	Top	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV / Power setting	Setting I	Setting II	Setting III	Setting IV / Power setting
7600, 7602	Integrated motor	815	233 / 70	415 / 240	551 / 384	635 / 385	24 / 35	36 / 47	44 / 55	46 / 57
7605	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7610, 7612	Integrated motor	815	259 / 83	420 / 247	550 / 380	631 / 381	26 / 36	38 / 49	44 / 55	48 / 59
7615	Not included		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

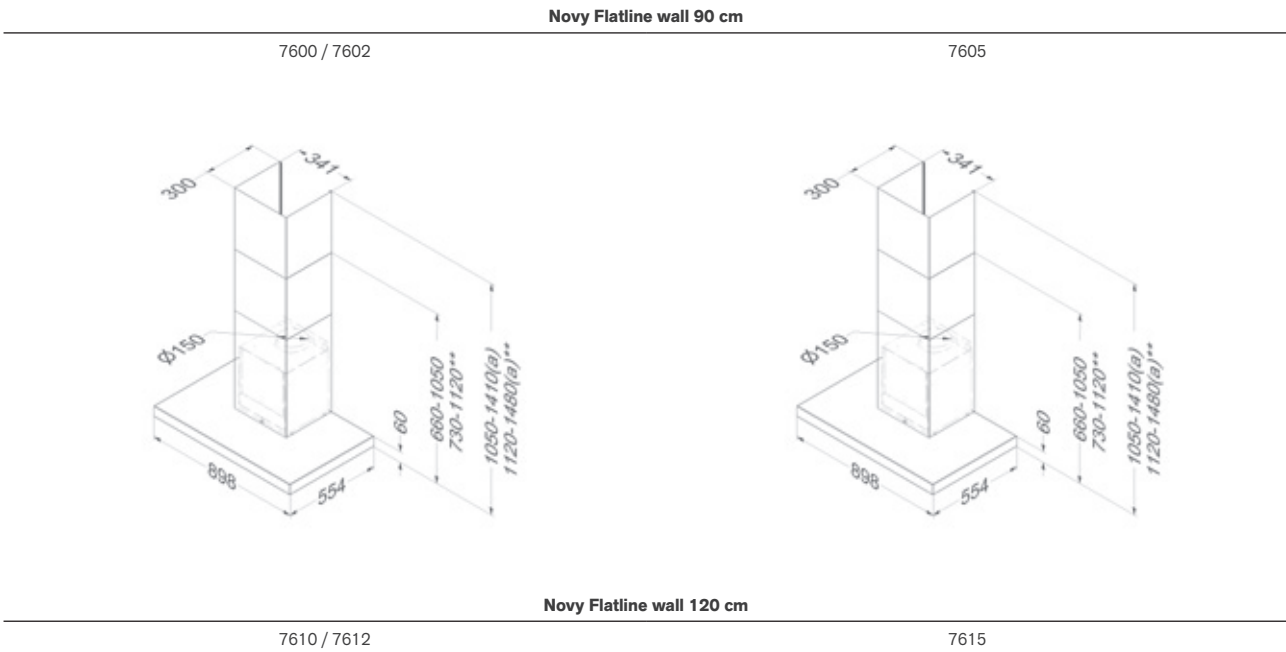

a) With chimney extension - **With recirculation
(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.

Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
Motor at a distance								
Remote motor for inside	245.999	£654			•			•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•			•
Roof motor 48.8 cm height	745.999	£1,784			•			•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•			•
Miscellaneous								
Chimney extension Stainless steel	7600.100	£274	•		•	•		•
Chimney extension Mineral Black	7602.150	£284		•			•	
Grease filter (replacement)	7530.020	£74	•	•	•	•	•	•
Kit with LED lighting (4,000 K)	906.307	£159	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•			•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•

Accessories

	Reference	Price/pc	7600	7602	7605	7610	7612	7615
Recirculation								
Recirculation kit	7600.400	£219	•	•		•	•	
Monoblock replacement filter	7600.060	£159	•	•		•	•	



245.999

245.999

445.999

445.999

745.999

745.999

755.999

755.999

840.029

990.030

990.030

7530.020





Novy Salsa

- **Slim design** for elegant look
- **Easy operation** for optimal user comfort
- **Reversible chimney** standard for recirculation
- **Subtle LED light** (3000K)
- **Optional recirculation** with carbon cartridges





Distance
Maximum distance between cooker hood and hob.



Recirculation
Recirculation is optional.



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
60	Integrated	Stainless steel	A	617	48	58	6500	£1,089
90	Integrated	Stainless steel	A	640	45	57	6510	£1,199

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical specifications

			
Novy Salsa wall 60 cm 6500 stainless steel		Novy Salsa wall 90 cm 6510 stainless steel	

Functions		
Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	5	5
Recirculation	Optional (Carbon cartridge replacement)	Optional (Carbon cartridge replacement)
Run-on timer (min.)	5, 10, 15, 20	5, 10, 15, 20
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Lighting		
Type of lighting (number/W)	LED (2×2)	LED (3×2)
Lighting colour (K)	3,000	3,000

Technical characteristics		
Colour	6500 stainless steel	6510 stainless steel
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	18	20
Mains voltage (V) / Electrical connection value (W)	230 / 210	230 / 241


Dimensions		
Dimensions (B×D) (mm)	598×520	898×520
Height of the cooker hood (Hmin–Hmax) (mm)	710–1140	710–1140
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	765–1205	765–1205
Maximum height with shaft extension (mm) optional	1460	1460
Maximum height with shaft extension with recirculation (mm) optional	1525	1525
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–750	650–750
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–750	600–750
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–750	650–750

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
6500	Integrated motor	700	244 / 403	318 / 468	419 / 512	617 / 549	36 / 48	41 / 53	47 / 58	55 / 67
6510	Integrated motor	700	248 / 413	329 / 466	423 / 505	640 / 544	33 / 45	38 / 51	44 / 57	54 / 66

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

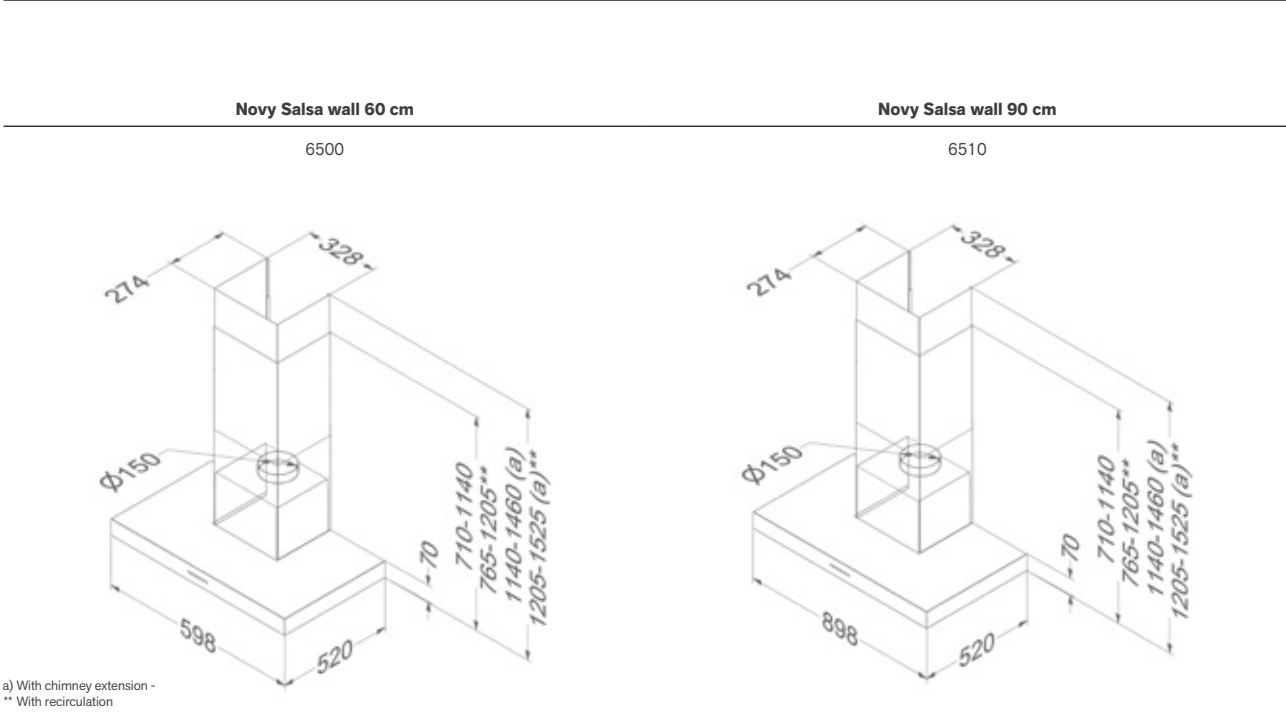

Accessories

	Reference	Price/pc	6500	6510
Motor at a distance				
Chimney extension Stainless steel	6200.100	£284	•	•
Grease filter (replacement)	6200.020	£69	•	
Grease filter (replacement) (2 pcs to order)	6200.020	£69		•
Recirculation				
Recirculation kit	6200.400	£159	•	•
Carbon cartridge replacements (replacement)	6200.055	£79	•	•





Island cooker hoods

Novy Phantom



Novy Pureline Frame



Novy Mood



Novy Flatline



Width				
90 cm				■
100 cm				■
108 cm			■	
120 cm				■
130 cm	■			
Colour				
White			■	
Stainless steel				■
Mineral Black	■	■	■	■
Motor				
Integrated	■	■	■	■
Not included				■
Exhaust				
To the outside				■
Recirculation	■	■	■	Optional

p. 196

p. 202

p. 210

p. 214



Novy Phantom Frame & Novy Phantom Cable

- **Light translucent glass:** a standout feature in any kitchen
- **Subtle frame:** Novy Phantom Frame adds an industrial touch
- **Height-adjustable steel cable:** Novy Phantom Cable creates a sleek floating design
- **Four corner spotlights:** highlight the box-in-box design (2,700 K)
- **Dimmable LED strip:** creates upward ambient lighting (2,700 K)
- **Functional dimmable light:** adjustable from 2,700 K to 4,000 K
- **Smart operation:** via Novy Connect App, InTouch or remote control
- **Flexible placement** thanks to integrated recirculation
- **Recirculation:** Energy-efficient with a durable monoblock filter lasting up to 900 cooking hours.



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Standard with recirculation.



Novy Connect
Operation and settings possible via smartphone or tablet.



	Width (cm)	Motor	Colour	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	maximum		
Phantom Frame	130	Integrated	Mineral Black	501	40	59	7540	£4,039
Phantom Cable	130	Integrated	Mineral Black	501	40	59	7530	£3,534

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Phantom



Technical specifications



Functions		
Controls	Remote control (black) / Novy Connect	Remote control (black) / Novy Connect
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	•	•
Recirculation	• (monoblock)	• (monoblock)
InTouch function for hobs	•	•
Auto-Stop, automatic switch-off after 3 hours	•	•
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	•	•
Replacement indicator for recirculation filter	•	•

Functional lighting		
Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable lighting	•	•
Lighting colour (K)	Default setting 2,700 (adjustable between 2,700 and 4,000)	Default setting 2,700 (adjustable between 2,700 and 4,000)

Mood lighting		
Corner spots: Type of lighting (number/W)	LED (4×2)	LED (4×2)
Led strip: Type of lighting (W)	LED (43)	LED (43)
Dimmable lighting	•	•
Lighting colour (K)	2.700	2.700

Technical characteristics		
Integrated motor	•	•
Weight cooker hood / motor casing (kg)	51	45
Mains voltage (V) / Electrical connection value (W)	230 / 159	230 / 159


Dimensions		
Dimensions (B×D) (mm)	1302×475	1302×475
Height of the cooker hood (glass box) (mm)	332	332
Minimum total height of the cooker hood (mm)	582	582
Maximum total height of the cooker hood (mm)	1,650	1,850
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7540, 7530	Integrated motor	815	142	280	393	501	27 / 40	41 / 53	46 / 59	50 / 63

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61 591.

Technical drawings

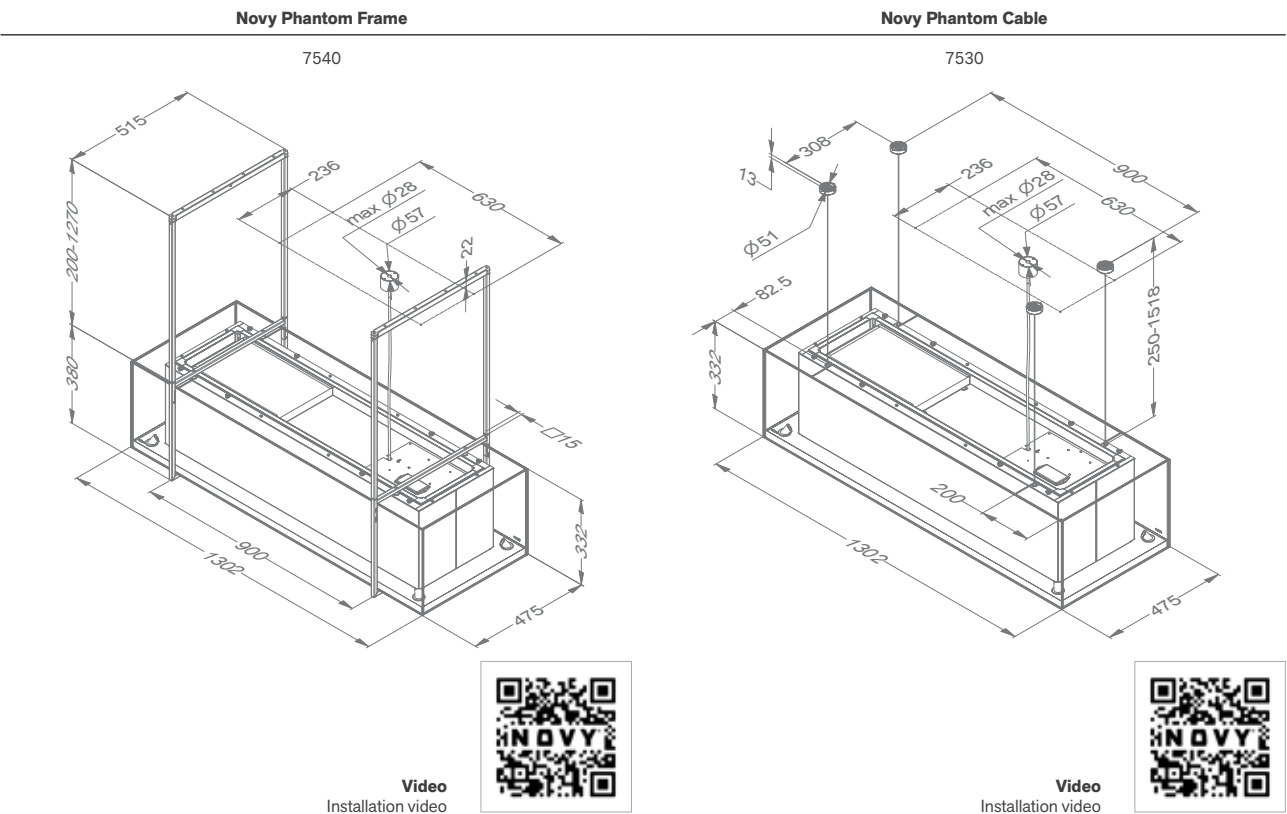



Accessories

	Reference	Price/pc	7540	7530
Miscellaneous				
Grease filter (replacement)	7530.020	£74	▪	▪
Kit of longer suspension cables (4 × 3.5 m)	7530.100	£119		▪
Ceiling plate Mineral Black	7530.500	£249		▪
Remote control (white)	840.029	£104	▪	▪
Recirculation				
Monoblock replacement filter	7300.055	£169	▪	▪





NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Pureline Frame / Island cooker hoods



202 – 203

Novy Pureline Frame

- **Modular setup:** Width and layout adjustable to preference
- **Panels not included:** Supplied by professional kitchen fitter
- **Black steel frame** for industrial touch
- **Dimmable LED lighting:** Warm (2700K) to neutral white (4000K)
- **Optimal efficiency** even for wide cooktops
- **Recirculation:** Monoblock filter lasts up to 900 cooking hours



Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Standard with recirculation.



Width (cm) cooker hood	Motor	Colour	Frame (number)	Frame height (cm)	Lighting kits (number)	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc.
							Minimum	maximum		
90	Integrated	Mineral Black	2	70	-	520	39	59	15001	£3,534
	Integrated	Mineral Black	3	70	1	520	39	59	15003	£3,834
	Integrated	Mineral Black	4	70	2	520	39	59	15005	£4,644
	Integrated	Mineral Black	2	80	-	520	39	59	15007	£3,534
	Integrated	Mineral Black	3	80	1	520	39	59	15009	£3,834
	Integrated	Mineral Black	4	80	2	520	39	59	15011	£4,644
120	Integrated	Mineral Black	2	70	-	520	39	59	15002	£4,039
	Integrated	Mineral Black	3	70	1	520	39	59	15004	£4,139
	Integrated	Mineral Black	4	70	2	520	39	59	15006	£4,949
	Integrated	Mineral Black	2	80	-	520	39	59	15008	£4,039
	Integrated	Mineral Black	3	80	1	520	39	59	15010	£4,139
	Integrated	Mineral Black	4	80	2	520	39	59	15012	£4,949

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Pureline Frame



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOODS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOODS



GAS HOODS




DESIGNER
LIGHTING




INFO

Technical specifications

		
	Cooker hood 90 cm 15001 frame height 70 cm / 15007 frame height 80 cm	Cooker hood 120 cm 15002 frame height 70 cm / 15008 frame height 80 cm
Funcities		
Controls	Buttons + Remote control (black)	Buttons + Remote control (black)
Number of speed settings	3 + powerfunction	3 + powerfunction
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	▪ (Monoblock)	▪ (Monoblock)
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	30	30
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	▪
Lighting cooker hood		
Type of lighting (number/W)	LED (4×2) / dimmable	LED (4×2) / dimmable
Lighting colour (K)	2.700 or 4.000	2.700 or 4.000
Lighting shelf		
Type of lighting (number/W)		
Lighting colour (K)		
Operation		
Technical characteristics		
Number of frames	2	2
Colour	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)
Integrated motor	▪	▪
Ceiling cap electrical connection	▪	▪
Power cord length (mm)	180	180
Weight excl. shelf* (kg)	53	57
Mains voltage (V) / Electrical connection value (W)	230 / 117	230 / 117
Dimensions		
Dimensions cooker hood (W×D×H) (mm)	868×508	1168×508
Opening lower shelf (W×D) (mm)	845×485	1145×485
Dimensions housing cooker hood (W×D×H) (mm)	872×556×330	1172×556×330
Exhaust opening top shelf (W×D) (mm)	401×248	401×248
Exhaust position	Top	Top
Dimensions frame		
Dimensions (W×D) (mm)	25×806	25×806
Dimensions (H) (mm)	700 or 800	700 or 800
Depth of shelf material (mm)*	750	750
Thickness of shelf material (mm)*	18-25	18-25
Installation height		
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	650–850	650–850
Installation height with gas hob (Hmin–Hmax) (mm)	650–850	650–850

* Provide the shelf yourself, taking into account sufficient bearing capacity and the correct thickness.


			
Cooker hood 90 cm 15003 frame height 70 cm / 15009 frame height 80 cm	Cooker hood 120 cm 15004 frame height 70 cm / 15010 frame height 80 cm	Cooker hood 90 cm 15005 frame height 70 cm / 15011 frame height 80 cm	Cooker hood 120 cm 15006 frame height 70 cm / 15012 frame height 80 cm
Buttons + Remote control (black)	Buttons + Remote control (black)	Buttons + Remote control (black)	Buttons + Remote control (black)
3 + powerfunction	3 + powerfunction	3 + powerfunction	3 + powerfunction
6	6	6	6
▪	▪	▪	▪
▪ (Monoblock)	▪ (Monoblock)	▪ (Monoblock)	▪ (Monoblock)
▪	▪	▪	▪
▪	▪	▪	▪
30	30	30	30
▪	▪	▪	▪
▪	▪	▪	▪
LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable	LED (4×2) / dimmable
2.700 or 4.000	2.700 or 4.000	2.700 or 4.000	2.700 or 4.000
LED (3×2) / dimmable	LED (3×2) / dimmable	LED (6×2) / dimmable	LED (6×2) / dimmable
2.700 or 4.000	2.700 or 4.000	2.700 or 4.000	2.700 or 4.000
Simultaneously with cooker hood	Simultaneously with cooker hood	Simultaneously with cooker hood	Simultaneously with cooker hood
3	3	4	4
Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)	Mineral Black (≈RAL 9005)
▪	▪	▪	▪
▪	▪	▪	▪
180	180	180	180
61	66	69	74
230 / 123	230 / 123	230 / 129	230 / 129
868×508	1168×508	868×508	1168×508
845×485	1145×485	845×485	1145×485
872×556×330	1172×556×330	872×556×330	1172×556×330
401×248	401×248	401×248	401×248
Top	Top	Top	Top
25×806	25×806	25×806	25×806
700 or 800	700 or 800	700 or 800	700 or 800
750	750	750	750
18-25	18-25	18-25	18-25
650–850	650–850	650–850	600–850
650–850	650–850	650–850	600–850
650–850	650–850	650–850	600–850

Air quantity and sound level

		Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
Type			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
15001, 15003, 15005, 15007, 15009, 15011	90 cm cooker hood	815	251	363	423	497	35 / 47	43 / 55	46 / 58	49 / 61
15002, 15004, 15006, 15008, 15010, 15012	120 cm cooker hood	815	252	379	445	508	35 / 47	42 / 54	45 / 58	48 / 61

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

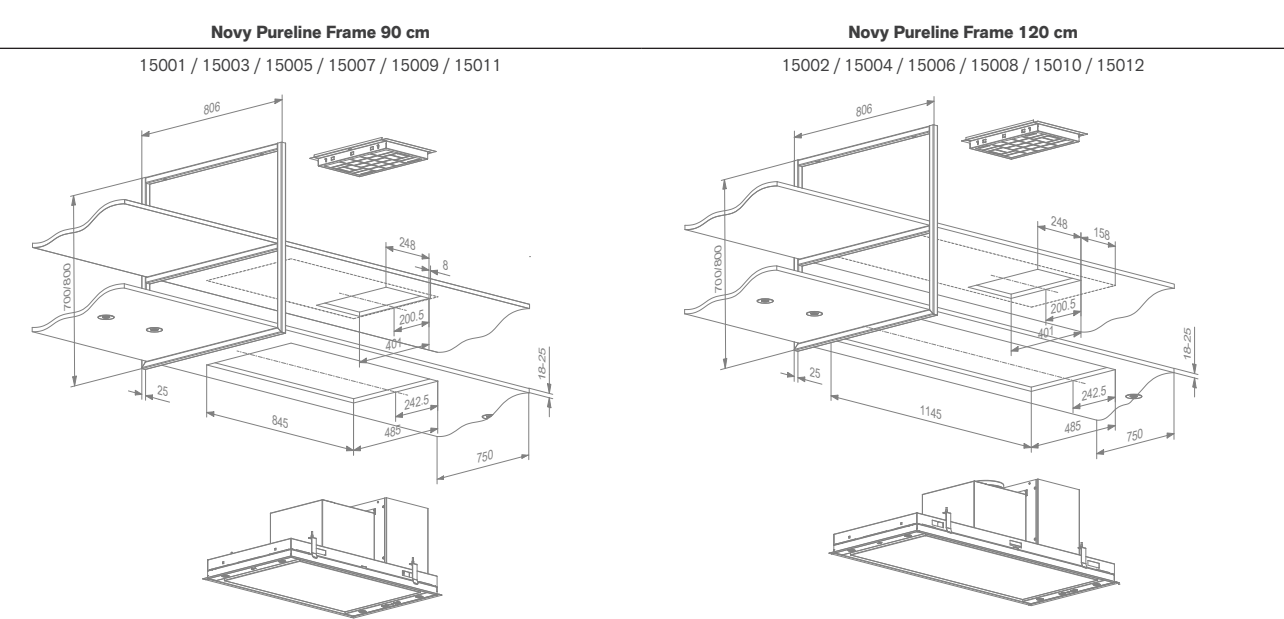

Accessories

	Reference	Price/pc	15001 15003 15005 15007 15009 15011	15002 15004 15006 15008 15010 15012
Miscellaneous				
Grease filter (replacement) (2 pcs to order)	6830.020	£69	•	•
Monoblock replacement filter	7300.055	£169	•	•
Remote control (white)	840.029	£104	•	•


6830.020

7300.055


840.029

Video
Installation video

In detail

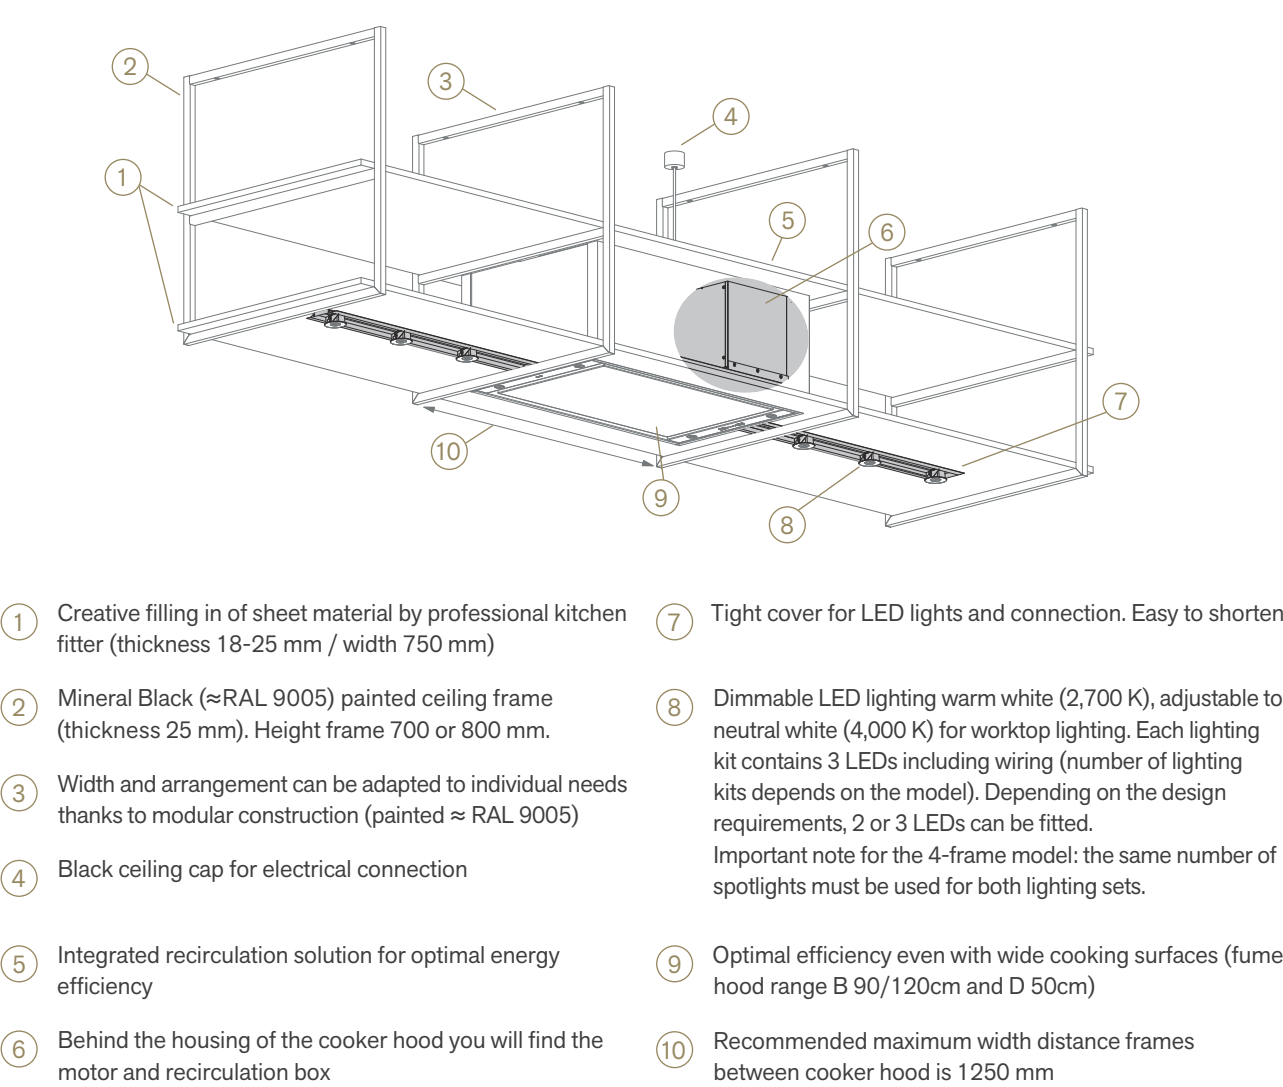

Customise your Novy Pureline Frame

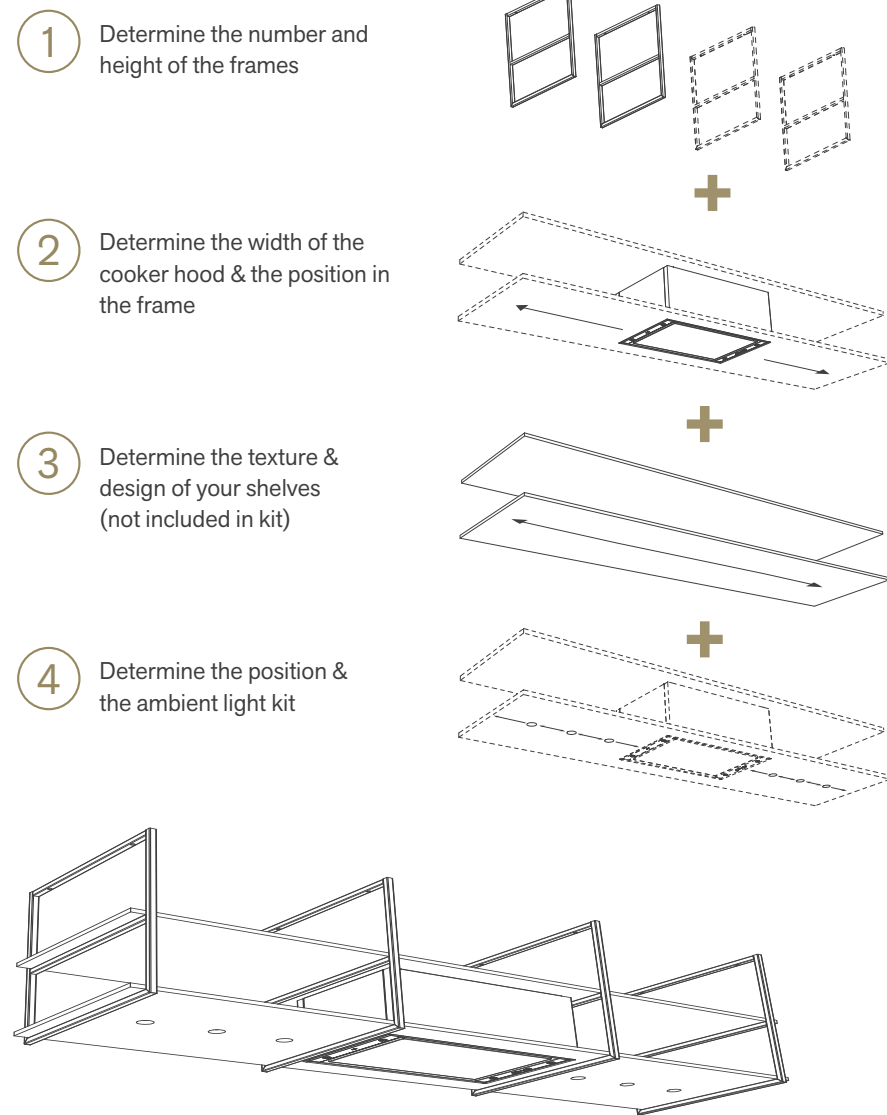

Video
Customise your
Novy Pureline Frame





NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Mood

- **Two-in-one:** cooker hood with light fixture
- **Adjustable light** from 2700K to 5000K
- **Extended lighting function** with cooking and mood modes
- **Easy operation:** Remote or Novy Connect App
- **Flexible placement** thanks to integrated recirculation
- **Recirculation:** Monoblock filter lasts up to 900 cooking hours

Novy Mood / Island cooker hoods 210–211



Distance
Maximum distance
between cooker hood
and hob.



InTouch
Standard with function
for controlling the cooker
hood from the hob.



Recirculation
Standard with recirculation.



Novy Connect
Operation and settings
possible via smartphone
or tablet.



Width (cm)	Motor	Colour	Flow setting 4 (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
				Minimum	maximum		
108	Integrated	White	661	53	69	7550	£3,014
	Integrated	Mineral Black	661	53	69	7552	£3,014

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Video
Novy Mood



Technical specifications



Functions	
Controls	Remote control (black) / Novy Connect
Number of speed settings	4
With noise reduction	•
Recirculation	• (monoblock)
InTouch function for hobs	•
Auto-Stop, automatic switch-off after 3 hours	•
Run-on timer (min.)	30
Cleaning indicator for grease filter	•
Replacement indicator for recirculation filter	•

Lighting	
Type of lighting (W)	LED (32) / dimmable
Lighting colour cooking mode (K)	Default setting 4,000 (adjustable between 2,700 and 5,000)
Lighting colour mode mode (K)	Default setting 2,700 (adjustable between 2,700 and 5,000)

Technical characteristics	
Colour	7550 white (≈RAL 9003) / 7552 Mineral Black (≈RAL 9005)
Integrated motor	•
Weight cooker hood / motor casing (kg)	32
Mains voltage (V) / Electrical connection value (W)	230 / 196


Dimensions	
Dimensions (B×D) (mm)	1080×246
Height of the Cooker hood (mm)	370
Minimum total height of the cooker hood (mm)	620
Maximum total height of the cooker hood (mm)	1,870
Exhaust position	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850

Air quantity and sound level

Type		Maximum free flow rate (m³/h)	Air quantity (m³/h)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Setting IV	Setting I	Setting II	Setting III	Setting IV
7550, 7552	Integrated motor	1010	324	432	534	661	41 / 53	47 / 59	52 / 64	57 / 69

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

Technical drawings

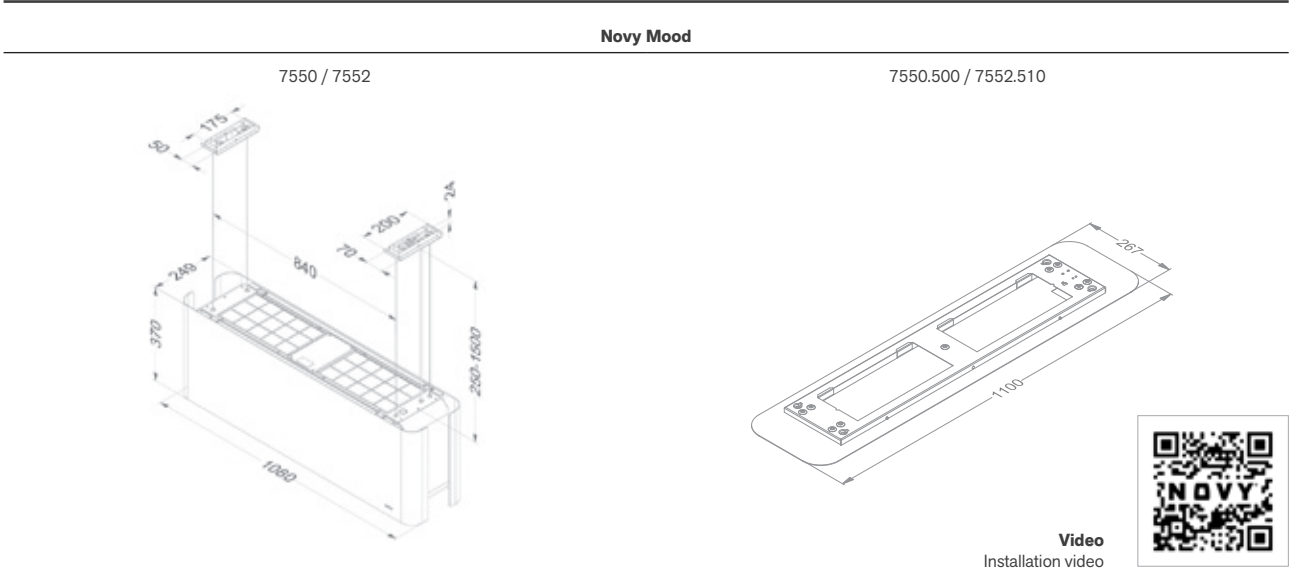

Accessories

	Reference	Price/pc	7550	7552
Miscellaneous				
Grease filter (replacement) (4 pcs to order)	7550.030	£79	•	•
Kit with longer hanging cables (4×3,5 m)	7550.100	£124	•	•
Mounting set Mineral Black	7552.310	£124		•
Ceiling plate white	7550.500	£124	•	
Ceiling plate Mineral Black	7552.510	£124		•
Remote control (white)	840.029	£104	•	•
Recirculation				
Monoblock replacement filter (set contains 2 pcs)	7550.400	£339	•	•





Novy Flatline

- **Slim profile** for sleek island design
- **Seamless finish** for elegant appearance
- **Quiet and effective** due to perimeter extraction
- **Subtle LED light** (2700K) for warm ambiance
- **Reversible chimney** standard for recirculation
- **Easy operation:** Via optional remote control or InTouch
- **Optional recirculation:** Monoblock recirculation filter lasts up to 900 cooking hours





Distance
Maximum distance between cooker hood and hob.



InTouch
Standard with function for controlling the cooker hood from the hob.



Recirculation
Recirculation is optional.



In option



Width (cm)	Motor	Colour	EEI	Flow power function (m³/h)	Sound level during normal use in dB(A) (re 1 pW)		Ref.	Price/pc
					Minimum	Maximum		
90	Integrated	Stainless steel	A+	707	35	53	7640	£2,614
	Integrated	Mineral Black	A+	707	35	53	7642	£2,769
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7645	£2,334
100	Integrated	Stainless steel	A	743	47	57	7650	£2,724
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7655	£2,499
120	Integrated	Stainless steel	A	744	47	57	7660	£2,959
	Not included ⁽¹⁾	Stainless steel		⁽¹⁾	⁽¹⁾	⁽¹⁾	7665	£2,739

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.

(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories). The air volume/noise level depends on the type of motor and installation.

Technical specifications



Novy Flatline island 90 cm
7640 stainless steel /
7642 Mineral Black (≈RAL 9005)

Novy Flatline island 90 cm
7645 stainless steel
motor not included

Functions		
Controls	Buttons	Buttons
Number of speed settings	3 + power function	3 + power function
Power setting with automatic downshift (min.)	6	6
With noise reduction	▪	▪
Recirculation	Optional (monoblock)	
InTouch function for hobs	▪	▪
Auto-Stop, automatic switch-off after 3 hours	▪	▪
Run-on timer (min.)	10	10
Cleaning indicator for grease filter	▪	▪
Replacement indicator for recirculation filter	▪	

Lighting		
Type of lighting (number/W)	LED (4×2)	LED (4×2)
Dimmable Lighting	▪	▪
Lighting colour (K)	2,700	2,700

Technical characteristics		
Colour	7640 stainless steel 7642 Mineral Black (≈RAL 9005)	stainless steel
Integrated motor	▪	
Motor not included (suitable for wall motor, flat roof motor outside)		▪
Weight cooker hood / motor casing (kg)	36	33 + motor
Mains voltage (V) / Electrical connection value (W)	230 / 118	230 / 13 + motor

Dimensions (mm)		
Dimensions (B×D)	900×600	900×600
Height of the cooker hood (Hmin–Hmax) (mm)	563–730	563–730
Height of the cooker hood with recirculation (Hmin–Hmax) (mm)	679–860	
Maximum height with chimney extension Optional A/B	1040 / 1350	1040 / 1350
Maximum height with chimney extension for recirculation Optional A/B	1170 / 1480	
Exhaust opening diameter (mm)	150	150
Exhaust position	Top	Top
Recommended installation height with an induction cooker (Hmin–Hmax) (mm)	650–850	650–850
Recommended installation height with an electric or ceramic cooker (Hmin–Hmax) (mm)	600–850	600–850
Recommended installation height with a gas cooker (Hmin–Hmax) (mm)	650–850	650–850



Novy Flatline island 100 cm
7650 stainless steel

Novy Flatline island 100 cm
7655 stainless steel
motor not included

Novy Flatline island 120 cm
7660 stainless steel

Novy Flatline island 120 cm
7665 stainless steel
motor not included

Buttons	Buttons	Buttons	Buttons
3 + power function	3 + power function	3 + power function	3 + power function
6	6	6	6
▪	▪	▪	▪
Optional (monoblock)		Optional (monoblock)	
▪	▪	▪	▪
▪	▪	▪	▪
10	10	10	10
▪	▪	▪	▪
▪		▪	

LED (4×2)	LED (4×2)	LED (4×2)	LED (4×2)
▪	▪	▪	▪
2,700	2,700	2,700	2,700

stainless steel	stainless steel	stainless steel	stainless steel
▪		▪	
	▪		▪
38	35 + motor	42	39 + motor
230 / 308	230 / 13 + motor	230 / 300	230 / 13 + motor

1000×700	1000×700	1200×700	1200×700
563–730	563–730	563–730	563–730
679–860		679–860	
1040 / 1350	1040 / 1350	1040 / 1350	1040 / 1350
1170 / 1480		1170 / 1480	
150	150	150	150
Top	Top	Top	Top
650–850	650–850	650–850	650–850
600–850	600–850	600–850	600–850
650–850	650–850	650–850	650–850

Air quantity and sound level


Type		Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
			Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
7640, 7642	Integrated	815	277 / 66	467 / 237	620 / 382	707 / 382	24 / 35	34 / 46	41 / 53	44 / 56
7645	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7650	Integrated	1000	216 / 314	296 / 472	451 / 531	743 / 555	32 / 47	35 / 50	41 / 57	50 / 64
7655	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
7660	Integrated	1000	219 / 324	302 / 470	459 / 496	744 / 511	32 / 47	36 / 51	41 / 57	51 / 65
7665	Not included ⁽¹⁾		(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)

Noise levels measured in accordance with IEC 60704-2-13 standards, flow rates according to IEC 61591.



(1) This model should be connected to an internal motor type 245.999, a wall motor type 445.999 or roof motor type 745.999 of 755.999 (see accessories).
The air volume/noise level depends on the type of motor and installation.

Technical drawings

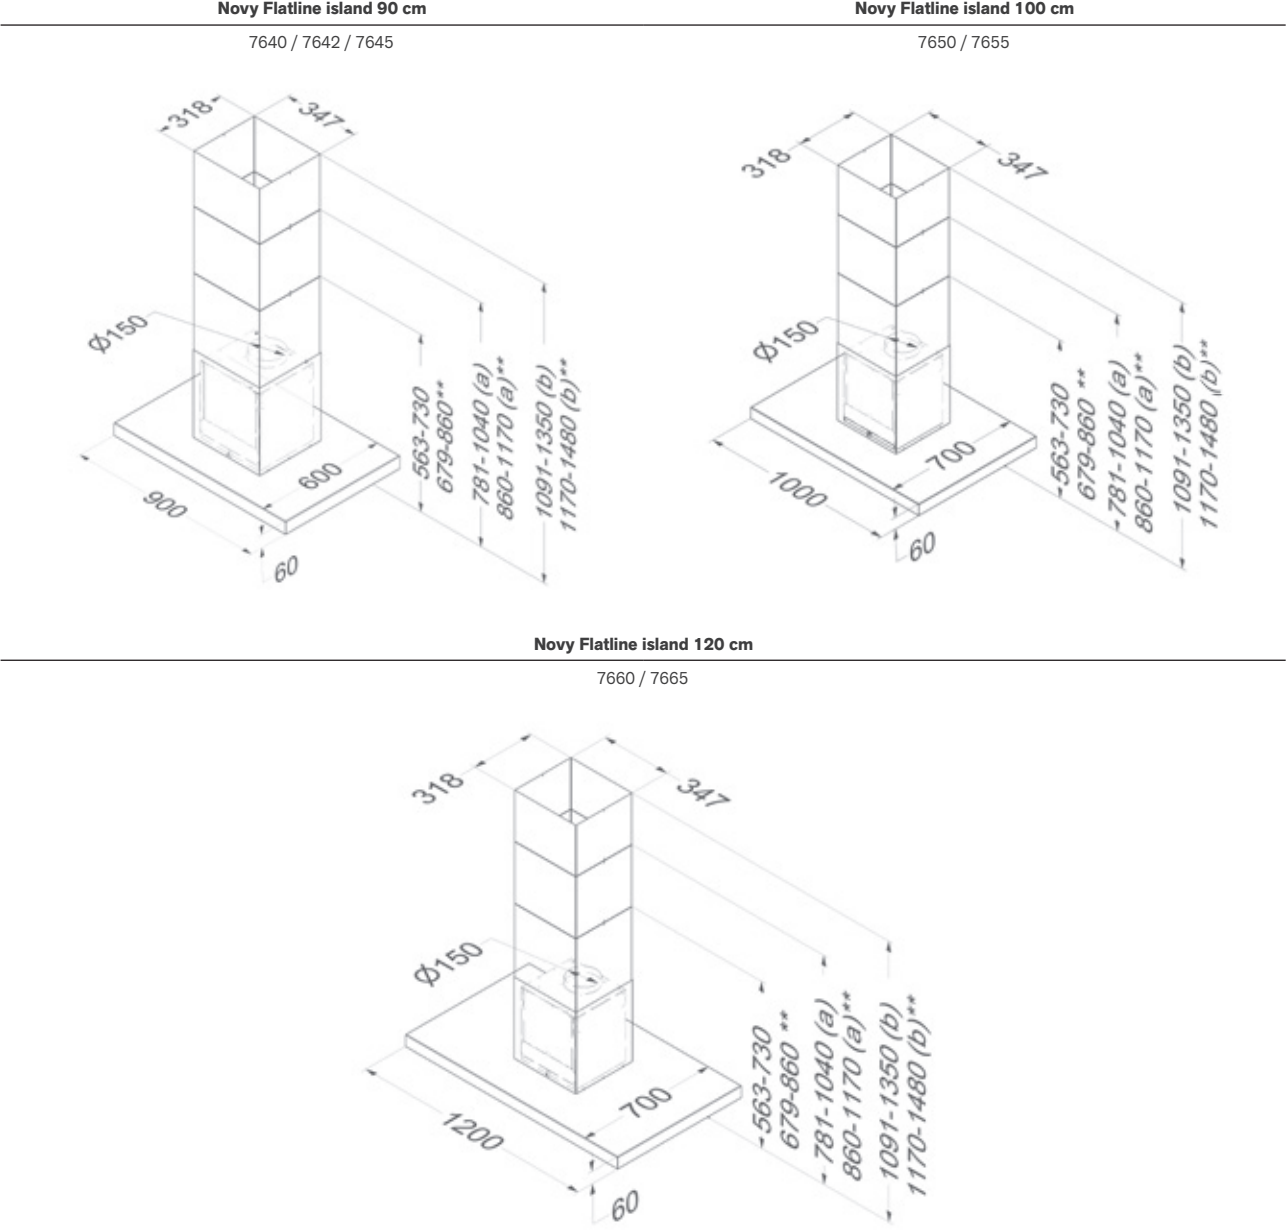

(a) With chimney extension - (b) With chimney extension (higher) - **With recirculation


Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
Motor at a distance									
Remote motor for inside	245.999	£654			•		•		•
Wall motor, minimum 5 m between cooker hood and motor	445.999	£1,064			•		•		•
Roof motor 48.8 cm height	745.999	£1,784			•		•		•
Roof motor with noise reduction 78.4 cm height	755.999	£2,049			•		•		•
Miscellaneous									
Chimney extension stainless steel option A	7640.120	£484	•		•	•	•	•	•
Chimney extension stainless steel option B	7640.130	£639	•		•	•	•	•	•
Chimney extension Mineral Black option A	7642.120	£484		•					
Chimney extension Mineral Black option B	7642.130	£639		•					
Grease filter (replacement)	7530.020	£74	•	•	•	•	•	•	•
Kit with LED lighting (4,000 K)	906.307	£159	•	•	•	•	•	•	•
Remote control (white)	840.029	£104	•	•	•	•	•	•	•
Remote control (black)	840.049	£104	•	•	•	•	•	•	•
Extension cable for remote motors (5 m)	7000.092	£49			•		•		•
Kit connection with external cover and/or lighting	990.030	£169	•	•	•	•	•	•	•

245.999




245.999




445.999




445.999



745.999




745.999



755.999



755.999



7530.020




840.029



990.030




990.030



Accessories

	Reference	Price/pc	7640	7642	7645	7650	7655	7660	7665
Recirculation									
Recirculation kit	7640.400	£309	•	•		•		•	
Monoblock replacement filter	7600.060	£159	•	•		•		•	

7640.400



7600.060



Cooker hood accessories

Recirculation	p. 224
Motors	p. 228
Maintenance	p. 230
Installation accessories	p. 232

Accessories can be found per product on the relevant product page.

Recirculation

By opting for recirculation you no longer need to vent warm air to the outside, which saves you energy. In addition, a cooker hood with recirculation offers more freedom with regard to its position in comparison to a cooker hood with an exhaust to the outside. This technology is based on an upgraded monoblock carbon filter that provides an extraordinary level of cooking odour absorption.

Installation methods

Novy built-in box with monoblock filter for ceiling units, downdrafts and canopy

The Novy built-in box with monoblock filter must be built into an existing structure, cabinet or plinth, and is connected to the cooker hood. The odours of the extracted cooking vapours are filtered out by the monoblock filter in the box. It also reduces the noise more. The air is then returned to the kitchen through the exhaust grill of the box. This excellent efficiency is due to the elegant design of the box, in which small hexagonal holes ensure a greater air flow. Visually, the smooth surface results in a subtle integration into the plinth.

Basic kits to integrate in ceiling units and canopies

For ceiling units and canopies a kit can be ordered when opting for recirculation. The basic kit consists of a monoblock filter. This is placed directly behind the grease filter. For the Novy Fusion Pro, Fusion, Telescopic and Telescopic Essence a tailored design exhaust grill for upper cabinets (906.450) is available to optimise the return of filtered air into the kitchen. Minimum space required between the upper cabinet and the ceiling: 20 cm
An exhaust grill for ceiling units and other canopies is necessary to return filtered air into the kitchen.

Basic kits for wall and island cooker hoods

A basic kit is necessary when choosing recirculation for wall and island cooker hoods. This basic kit with monoblock filter is integrated in the chimney of the cooker hood. It also reduces the noise more. The air is then returned to the kitchen through the outlets in the cooker hood chimney.

Cooker hoods with recirculation as standard

Some cooker hoods are equipped with recirculation and a monoblock filter as standard.

Replaceable carbon filter cartridges

Salsa and Essence cooker hoods use replaceable carbon filter cartridges. In due course the cartridges must be replaced. The kit consists of a cartridge filled with active carbon granules. The exhaust grill must be provided by the customer in the canopy, decorative chimney or cabinet (except in the case of Salsa).

Maintenance

Replacement monoblock filter or active carbon filter cassettes

After 3 to 5 years (depending the models and on the intensity of cooking) the monoblock filter needs to be replaced. All cooker hoods have a cleaning indicator which, in the case of a monoblock filter, lights up after 900 hours of cooking (depending on the models). In the case of cooker hoods with active carbon filter cartridges, the indicator lights up after 120 hours and the cassette must be replaced.

Novy offers a wide range of accessories that make it possible to adapt a cooker hood to your specific situation. In this way it will be a great pleasure to use your cooker hood.



Recirculationboxes

Technical specifications





Technical characteristics		
Combine with	Ceiling units and canopy	Ceiling units and canopy
To be mounted in	Wall / ceiling / cabinet	Wall / ceiling / cabinet
Type	Recirculationbox	Recirculationbox
Grid colour	841.400 white (≈RAL 9003) 842.400 Mineral Black (≈RAL 9005) 843.400 grey (≈RAL 7030)	7931.400 white (≈RAL 9003) 7932.400 Mineral Black (≈RAL 9005) 7933.400 grey (≈RAL 7030)
Including monoblock filter(s)	•	•
Number of monoblock filters	1	2

Accessories included

Dimensions (mm)		
Dimensions (W×D×H) (mm)	500 × 295 × 270	820 × 292 × 140
Opening (W×H) (mm)	487 × 255	805 × 123
Maximum plinth height		
Dimensions inlet (mm)	Ø150	89 x 222 / Ø150
Position inlet	Rear corner / top corner / side corner Recirculationbox 180° rotatable	Rear corner / side (89 x 222) / top (Ø150) Recirculationbox 180° rotatable

Accessories		
Monoblock replacement filter for recirculationbox	830.055 £169	7900.055 (2 pcs to order) £159

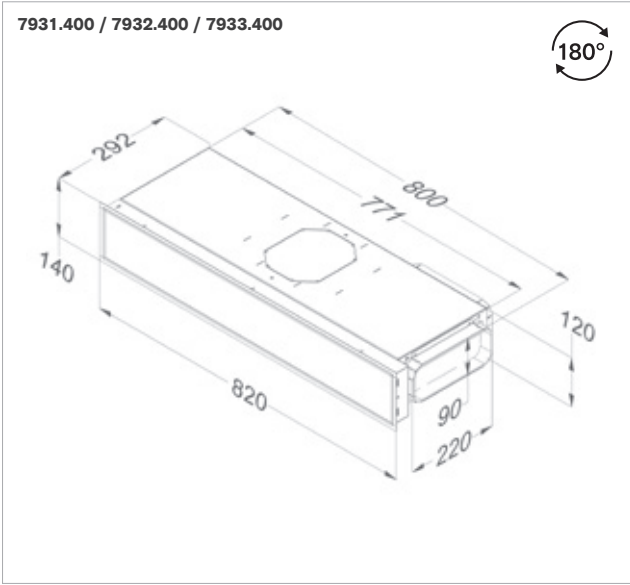
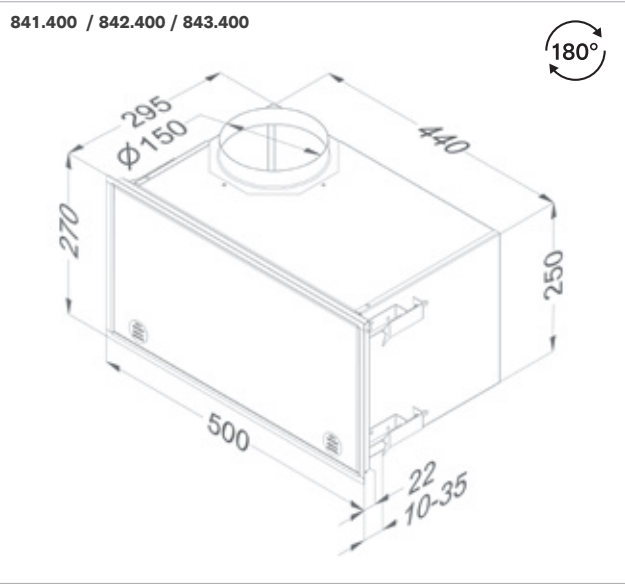


Downdraft	Downdraft	Downdraft (Novy Panorama 120)
Plinth	Plinth	Plinth
Recirculationbox	Recirculation kit + accessories	Recirculationbox
7921.400 white (≈RAL 9003) 7922.400 Mineral Black (≈RAL 9005) 7923.400 grey (≈RAL 7030)	1811.821 white (≈RAL 9003) 1811.822 Mineral Black (≈RAL 9005) 1811.823 grey (≈RAL 7030)	7941.400 white (≈RAL 9003) 7942.400 Mineral Black (≈RAL 9005) 7943.400 grey (≈RAL 7030)
•	•	•
2	2	3

1x 906.401 Flat duct 1000 mm
2x 906.402 Connector
1x 906.404 Vertical bend 90° with
air deflectors

818 × 289 × 98	818 × 289 × 98	1118 × 289 × 98
805 × 100	805 × 100	1105 × 100
100	100	100
89 x 222	89 x 222	89 x 222 (2×)
Rear centre / rear corner / side Recirculationbox 180° rotatable	Rear centre / rear corner / side Recirculationbox 180° rotatable	Behind (2×)

7910.055 (2 pcs to order) £159	7910.055 (2 pcs to order) £159	98.001 (set) £469
-----------------------------------	-----------------------------------	----------------------

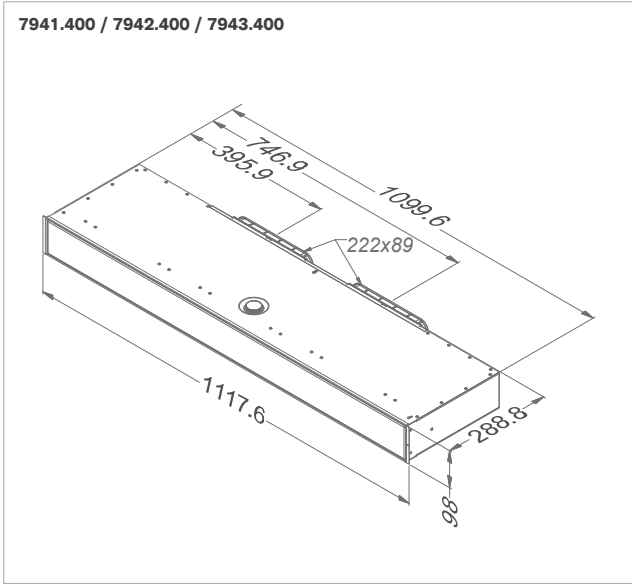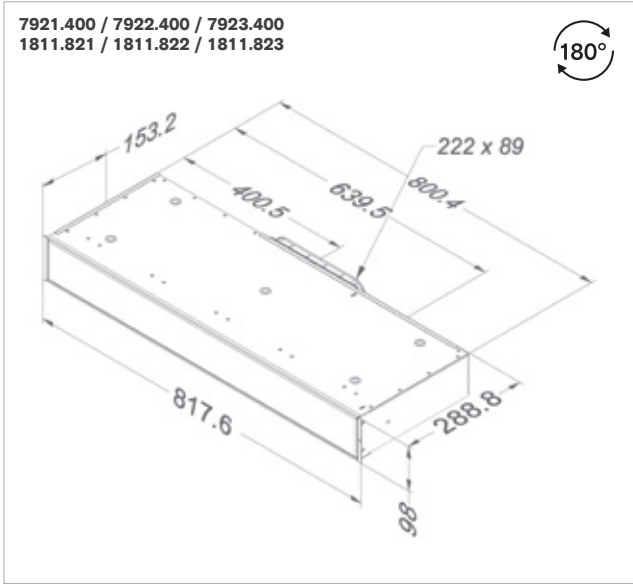

Motors

Remote motors

For models without an integrated motor, you have the option of a remote motor. The choice is between installation indoors and various motors for outside installation. This enables you to install a cooker hood in a suspended ceiling with limited height and create absolute silence in the kitchen. When installing a remote motor the sound level depends on the type of motor and installation. If the Novy cooker hood is installed without a Novy motor (or the motor without a Novy cooker hood) the warranty becomes void.

The cooker hood contains as standard a connection cable of approx. 4 m (depending on the model). A 5 m extension cable is optionally available if the distance between the cooker hood and the motor is greater.

Kit to install remote motors inside

For the models Novy Pureline Pro, Pureline and Mini Pureline the motor can be easily installed remotely inside with an additional installation kit.

This installation kit contains a 5 m connecting cable as standard.

An optional 5 m extension cable is available if the distance between the cooker hood and the motor is greater.

Technical specifications

Functions
Controls
Number of speed settings
With noise reduction (integrated)
With insulated flat roof uprising
With insulated flat roof uprising and silencer
With automatic return cover
With silencer, connecting piece, wall conduct and aluminium tape
With insulated switch
Minimum/ maximum operating temperature (°C)
Material
Material flat roof motor : aluminium (ALMG3)
Material flat roof motor : aluminium (ALMG3)
Material non-return valve : galvanised
Technical characteristics
Weight cooker hood / motor casing (kg)
Mains voltage (V) / Electrical connection value (W)
Dimensions
Dimensions motorunit (B×D×H) (mm)
Exhaust opening diameter (mm)
Exhaust position
Diameter inlet (tube) (mm)
Diameter inlet (opening roof) (mm)



Remote motor for installation inside
245.999 Black
£654



Wall mmotor
445.999 Stainless steel
£1,064







Flat roof motor 48,8 cm
745.999
£1,784



Flat roof motor 78,4 cm
755.999
With noise reduction
£2,049

In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood	In combination with the cooker hood
3 + power function	3 + power function	3 + power function	3 + power function
•			•
		•	
	•	•	•
	•		
		•	•
		-25 / 65	-25 / 65
		•	•
		•	•
		•	•
6	11	10,7	13,9
230 / 250	230 / 184	230 / 191	230 / 191
309×280×244	400×130×500	388×388×488	388×388×784
150	150		
Top / right / left / front / rear	Below	Vertical	Vertical
150		150	150
	180	180	180



Air quantity and sound level

Type	Maximum free flow rate (m³/h)	Air quantity (m³/h) / pressure (Pa)				Noise level dB(A) sound pressure (re20µPa) / sound power (re 1pW)			
		Setting I	Setting II	Setting III	Power setting	Setting I	Setting II	Setting III	Power setting
245.999	1000	401 / 350	503 / 410	634 / 370	760 / 450	30 / 42	35 / 47	40 / 53	43 / 57
445.999	1400	330 / 380	520 / 450	660 / 520	940 / 660	31 / 43	37 / 49	40 / 52	43 / 56
745.999	1180	855 / 590	975 / 625	1080 / 650	1150 / 670	61	62	63	64
755.999	1180	850 / 590	970 / 625	1075 / 650	1145 / 670	55	56	57	58

Sound level of roof motors measured on the suction side Lwa5 (dB(A)) (DIN 45635-2).

Maintenance

Grease filters

To ensure optimum filtering of grease it is necessary to regularly (1 x per month) clean the grease filter. The integrated cleaning indicator in almost all cooker hoods is a reminder and illuminates after 20 cooking hours. The grease filter can be cleaned in the dishwasher. However, we recommend replacing the filter after 5 years. The correct grease filter for each cooker hood can be found in the accessories table included on the individual product pages.

Stainless steel cleaner

For optimum cleaning of your stainless steel cooker hood we recommend you use Novy stainless steel cleaner. This is a soft nourishing mousse that leaves no traces leaving a clean surface.

906.060	Stainless steel cleaner	£29
---------	-------------------------	-----

Installation accessories

InTouch

InTouch offers the possibility to operate the Novy cooker hood from the Novy InTouch induction hob.

Practically all cooker hoods with electronic control can be operated as standard or with an optional InTouch kit to be combined with Novy InTouch induction hobs.

Novy Cloud, Pureline (Pro) (Compact), Maxi Pureline, Mini Pureline, Crystal, Fusion Pro, Fusion, Flatline, Phantom, Pureline Frame and Mood are standard equipped with the InTouch function.

For the telescopic cooker hood (663/693) and Vision an optional InTouch kit (incl. remote control) is available.

990.021	Kit for InTouch (incl. remote control)	£159
---------	--	------

Remote control

Novy Cloud, Pureline (Pro) (Compact), Maxi Pureline, Mini Pureline, Phantom, Pureline Frame and Mood are equipped with a remote control as standard.

The Novy Cloud, Pureline Pro (Compact) and Mood can also be controlled via the Novy Connect application.

Optionally, the Novy Crystal, Fusion Pro, Fusion, Flatline can be equipped with a remote control.

840.029	Remote control (white)	£104
840.049	Remote control (black)	£104

LED lighting kit

For a number of models you can replace the existing LED lighting of 2,700 K (warm white) by LED lighting of 4,000 K (neutral white).

Novy Pureline (Compact) and Mini Pureline are equipped with dual LED lighting for which the colour temperature can be changed manually, before installation, from 2,700 K (warm white) to 4,000 K (neutral white).

Control kit for external lighting or remote covers

Would you like to connect additional ambient light to your cooker hood? Or do you need to control a remote cover the moment the cooker hood is switched on? With the kit 990.030 you can control both. The kit can be used on Novy Pureline (Compact), Mini Pureline, Crystal, telescopic (663/693) and Flatline.

Novy Maxi Pureline, Pureline: 6833, 6834, 6838, 6839, 6843, 6844, 6848, 6849 are equipped as standard with a connector which makes it possible to switch on external lighting (max. 300 W).

Extension chimneys for wall and island hoods

If the standard lower chimney is too short, you can always opt for a extension chimney. When ordering an extension the lower chimney is included to avoid colour differences.

Input / output module

The potential-free input relay can be used to connect, for example, a window switch. This ensures that the extractor hood only switches on when a window or additional supply air valve is activated.

The output is a potential-free relay and therefore does not provide a direct output power. It is therefore possible to use it to control an external ambient lighting (not possible for the Novy Pureline Pro or Pureline Pro Compact) or electric valve with external power supply from the moment the extractor hood is activated.

Module 990.036 is suitable for Novy Panorama 90, Panorama 120, Pureline Pro and Pureline Pro Compact.

Adapter for limited installation height in ceiling, canopy, decorative chimney or cabinet

If the installation depth is limited, it is possible to dismount the Cubic motor from the Novy Pureline, Pureline Pro, Maxi Pureline and Mini Pureline. In this situation, an optional adapter can be ordered. The adapter is placed directly on the ceiling unit or recessed unit and connected to a flat rectangular duct. The motor is then mounted at a different location indoors. Please note that the input of the motor has a round connection. Always mount the adapter in combination with the remote motor kit.

To simplify the installation, it is recommended to use the flexible flat exhaust duct (906.408) for the last part between flat duct and extractor.

Novy Sense Sensor: Automatic speed regulation

The Novy Sense sensor offers both manual and automatic speed regulation for the Novy Pureline Pro and Pureline Pro Compact. In automatic mode, the sensor detects the intensity of cooking vapors (based on moisture and pollution) and odours and adjusts the motor speed to the optimal level. The air quality in the kitchen can be checked at any time via the Novy Connect app.

This sensor is optional and must be installed before the appliance is mounted to ensure optimal performance and convenience.


Installation accessories

The proper functioning of a cooker hood is partly determined by the correct installation of the device and it is important that you take this into consideration at an early stage of the construction process. Novy offers a wide range of installation accessories for your specific situation.

Flat exhaust ducts

These ducts are very suitable for ceilings with a small overall height.

906.401
Flat duct 1000 mm
89×222×1000 mm
(male)
£49



906.402
Connector
94×227×80 mm
(female)
£24



906.403
Horizontal bend 90°
with air deflectors
94×227×290 mm
(female)
£59



906.408
Flat flexible tube
89×222×750 mm
(male)
£94



906.404
Vertical bend 90° with
air deflectors
94×175×227 mm
(female)
£49



906.405
Angle adaptor
Ø 150 mm with
air deflectors (male)
94×227×205 mm (female)
Heigh 140 mm
£59



906.406
Transfer
Ø 150 mm
94×227×150 mm
(female)
£49



906.407
Wall duct stainless steel
with non-return valve
222×89 mm
depth connector
120 mm
£264



906.418
Bend 15° for flat duct
94×227×138 mm
(male/female)
£19



Non-return valves

The use of a non-return valve is advised to prevent cold air flows coming in from outside.

Non-return valve
906.431
mechanical non-return valve,
Ø 125 mm (male)
£49
906.432
mechanical non-return valve,
Ø 150 mm (male)
£59



Electric valve
906.270
electric valve Ø125 mm, 230 V (male)
N/C with spring return, to combine
with kit 990.030 - £294
906.271
electric valve Ø150 mm, 230 V (male)
N/C with spring return, to combine
with kit 990.030 - £309



Round ducting & accessories

Round tube 1 m (male)
906.410
Ø 125 mm
£49
906.415
Ø 150 mm
£49



Connector (female)
906.412
Ø 125 mm
£14
906.417
Ø 150 mm
£14



Bend 90° (with air deflectors
for a better result) (female)
906.411
Heigh 187 mm - Ø 125 mm - £34
906.416
Heigh 212 mm - Ø 150 mm - £49



Aluminium tube
906.216
Ø 127 mm, lenght 10 m - £94
906.218
Ø 152 mm, lenght 10 m - £94



Aluminium tube
906.219
Ø 127 mm, lenght 3 m - £49
906.217
Ø 152 mm, lenght 3 m - £49
906.430
Ø 202 mm, lenght 3 m - £59



Flexible silencer, lenght 1 m
906.288
Ø 127 mm - outer Ø 180 mm - £59
906.287
Ø 152 mm - outer Ø 210 mm - £59



Y-piece (male)
906.299
2×Ø 125 mm – Ø 150 mm - £79
906.298
2×Ø 150 mm – Ø 200 mm - £194
906.297
elbow 45° Ø 125 mm / stuk - £59



Clamp
906.290
range Ø 60 – 135 mm - £14
906.291
range Ø 60 – 215 mm - £14
906.292
aluminium tape width 50 mm
(per 50 m) - £34



Installation kit (non-return valve,
3 m aluminium tape, 3 m aluminium
tube 906.217 or 906.219)
906.300
Ø 125 mm - £104
906.301
Ø 150 mm - £124



Wall exhaust valve

This valve covers the exhaust duct. It keeps cold air out, but also other weather and natural influences, so that the exhaust does not get blocked.

Wall exhaust valve
906.078
173×173 mm, aluminium
for exhaust Ø 125 mm - £79
906.178
210×210 mm, aluminium
for exhaust Ø 150 mm - £94
906.400
210×210 mm, black (RAL9005)
for exhaust Ø 150 mm - £159
906.079
246×246 mm, aluminium
for exhaust Ø 200 mm - £104



Wall conduct kit for
Wall conduct kit with telescopic
pipe including built-in heat retention
non-return valve and stainless
steel grill for ground-level and
conventional installation at ceiling
height.
906.420
Ø 150 mm - £494
Wall conduct kit for flat exhaust duct
906.425
89×222 mm - £494



Exhaust grill for upper cabinet
Tailored design exhaust grill for
upper cabinets to optimise the
return of filtered air into the kitchen.
906.450
Connection diameter Ø 150 mm,
Cut-out in housing Ø 170 mm
£159







Induction hobs

Novy Undercover



Induction Pro



Induction Power



Induction Comfort



Induction Dominos



Induction Multizone



Cooking profile

Intensity						
-----------	--	--	--	--	--	--

Finish

Colour glass		Glossy black	Glossy black / Matte black	Glossy black / Matte black	Glossy black	Glossy black
--------------	--	--------------	----------------------------	----------------------------	--------------	--------------

Number of cooking zones

1						
2						
3						
4						
5						

Flexzone / Expandable zone

1						
2						

Dimensions cooking zones (mm)

Dimensions	230×230 / Ø280	200×240 / Ø280	200×240 / Ø230 / Ø280	Ø175 / Ø210 / Ø260	200×240 / Ø175 / Ø210	Ø175 / Ø210
------------	----------------	----------------	-----------------------	--------------------	-----------------------	-------------

p. 242

p. 252

p. 256

p. 260

p. 264

p. 268

Normal use, basic cooking function, different zones with different power

Normal use, extensive cooking functions, different zones with high power

Intensive use, extensive cooking function, equal zones with high power



INVISIBLE INDUCTION HOB

Hob and worktop in one

As the name suggests, this induction hob is fully integrated beneath the worktop, transforming the traditional cooking area into a multifunctional cooking surface.

The minimalist centerpoints, along with subtle engravings and LED indicators, discreetly reveal the presence of the cooking zones.

Thanks to this almost invisible design, the kitchen becomes more than ever a central hub in the house, suitable for various activities from meal preparation to cooking, dining, working from home, and more.



Multifunctional worktop

Thanks to the multifunctional worktop, you make optimal use of your kitchen space. Whether you're cooking, working from home, or enjoying a meal, this worktop effortlessly adapts to your needs.

The scratch- and stain-resistant Dekton® surface also makes cleaning a breeze.

NOVY | DEKTON


Minimalist design

Opt for visual tranquility with the Novy Undercover. The induction hob is invisibly integrated into the worktop, providing a serene kitchen environment that perfectly complements your modern interior.

Only the subtle centerpoints where your cookware is placed and the LED indicators are visible in this unique design.

Easy operation

Opt for unparalleled ease of use with the accompanying Novy controller. This intuitive interface, featuring both a control knob and a touchscreen, makes setting the cooking zones quick and easy.



An added benefit is the ability to configure personalized settings, allowing you to tailor your cooking experience to your exact preferences.

Optimal safety

Feel safe and comfortable with the Novy Undercover. Residual heat on the cooking surface is indicated by a subtle red LED and a message on the Novy controller. Once the residual heat has dissipated, the indicator automatically turns off, ensuring you can always safely enjoy your multifunctional worktop.

For added visibility, there is also an option to project this information onto the floor.



Customise your Novy Undercover

1 Choose the desired number of cooking zones

The Novy Undercover offers ultimate power and flexibility in your kitchen. Choose between 3 or 4 cooking zones, each with an impressive power output of 3700 W.

2 Choose a compatible high-quality worktop

The Novy Undercover allows you to fully personalize your kitchen according to your preferences.

With a selection of up to 40 different Dekton® worktops, you can choose a unique and stylish surface that perfectly matches your taste and kitchen design.


Video
Personalise your
Novy Undercover




The centerpoints of the Novy Undercover indicate where the cooking pots should be placed. They also contain a temperature sensor that measures the heat of the pot while cooking. Thanks to their subtle integration into the worktop, these centpoints are both minimalist and stylish. They have a characterful, slightly weathered look, finished in the elegant shade “Aged Silver”.

An additional benefit is that you can place the cookware directly on the worktop, allowing you to cook immediately without needing an extra accessory under the pot.

1 Choose the desired number of cooking zones

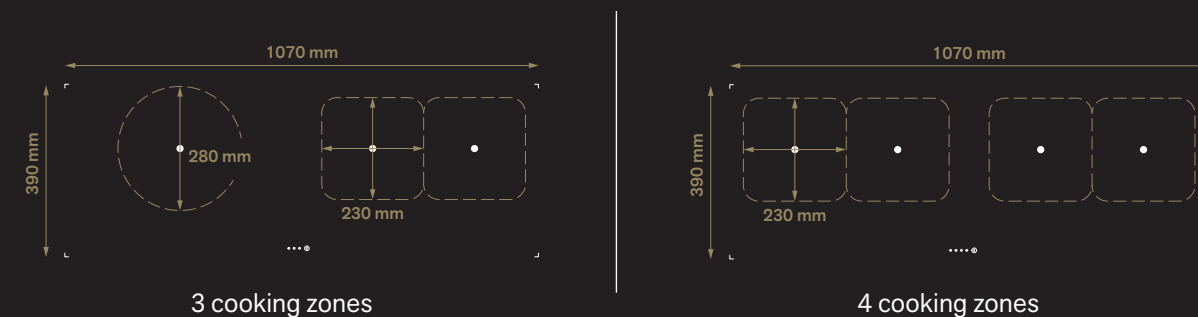

2 Choose a compatible high-quality worktop

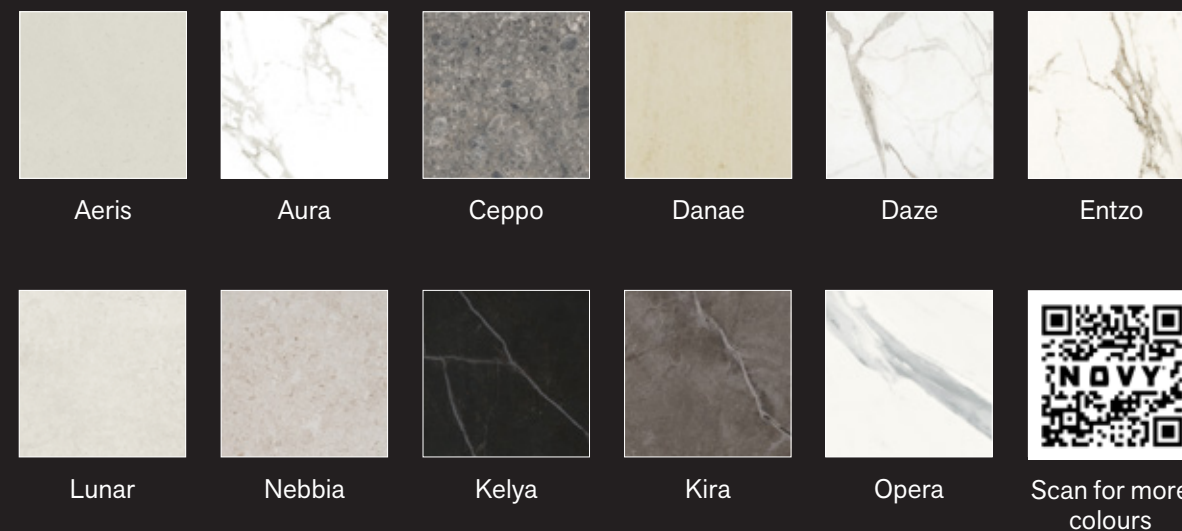

Aged Silver



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Undercover

- **Cooking directly on the worktop** (only with Dekton® 20mm) without additional tools or accessories
- **Minimalist design** for visual calm and atmosphere in the kitchen
- **Multifunctional worktop** for optimal use of the kitchen space (For indoor use only)
- **Design freedom** thanks to around 40 worktops and various cooking zones.
- **Durable material:** easy-care, scratch- and heat-resistant for long-lasting beauty
- **Easy operation** with the Novy controller via control knob and touch screen
- **Powerful cooking zones** of up to 3700W for efficient induction cooking like you're used to
- **Built-in safety features** such as residual heat indicator on the worktop, Novy controller and optional floor spotlight

Novy Undercover / Induction hobs



242 – 243



Flexzone
Automatic or manual bridge function of 2 cooking zones.



Minimalist design
Induction hob invisibly integrated into worktop



Min. dimensions worktop (B×D) (mm)	Cooking surface (B×D) (mm)	Number of zones		Cooking zones (mm)	Max. output (W)	Colour centerpoint	Ref.	Price/pc
1360×600	1070×390	3		ø280, 2× 230×230	7.400	Aged Silver	53006-c0	£4,199
1380×600	1070×390	4		4× 240×230	7.400	Aged Silver	53007-c0	£4,499



ABOUT
NOVY



COOKER
HOOD
GUIDELINES



VENTING
HOODS



CEILING
UNITS



BUILT-IN
COOKER
HOODS



TELESCOPIC
COOKER
HOODS



WALL-
MOUNTED
COOKER
HOODS



ISLAND
COOKER
HOODS



COOKER
HOOD
ACCESSORIES



INDUCTION
HOBS



GAS HOBS



DESIGNER
LIGHTING







INFO

Technical specifications

	Novy Undercover 3 zones	Novy Undercover 4 zones
	53006-c0 Aged Silver	53007-c0 Aged Silver
Controls		
Type of controls	Novy controller with touch display and rotary/push button	Novy controller with touch display and rotary/push button
Colour of controls	Black	Black
On/Off button	Integrated in worktop	Integrated in worktop
Indicator LEDs	Integrated in worktop	Integrated in worktop
Installation method / Finish		
Undermount	Under compatible 20 mm Dekton® worktop	Under compatible 20 mm Dekton® worktop
Width base unit (mm)	1200	1200
Induction hob functions		
Number of power levels	9+Power	9+Power
Cooking presets	•	•
Automatic pot recognition	•	•
Flexzones	• (1 ×)	• (2 ×)
Automatic bridge function flexzones	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Grill function	•	•
Safety lock hob	•	•
Stop & Go	•	•
Automatic temperature protection worktop	•	•
Residual heat indication in worktop	•	•
Residual heat indication via Novy controller	•	•
Residual heat indication via floor spot heat indicator	optional	optional
Cooking zones		
Number of cooking zones	3	4
Cooking zone 1	Left	Left
Dimensions (mm) / Output (Boost) (W)	ø280 (3700)	230×230 / 2700 (3700)
Cooking zone 2	Right middle	Left middle
Dimensions (mm) / Output (Boost) (W)	230×230 / 2700 (3700)	230×230 / 2700 (3700)
Cooking zone 3	Right	Right middle
Dimensions (mm) / Output (Boost) (W)	230×230 / 2700 (3700)	230×230 / 2700 (3700)
Cooking zone 4		Right
Dimensions (mm) / Output (Boost) (W)		230×230 / 2700 (3700)
		
Dimensions		
Dimensions (B×D×H) (mm)	See p. 245	See p. 245
Opening according to Cosentino design specifications	See p. 245	See p. 245
Weight (kg)	16,9	17,7
Technical details		
Total connected load (W)	7400	7400
Multiphase supply voltage	230 V / 400 V – 2N	230 V / 400 V – 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Supplied accessories		
Novy controller	•	•
USB-C adapter for charging Novy controller	•	•
Novy docking station for charging Novy controller	•	•

Technical specifications

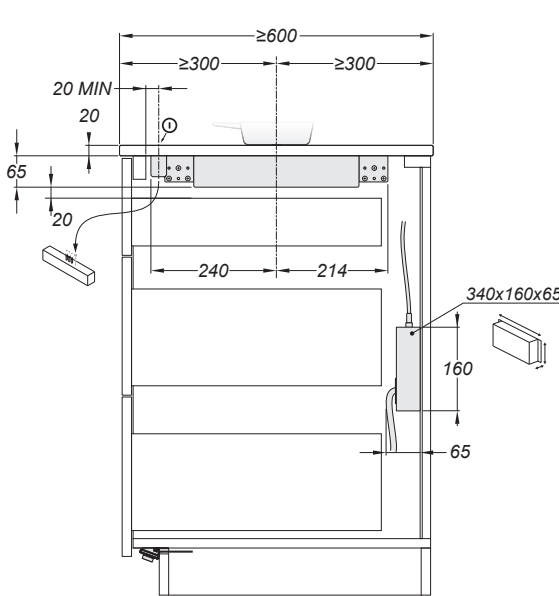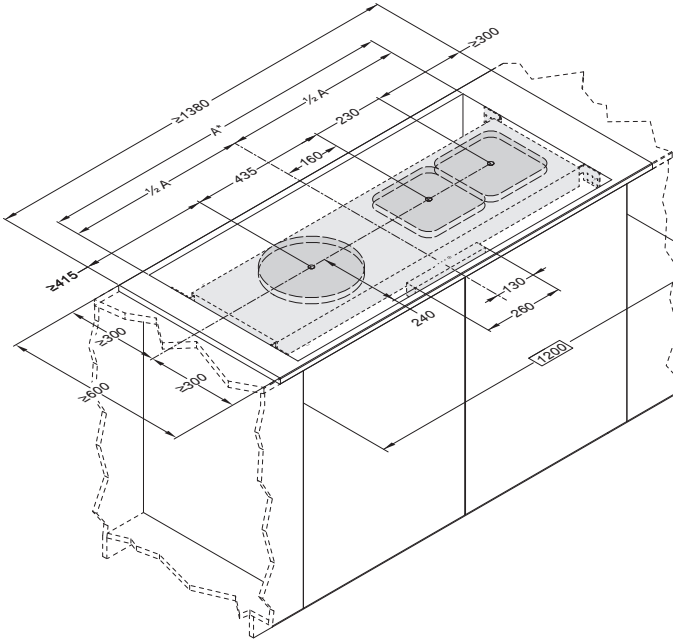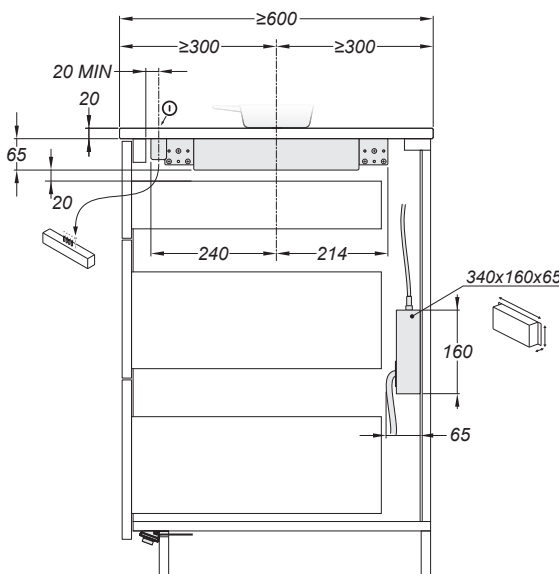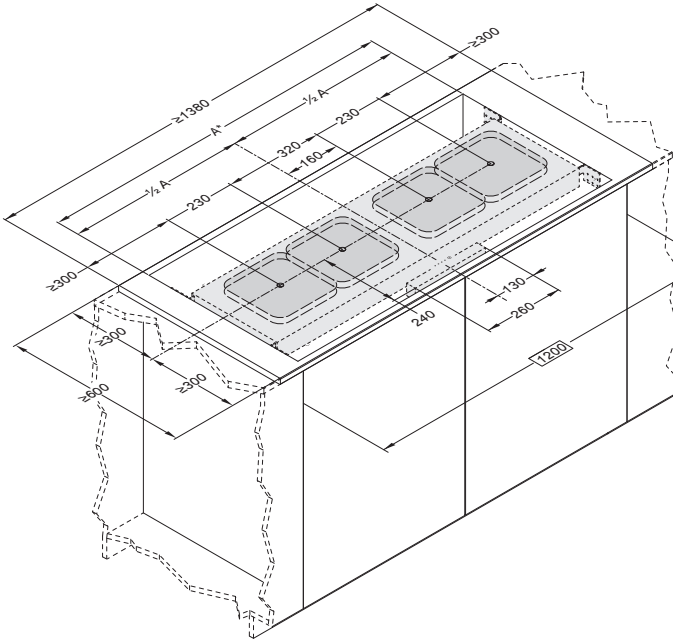Novy Undercover	
53006-c0	
	
Novy Undercover	
53007-c0	
	

Video
Installation video



Accessories

	Reference	Price/pc	53006-c0	53007-c0
Miscellaneous				
Novy controller (supplied by default)	950011	£579	•	•
Novy floor spot heat indicator	53005049	£259	•	•
Grill plate (240×415 mm)	1700.093	£309	•	•
Teppanyaki plate (240×415 mm)	1700.095	£309	•	•
Roaster (260×410×80 mm - 6,5L)	1700.099	£319	•	•
Lid for roaster (1700.099)	1700.100	£100	•	•



Design criteria

When designing a kitchen with the Novy Undercover induction hob, it is essential to consider several important design criteria.

Consult the design document via the QR code below for more detailed information. This document provides kitchen designers with essential information, including technical specifications, design requirements, and installation instructions for combining Dekton® worktops with Novy Undercover induction hobs.


With correct and precise installation according to the guidelines in this document, the 25-year warranty on the Dekton® worktop remains valid.



Technical information
Design manual



Some key points of attention:
Consult the full design document via the QR code

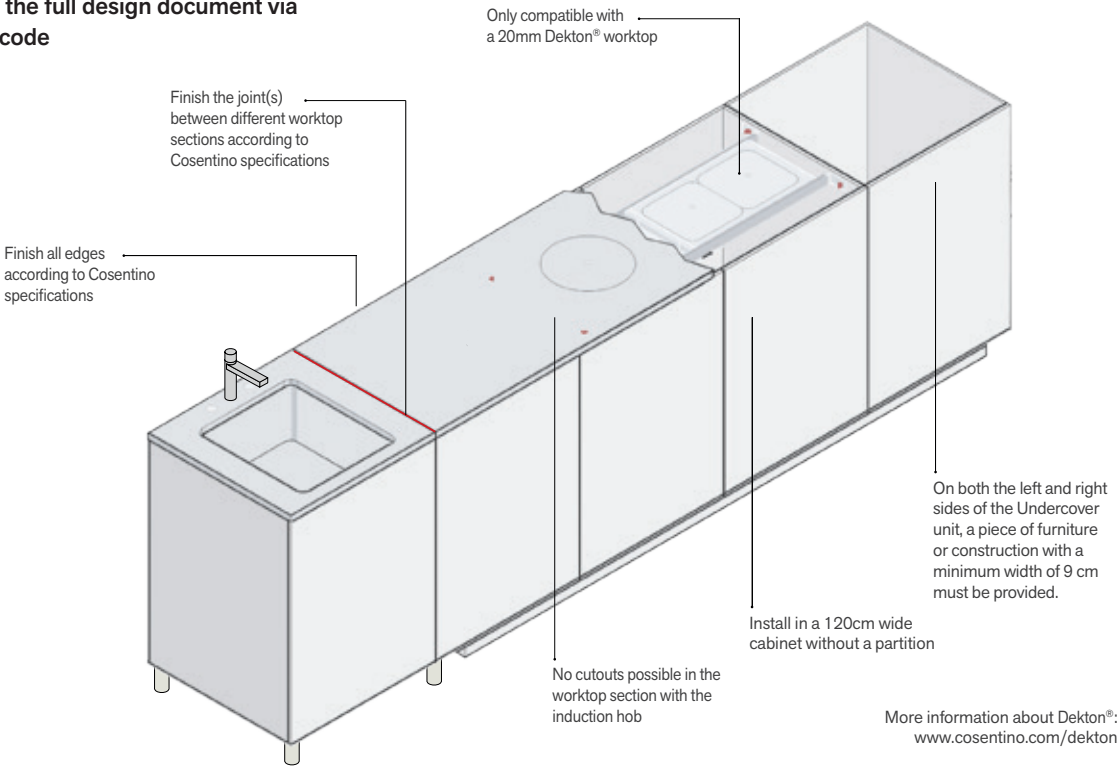

More information about Dekton®:
www.cosentino.com/dekton



Make the most of your Novy Undercover

The Novy Undercover induction hob offers innovation and style, but for an optimal cooking experience, the right cooker hood is essential. To efficiently extract cooking fumes and odours, a Novy cooker hood from the list below is essential. It must be at least as wide as your hob. Only then will you enjoy maximum performance and a fresh, pleasant kitchen.

Ceiling units

		Compatible with 3 cooking zones	Compatible with 4 cooking zones
Novy Cloud 230 / 232			
Novy Pureline (Pro) 120 cm (Compact / Cubic) 6920 / 6921 / 6922 / 6940 / 6941 / 6942 / 6820 / 6821 / 6822 / 6840 / 6841 / 6843 / 6844 / 6845 / 6846 / 6848 / 6849			
Novy Maxi Pureline 855 / 856			


Telescopic cooker hoods

Novy Fusion Pro 8770 / 8771			
---------------------------------------	---	-------------	-------------

Wall-mounted cooker hoods

Novy Flatline 7610 / 7612 / 7615			
--	---	-------------	-------------

Island cooker hoods

Novy Phantom Frame / Cable 7540 / 7530			
Novy Pureline Frame 15002 / 15004 / 15006 / 15008 / 15010 / 15012			
Novy Mood 7550 / 7552			
Novy Flatline 120 cm 7660 / 7665			

INDUCTION HOBS WITH GLASS SURFACE

Flexibility in design and function

You can cook intuitively. The cooker hood can also be controlled from the hob. InTouch technology combines cooker hood and induction hob into one, without the need for remote control. Wireless, and seamless.

- InTouch connection with cooker hood
- Flexible cooking zones
- Automatic pot detection

Installation method

Have your induction hob placed on top of the worktop (surface-mounted) or opt for recessed integration (flush-mounted) and go completely seamless.

Intuitive operation

All our hobs can be operated intuitively. Thanks to the slider and touch control function every temperature change is at your fingertips.

Minimalist design

A sleek design stripped of all frills - you'll recognise this in every Novy hob. Even the controls remain in the background and only light up when you start cooking.



Convenient flex zones

Connect two cooking zones into one large cooking zone. Convenient if you have large pots and pans on the hob, or if you want to grill like on the barbecue.



Pot move function

Move your pot or pan to a new zone without losing the programming of the current zone.



Pro with the Chef

The Chef function automatically links flex zones into 2 or 3 cooking zones (depending on the type of hob) and divides them into different programmes. Choose between quick power cooking, simmering or keep warm.



InTouch technology

Operate your cooker hood from your induction hob with wireless RF communication.





Induction Pro

- Sleek design
- Flexible cooking with octagonal zones
- Intouch control for easy operation of the cooker hood
- Professional features like Chef mode, Pot Move, timer
- White slider touch for premium look
- Powerful 3700W per octagonal zone
- Flexible installation: Surface or flush mount



InTouch
Function for controlling the cooker hood from the hob.

Flexzone
Automatic or manual bridge function of two cooking zones.

Keep-warm function
Keep-warm function to keep food at a constant temperature.

Chef function
Chef function for activation of programmed zones.






Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Colour	Ref.	Price/pc
65×52	56×49	4 • • • •	4 × 240×200	•	7400	Glossy black	1773	£2,209
80×52	75×49	4 • • • •	4 × 240×200	•	7400	Glossy black	1775	£1,924
80×52	75×49	5 • • • • •	4 × 240×200, 200×300	•	11100	Glossy black	1776	£3,129
91×41	89×39	4 • • • •	4 × 200×240	•	7400	Glossy black	1777	£2,839
90×52	85×49	5 • • • • •	4 × 240×200, Ø280	•	11100	Glossy black	1778	£3,254

Video
Five reasons for choosing
a Novy induction hob



Technical specifications

			
	Induction Pro 1773	Induction Pro 1775	Induction Pro 1776
Finish			
Colour glass	Glossy black	Glossy black	Glossy black
Type of controls	Slider touch control	Slider touch control	Slider touch control
Colour or controls	White	White	White
Finish	Round border	Round border	Round border
Installation options			
Surface / Flush	• / •	• / •	• / •
Functions cooker hood			
InTouch function	•	•	•
Number of power levels	9+Power + SuperPower	9+Power + SuperPower	9+Power + SuperPower
Chef function	•	•	•
Pot move function	•	•	•
Count-up timer	•	•	•
Cooking presets	•	•	•
Wipe guard	•	•	•
Automatic pot detection	•	•	•
Flexzone	• (×2)	• (×2)	• (×2)
Automatic bridge function Flexzone	•	•	•
Residual heat indication	•	•	•
Timer on each zone	•	•	•
Independent cooking timer	•	•	•
Keep-warm function (°C)	42°, 70° and 94°	42°, 70° and 94°	42°, 70° and 94°
Grill function	• (×2)	• (×2)	• (×2)
Safety lock hob	•	•	•
Stop & Go	•	•	•
Automatic cooking	•	•	•
Cooking zones			
Number of cooking zones	4	4	5
Cooking zone 1	Front left	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 2	Rear left	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 3	Right front	Right front	Central
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	200×300 / 2100 (3700)
Cooking zone 4	Back right	Back right	Right front
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3700)	240×200 / 2100 (3700)	240×200 / 2100 (3700)
Cooking zone 5			Back right
Dimensions (mm) / Power (Boost) (W)			240×200 / 2100 (3700)
			
Dimensions (Installation details see p. 272-273)			
Dimensions (W×D×H) (mm)	650×520×47	800×520×47	800×520×47
Opening (B×D) (mm)	560×490	750×490	750×490
Weight (kg)	11.5	13.5	14.2
Technical details			
Total connected load (W)	7400	7400	11100
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N	230 V / 400 V - 2N / 3N
Single-phase supply voltage	230 V	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60	50 – 60
Accessories			
Side profiles (Stainless steel) 1700.092 - £69	•	•	•
Side profiles (Mineral Black) 1700.088 - £69	•	•	•
Grill plate (240×415 mm) 1700.093 - £309	•	•	•
Teppanyaki plate (240×415 mm) 1700.095 - £309	•	•	•
Roaster (260×410×80 mm - 6,5L) 1700.099 - £319	•	•	•
Lid for roaster (1700.099) 1700.100 - £100	•	•	•



Induction Pro
1777

Glossy black
Slider touch control
White
Round border

• / •



Induction Pro
1778

Glossy black
Slider touch control
White
Round border

• / •

•	•
9+Power + SuperPower	9+Power + SuperPower
•	•
•	•
•	•
•	•
•	•
• (×2)	• (×2)
•	•
•	•
•	•
•	•
42°, 70° and 94°	42°, 70° and 94°
• (×2)	• (×2)
•	•
•	•
•	•


4	5
Left	Front left
200×240 / 2100 (3700)	240×200 / 2100 (3700)
Left central	Rear left
200×240 / 2100 (3700)	240×200 / 2100 (3700)
Right central	Central
200×240 / 2100 (3700)	280 / 2600 (5500)
Right	Right front
200×240 / 2100 (3700)	240×200 / 2100 (3700)
	Back right
	240×200 / 2100 (3700)



910×410×47	900×520×47
890×390	850×490
14.8	16.7

7400	11100
230 V / 400 V - 2N	230 V / 400 V - 2N / 3N
230 V	230 V
50 – 60	50 – 60

	•
	•
	•
•	•
•	•
•	•
•	•



1700.088



1700.092



1700.099 + 1700.100



1700.093



1700.095



Induction Power

- Sleek design
- Great flexibility with octagonal and round zones
- Intouch control for easy operation of the cooker hood
- Extended functions and one Flexzone
- Easy operation with red slider touch control
- Max 3000W per zone
- Flexible installation: Surface or flush mount
- Matte Line design (1726-g1, 1763-g1, 1768-g1):
 - Matt black glass for a contemporary look
 - Durable finish with fewer visible signs of use
 - White controls for a premium appearance



InTouch
Function for controlling the cooker hood from the hob.



Flexzone
Automatic or manual bridge function of two cooking zones.





Keep-warm function
Keep-warm function to keep food at a constant temperature.



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Colour	Ref.	Price/pc
65×52	56×49	4	2× 240×200, 2× Ø210	▪	7400	Glossy black	1763	£1,489
65×52	56×49	4	2× 240×200, 2× Ø210	▪	7400	Matte black	1763-g1	£1,719
80×52	75×49	4	2× 240×200, Ø230, Ø280		7400	Glossy black	1724	£1,609
80×52	75×49	4	2× 240×200, Ø230, Ø280	▪	7400	Glossy black	1726	£1,719
80×52	75×49	4	2× 240×200, Ø230, Ø280	▪	7400	Matte black	1726-g1	£1,949
90×52	85×49	5	2× 240×200, Ø280, 2× Ø200	▪	11100	Glossy black	1768	£2,179
90×52	85×49	5	2× 240×200, Ø280, 2× Ø200	▪	11100	Matte black	1768-g1	£2,409
100×40	98×38	4	2× 200×240, 2× Ø230	▪	7400	Glossy black	1767	£1,949

Technical specifications

		
	Induction Power 1724	Induction Power 1726 / 1726-g1
Finish		
Colour glass	Glossy black	1726 Glossy black 1726-g1 Matte black
Type of controls	Slider touch control	Slider touch control
Colour or controls	Red	1726 Red / 1726-g1 White
Finish	Round border	Round border
Installation options		
Surface / Flush	• / •	• / •
Functions		
InTouch function		•
Number of power levels	9 + Power + SuperPower	9 + Power + SuperPower
Count-up timer	•	•
Automatic pot detection	•	•
Flexzone	• (x1)	• (x1)
Automatic bridge function Flexzone	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)	70°	1726: 70° 1726-g1: 42°, 70° en 94°
Safety lock hob	•	•
Stop & Go	•	•
Automatic cooking	•	•
Cooking zones		
Number of cooking zones	4	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	240×200 / 2100 (3000)	240×200 / 2100 (3000)
Cooking zone 3	Right front	Right front
Dimensions (mm) / Power (Boost) (W)	230 / 2300 (3000)	230 / 2300 (3000)
Cooking zone 4	Back right	Back right
Dimensions (mm) / Power (Boost) (W)	280 / 2300 (3000))	280 / 2300 (3000)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		
		
Dimensions (Installation details see p. 272-273)		
Dimensions (W×D×H) (mm)	800×520×47	800×520×47
Opening (B×D) (mm)	750×490	750×490
Weight (kg)	13.4	13.4
Technical details		
Total connected load (W)	7400	7400
Multiphase supply voltage	230 V / 400 V – 2N	230 V / 400 V – 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Accessories		
Side profiles (Stainless steel) 1700.092 - £69	•	•
Side profiles (Mineral Black) 1700.088 - £69	•	•

		
Induction Power 1763 / 1763-g1	Induction Power 1767	Induction Power 1768 / 1768-g1
1763 Glossy black 1763-g1 Matte black Slider touch control 1763 Red / 1763-g1 White Round border	Glossy black Slider touch control Red Round border	1768 Glossy black 1768-g1 Matte black Slider touch control 1768 Red / 1768-g1 White Round border
• / •	• / •	• / •
• 9 + Power + SuperPower • • • (x1) • • • • • 1763: 70° 1763-g1: 42°, 70° en 94° • • •	• 9 + Power + SuperPower • • • (x1) • • • • • 70° • • •	• 9 + Power + SuperPower • • • (x1) • • • • • 1768: 70° 1768-g1: 42°, 70° en 94° • • •
4 Front left 240×200 / 2100 (3000) Rear left 240×200 / 2100 (3000) Right front 210 / 1400 (2100) Back right 210 / 1400 (2100)	4 Front left 200×240 / 2100 (3000) Left central 200×240 / 2100 (3000) Right central 230 / 2300 (3000) Back right 230 / 2300 (3000)	5 Front left 240×200 / 2100 (3000) Rear left 240×200 / 2100 (3000) Central 280 / 2300 (3000) Right front 200/ 1400 (2100) Back right 200/ 1400 (2100)
		
650×520×47 560×490 11.1	1000×400×47 980×380 14.8	900×520×47 850×490 15.7
7400 230 V / 400 V – 2N 230 V 50 – 60	7400 230 V / 400 V – 2N 230 V 50 – 60	11100 230 V / 400 V – 2N / 3N 230 V 50 – 60
• •		• •



Induction Comfort

- **Round zones** with various sizes
- **Standard functions** for user convenience
- **InTouch control** for easy operation of the cooker hood
- **Easy operation** with red slider touch control
- **Flexible installation:** Surface or flush mount
- **Matte Line design (1755-g1, 1758-g1):**
 - **Matt black glass** for a contemporary look
 - **Durable finish** with fewer visible signs of use



InTouch
Function for controlling the cooker hood from the hob.


Keep-warm function
Keep-warm function to keep food at a constant temperature.



Outside dimensions (W×D) (cm)	Opening (W×D) (cm)	Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Colour	Ref.	Price/pc
65×52	56×49	3	2× Ø200, Ø290	•	6400	Glossy black	1752	£979
65×52	56×49	4	2× Ø175, 2× Ø210		7400	Glossy black	1753	£1,029
65×52	56×49	4	2× Ø175, 2× Ø210		7400	Matte black	1753-g1	£1,149
80×52	75×49	4	2× Ø175, 2× Ø210		7400	Glossy black	1754	£1,149
80×52	75×49	4	2× Ø175, 2× Ø210	•	7400	Glossy black	1755	£1,259
80×52	75×49	4	2× Ø175, 2× Ø210	•	7400	Matte black	1755-g1	£1,379
80×37	76×34	3	Ø175, 2× Ø210	•	6700	Glossy black	1757	£1,259
90×52	85×49	5	3× Ø175, Ø210, Ø250	•	7400	Glossy black	1758	£1,719
90×52	85×49	5	3× Ø175, Ø210, Ø250	•	7400	Matte black	1758-g1	£1,839

Technical specifications


		
	Induction Comfort 1752	Induction Comfort 1753 / 1753-g1
Finish		
Colour glass	Glossy black	1753 Glossy black 1753-g1 Mate black
Type of controls	Touch control	Slider touch control
Colour or controls	Red	Red
Finish	Round border	Round border
Installation options		
Surface / Flush	• / •	• / •
Functions cooker hood		
InTouch function	•	
Number of power levels	9 + Power	9 + Power
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)		70°
Safety lock hob	•	•
Stop & Go		•
Automatic boiling function		•
Cooking zones		
Number of cooking zones	3	4
Cooking zone 1	Front left	Front left
Dimensions (mm) / Power (Boost) (W)	200 / 1400 (2000)	210 / 2300 (3000)
Cooking zone 2	Rear left	Rear left
Dimensions (mm) / Power (Boost) (W)	200 / 1100 (1400)	175 / 1100 (1400)
Cooking zone 3	Right	Right front
Dimensions (mm) / Power (Boost) (W)	290 / 2300 (3000)	175 / 1100 (1400)
Cooking zone 4		Back right
Dimensions (mm) / Power (Boost) (W)		210 / 2300 (3000)
Cooking zone 5		
Dimensions (mm) / Power (Boost) (W)		
		
Dimensions (Installation details see p. 272-273)		
Dimensions (W×D×H) (mm)	650×520×52	650×520×52
Opening (B×D) (mm)	560×490	560×490
Weight (kg)	10.1	11
Technical details		
Total connected load (W)	6400	7400
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Accessories		
Side profiles (Stainless steel) 1700.092 - £69	•	•
Side profiles (Mineral Black) 1700.088 - £69	•	•

		
Induction Comfort 1754 / 1755 / 1755-g1	Induction Comfort 1757	Induction Comfort 1758 / 1758-g1
1754 & 1755 Glossy black 1755-g1 Mate black	Glossy black	1758 Glossy black 1758-g1 Mate black
Slider touch control	Slider touch control	Slider touch control (round)
Red	Red	Red
Round border	Round border	Round border
• / •	• / •	• / •
• (only for 1755 and 1755-g1)	•	•
9 + Power	9 + Power	9 + Power
•	•	•
•	•	•
•	•	•
70°	70°	70°
•	•	•
•	•	•
•	•	•
4	3	5
Front left	Left	Front left
210 / 2300 (3000)	210 / 2300 (3000)	175 / 1400 (2000)
Rear left	Central	Rear left
175 / 1100 (1400)	175 / 1100 (1400)	175 / 1100 (1400)
Right front	Right	Central
175 / 1100 (1400)	210 / 2300 (3000)	250 / 2300 (3000)
Back right		Right front
210 / 2300 (3000)		175 / 1100 (1400)
		Back right
		210 / 2300 (3000)
		
800×520×52	800×370×52	900×520×52
750×490	760×340	850×490
12.6	10.9	16.8
7400	6700	7400
230 V / 400 V - 2N	230 V / 400 V - 2N	230 V / 400 V - 2N
230 V	230 V	230 V
50 – 60	50 – 60	50 – 60
•		•
•		•



Induction Dominos

- **Full freedom:** Create your ideal cooking set-up
- **Easy operation:** Red slider or touch control
- **Flexible installation:** Surface or flush mount
- **Perfect match** with Novy Up

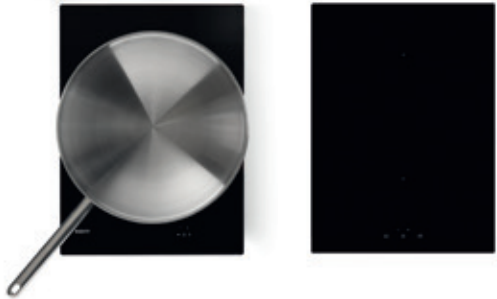

Type	Outside dimensions (W×D) (cm)	Number of zones	Cooking zones (mm)	Max. output (W)	Colour	Ref.	Price/pc
Induction 38 cm							
Induction Comfort	38×52	2	Ø175, Ø210	3700	Glossy black	3784	£844
Induction Power	38×52	2	2× 240×200	3700	Glossy black	3774	£964
Induction Pro	38×52	2	2× 240×200	3700	Glossy black	3762	£1,569
Teppan yaki	38×52	2		2800	Stainless steel / Glossy black	3753	£2,599
Wok ⁽¹⁾	38×52	1		3200	Glossy black	3773	£2,289
Fryer							
Fryer	29×52			2000	Stainless steel	3711	£719

(1) Demeyere wok Ø36 cm included as standard..

Technical specifications



Finish		
Colour glass		Glossy black
Type of controls	Slider touch control	Slider touch control
Colour or controls	Red	Red
Finish	Round border	Round border

Installation options		
Surface / Flush	• / •	• / •

Functions		
Residual heat indication	•	•
Automatic pot detection		•
Flexzone	• (×1)	• (×1)
Manual bridge function Flexzone	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)	120°, 150° and 180°	42°, 70° and 94°
Safety lock hob	•	•
Stop & Go	•	•
Automatic boiling function		•


Cooking zones		
Number of cooking zones	2	2
Cooking zone 1	Front	Front
Dimensions (mm) / Power (Boost) (W)	1400	240×200 / 2100 (3700)
Cooking zone 2	Back	Back
Dimensions (mm) / Power (Boost) (W)	1400	240×200 / 2100 (3700)



Dimensions (Installation details see p. 272-273)		
Dimensions (W×D×H) (mm)	380×520×54	380×520×47
Opening (B×D) (mm)	370×490	350×490
Weight (kg)	10,4	7
Content (l)		

Technical details		
Total connected load (W)	2800	3700
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60
Connection cable	•	•

Accessories		
Demeyere Wok (included)		
Profile Domino's 3730.020 - £34	Optional	Optional

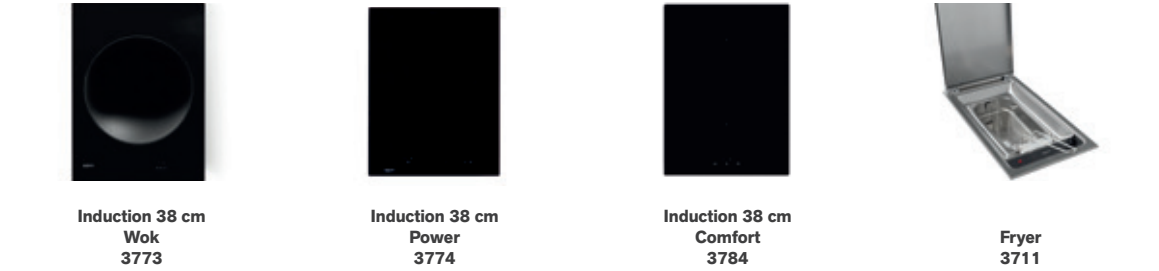

Glossy black	Glossy black	Glossy black	
Slider touch control	Touch control	Touch control	Rotating button
Red	Red	Red	
Round border	Round border	Round border	Round border

• / •	• / •	• / •	• / -
-------	-------	-------	-------

•	•	•	
	• (×1)		
	•		
•	•	•	
•	•	•	
42°, 70° and 94°			
•	•	•	
•			

1	2	2	
Front	Front	Front	
360 (wok) / 2000 (3200)	240×200 / 1600 (1850)	175 / 1100 (1400)	
	Back	Back	
	240×200 / 2100 (3000)	210 / 2300 (3000)	



380×520×121	380×520×52	380×520×52	290×520×235
370×490	350×490	350×490	270×475
11,6	11,6	7	6,1
			4


3200	3700	3700	2000
230 V	230 V	230 V	230 V
50 – 60	50 – 60	50 – 60	50 – 60
•	•	•	•

•			
Optional	Optional	Optional	



Induction Multizone

- **Three or four cooking zones** with separate control area
- **Design freedom** to place zones as desired
- **Standard functions** for user convenience
- **Easy operation** with red slider
- **Flexible installation:** Surface or flush mount





InTouch
Function for controlling the cooker hood from the hob.




Keep-warm function
Keep-warm function to keep food at a constant temperature.



Number of zones	Cooking zones (mm)	InTouch	Max. output (W)	Colour	Ref.	Price/pc
4 	2× Ø175, 2× Ø210	•	7400	Glossy black	1790	£2,049
3 	Ø175, 2× Ø210	•	6800	Glossy black	1791	£2,049

Technical specifications

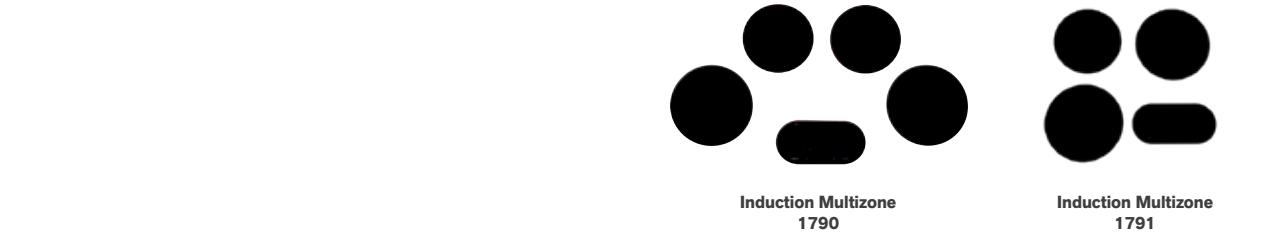

Finish		
Colour glass	Glossy black	Glossy black
Type of controls	Slider touch control	Slider touch control
Colour or controls	Red	Red
Finish	Round border	Round border

Installation options		
Surface / Flush	• / •	• / •

Functions cooker hood		
InTouch function	•	•
Residual heat indication	•	•
Timer on each zone	•	•
Independent cooking timer	•	•
Keep-warm function (°C)	70°	70°
Safety lock hob	•	•
Stop & Go	•	•

Cooking zones		
Number of cooking zones	4, zones to be positioned as required	3, zones to be positioned as required
Cooking zone 1	Left	Front left
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	210 / 2300 (3100)
Cooking zone 2	Left central	Rear left
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	175 / 1100 (1770)
Cooking zone 3	Right central	Back right
Dimensions (mm) / Power (Boost) (W)	175 / 1100 (1770)	210 / 2300 (3100)
Cooking zone 4	Right	
Dimensions (mm) / Power (Boost) (W)	210 / 2300 (3100)	




Dimensions		
Dimensions (W×D×H) (mm)	see p. 271	see p. 271
Opening (B×D) (mm)	see p. 271	see p. 271
Weight (kg)	14.5	12.4

Technical details		
Total connected load (W)	7400	6800
Multiphase supply voltage	230 V / 400 V - 2N	230 V / 400 V - 2N
Single-phase supply voltage	230 V	230 V
Frequency (Hz)	50 – 60	50 – 60

Technical drawing


Dimensions

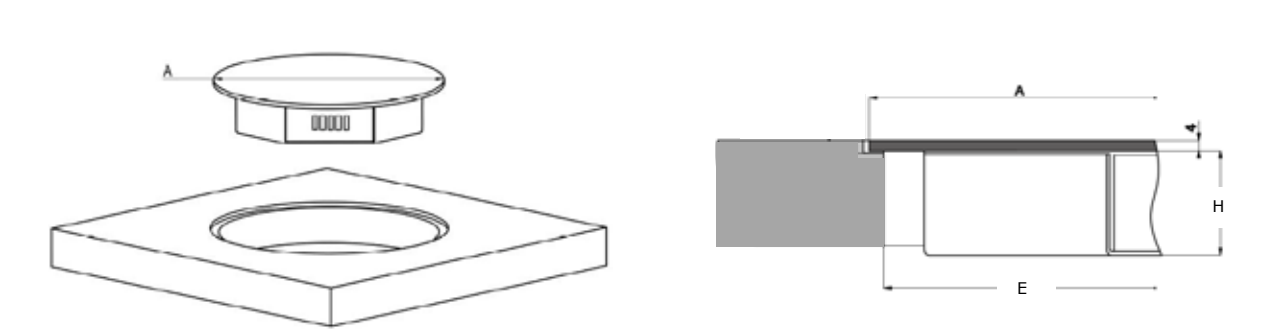

			(mm)	A	E	H
Diam A	300 mm	Cooking zone 210 mm	Cooking zone 175	Ø 270	Ø 254	57
Diam A	270 mm	Cooking zone 175 mm	Cooking zone 210	Ø 300	Ø 284	57
			Control panel	326×160– R80	314×150– R75	35


Built-in sketch

Surface

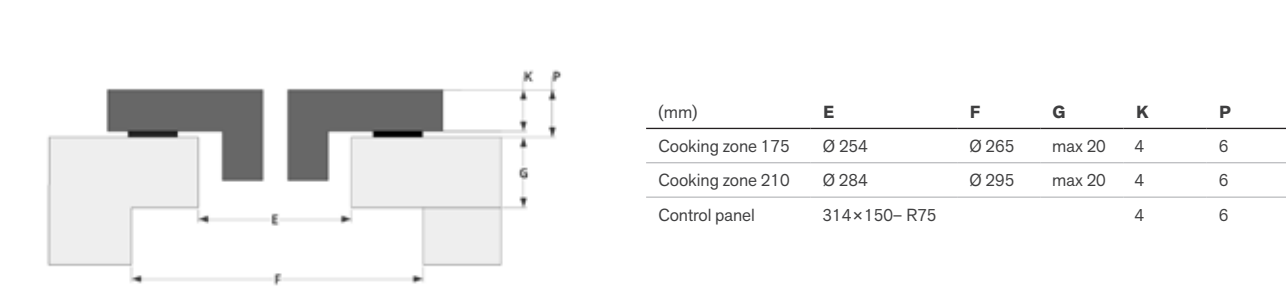

(mm)	E	F	G	K	P
Cooking zone 175	Ø 254	Ø 265	max 20	4	6
Cooking zone 210	Ø 284	Ø 295	max 20	4	6
Control panel	314×150– R75			4	6


Flush

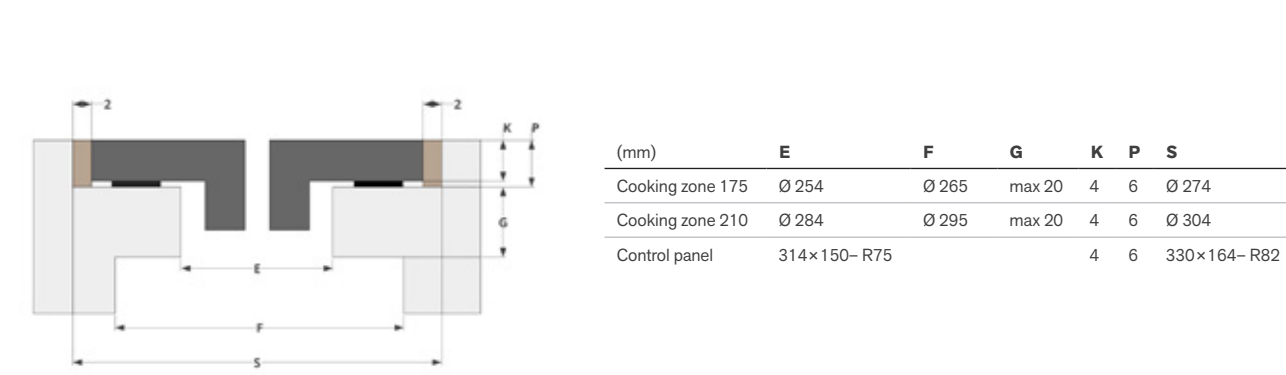


(mm)	E	F	G	K	P	S
Cooking zone 175	Ø 254	Ø 265	max 20	4	6	Ø 274
Cooking zone 210	Ø 284	Ø 295	max 20	4	6	Ø 304
Control panel	314×150– R75			4	6	330×164– R82

Installation of a Novy hob


Dimensions

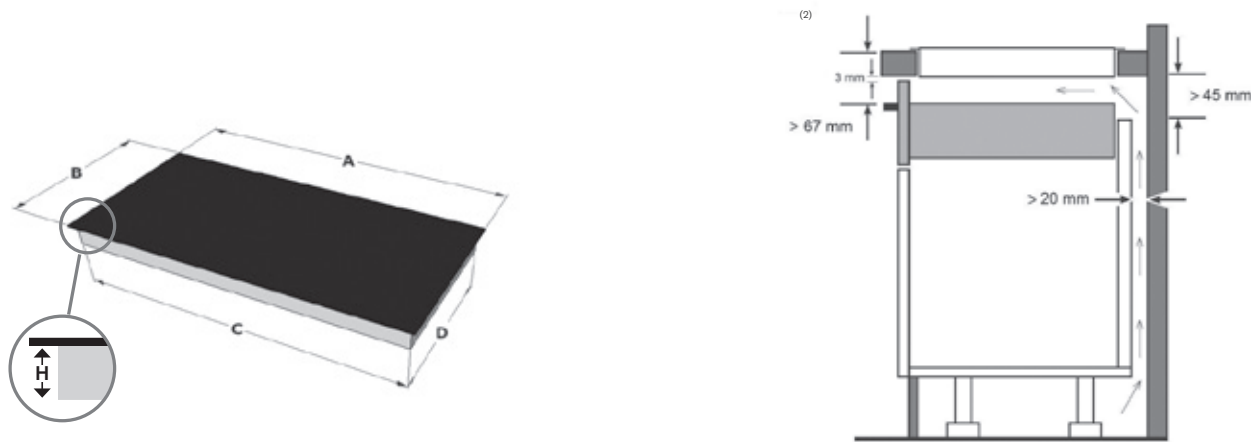

Surface installation

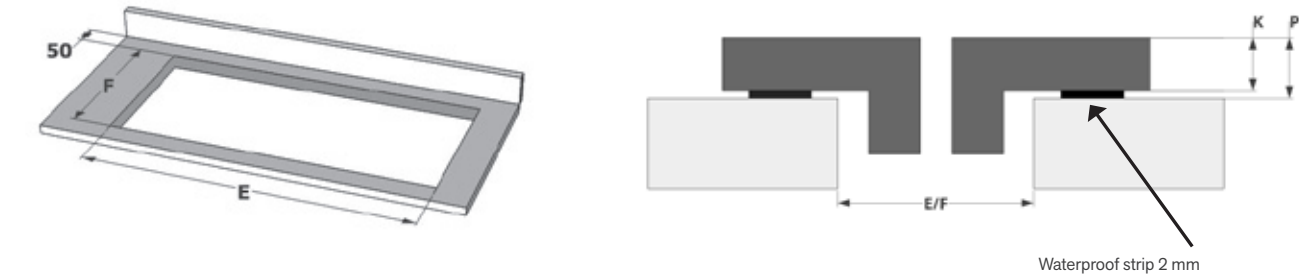

Flush installation

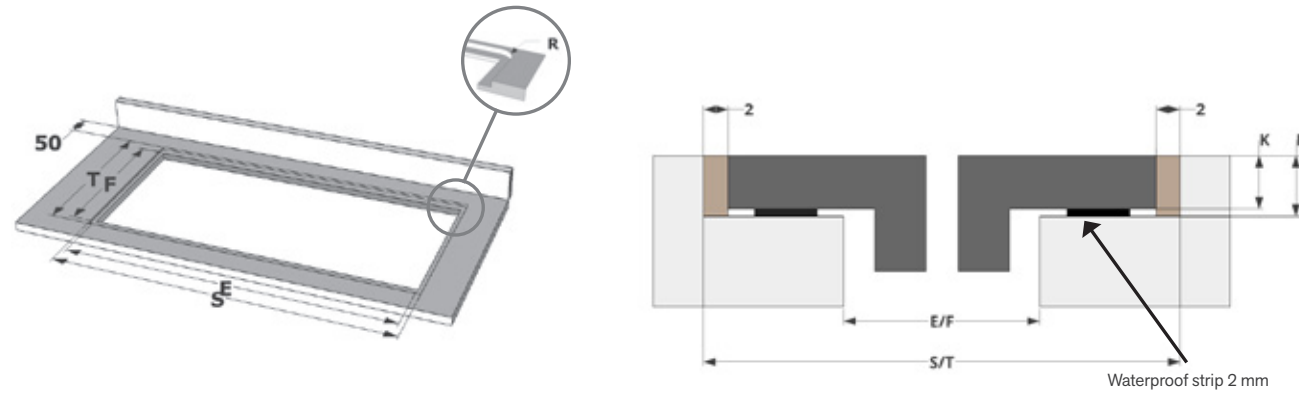

	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Pro										
1773	650	520	560	490	47	7	654	524	4	6
1775	800	520	750	490	47	7	804	524	4	6
1776	800	520	750	490	47	7	804	524	4	6
1777	910	410	890	390	47	7	914	414	4	6
1778	900	520	850	490	47	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Power										
1724	800	520	750	490	47	7	804	524	4	6
1726, 1726-g1	800	520	750	490	47	7	804	524	4	6
1763, 1763-g1	650	520	560	490	47	7	654	524	4	6
1767	1000	400	980	380	47	7	1004	404	4	6
1768, 1768-g1	900	520	850	490	47	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Comfort										
1752	650	520	560	490	52	7	654	524	4	6
1753, 1753-g1	650	520	560	490	52	7	654	524	4	6
1754	800	520	750	490	52	7	804	524	4	6
1755, 1755-g1	800	520	750	490	52	7	804	524	4	6
1757	800	370	760	340	52	7	804	374	4	6
1758, 1768-g1	900	520	850	490	52	7	904	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Induction Domino's										
3711	290	520	270	475	235	-	-	-	-	-
3753	380	520	370	490	54	7	384	524	6	8
3762	380	520	350	490	47	7	384	524	4	6
3773	380	520	370	490	121	7	384	524	4	6
3774	380	520	350	490	52	7	384	524	4	6
3784	380	520	350	490	52	7	384	524	4	6
	A	B	E	F	H	R ⁽¹⁾	S	T	K	P
Downdraft										
1821, 1821-g1, 1831, 1841	880	520	860	500	65	7	884	524	4	6
1871, 1881, 1881-g1	650	520	560	490	244	7	654	524	4	6
1851, 1861, 1861-g1	800	520	750	490	225	7	804	524	4	6
1866	900	520	750	490	225	7	904	524	4	6
40000	491	520	486	500	224	7	495	524	5	7
40002	872	520	852	500	224	7	876	524	5	7
40004	872	520	852	500	224	7	876	524	5	7
40006	872	520	862	500	224	7	876	524	6	8
40008	872	520	862	500	224	7	876	524	5	7
40000 + 40002-8	1364	520	1354	500	224	7	1368	524	6	8
40002-8 + 40002-8	1745	520	1735	500	224	7	1749	524	6	8
42110, 42120, 42120-g1	1180	520	1160	490	65	7	1184	524	4	6

(1) This is the standard radius finish. Contact your worktop supplier if you would prefer a smaller radius.

Gas hobs

Novy Gas Pro



Cooking profile

Intensity	 /  
-----------	---

Number of cooking zones

1	
2	
3	
4	
5	


Dimensions cooking zones (mm)

Dimensions	Ø230 / Ø270
------------	-------------

p. 276

 Normal use, basic cooking function, different zones with different power

  Normal use, extensive cooking functions, different zones with high power

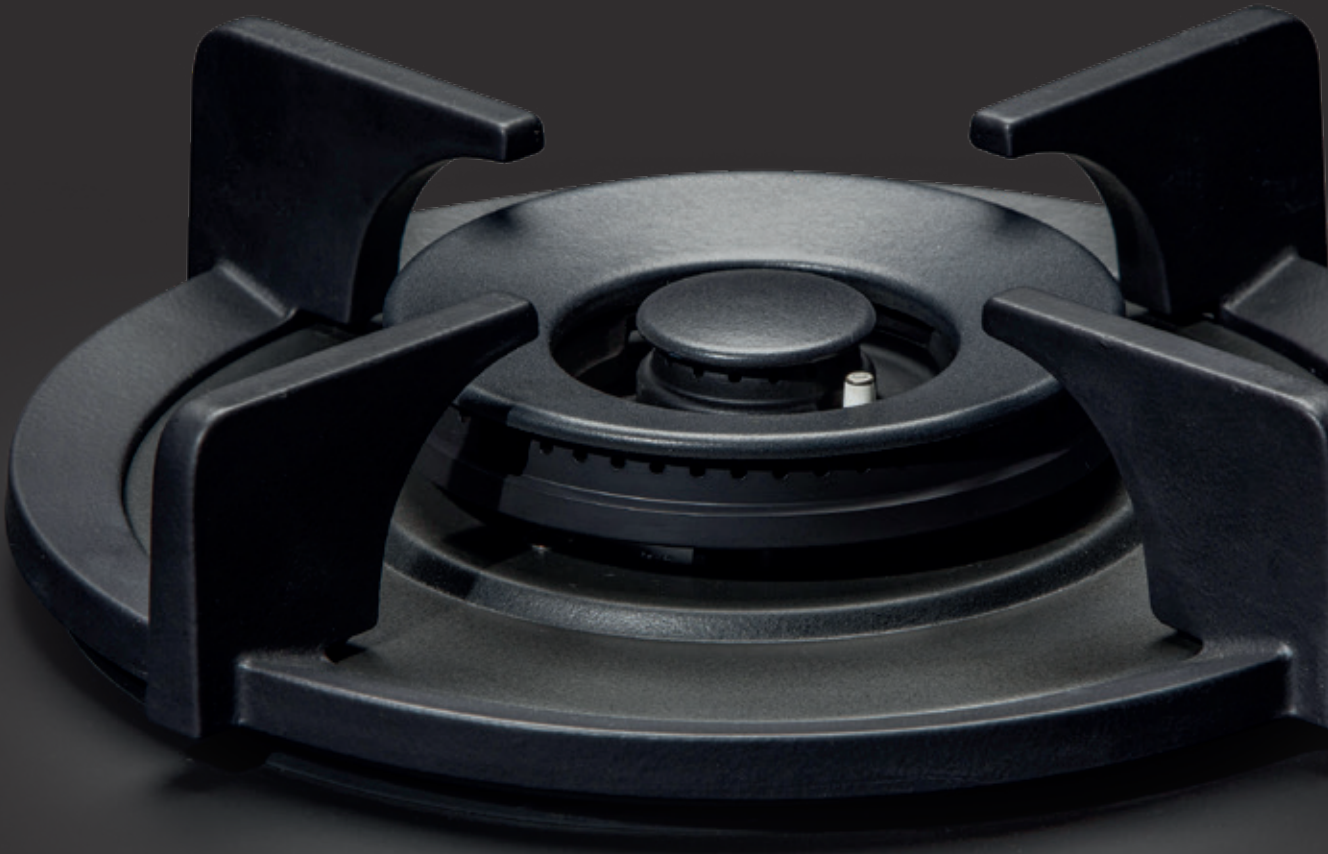



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Gas Pro

- **Gas Burners integrated** into worktop for clean look
- **Robust pot carriers** in timeless cast iron
- **Visual flame control**
- **Spacious layout** for large pots and pans
- **Freedom of choice** in fixed cooking setups



Model	Width (cm)	Number of zones	Max output (W)	Ref.	Price/pc
Altar Top black	30	1	3.000	56002	£1,569
Azuma Top black	30	1	5.000	56004	£1,809
Capital Top black	60	3	2.000, 3.000, 5.000	56006	£3,974
Cusin Top black	90	3	3.000, 2× 5.000	56008	£3,974
Dempo Top black	90	4	2.000, 3.000, 2× 5.000	56010	£4,329
Danau Top black	120	4	2.000, 3.000, 2× 5.000	56012	£4,329
Drum Top black	120	4	2.000, 3.000, 2× 5.000	56014	£4,329
Elbrus Top black	90	5	2× 2.000, 2× 3.000, 5.000	56016	£4,939

Do not use pans with a larger base diameter than the pan support. We recommend for the 2 and 3KW burners a pan with a maximum base diameter of 230 mm and for the 5KW burner a maximum base of 270 mm.

Video
Discover the stylish range
of powerful gas burners



Technische specificaties

				
	Altar top 56002 / black	Azuma Top 56004 / black	Capital Top 56006 / black	Cusin Top 56008 / black
Finish				
Colour	Black	Black	Black	Black
Cast iron pan support	•	•	•	•
Type of controls	Rotating button	Rotating button	Rotating button	Rotating button
Installation options				
Built-in	•	•	•	•
Functions				
Automatic spark ignition	•	•	•	•
Flame protection	•	•	•	•
Cooking zones				
Number of cooking zones	1	1	3	3
Cooking zone 1	Central	Central	Front left	Left
Power (W)	3000	5000	3000	5000
Cooking zone 2			Back left	Central
Power (W)			2000	3000
Cooking zone 3			Right	Right
Power (W)			5000	5000
Cooking zone 4				
Power (W)				
Cooking zone 5				
Power (W)				
Dimensions				
Dimensions (W×D×H) (mm)	213×503×89	213×503×89	533×503×89	853×403×89
Opening (B×D) (mm)	Check technical file	Check technical file	Check technical file	Check technical file
Weight (kg)	5,5	7,5	18,5	20,5
Technical details				
Total connected load	3000	5000	9800	13000
Supply voltage	230 V	230 V	230 V	230 V
Frequency	50	50	50	50
Connection cable	•	•	•	•
Accessories				
Support bar / 56 199 - £124 (1 set included as standard)	•	•	•	•
Wok ring / 93 005 - £309 (1 included as standard)		•	•	•

Technical data worktop

You will find detailed information on the installation and handling instructions on the Novy website.

	Min. thickness (mm)	Max. thickness (mm)
Worktop material		
Stainless steel, glass	4	35
Ceramic materials	10	35
Quartz composite (e.g. Caesarstone, Diresco, Unistone), Mineral Hybriq Surfaces (e.g. Silestone)	12	35
Ultracompact surface (e.g. Dekton)		
Natural stone (e.g. granite, marble)	30	35
Concrete, (massive) wood, laminate (HPL), solid surface	-	-

The worktop must be supported by all cabinet walls and rest fully on the cabinet structure. The guidelines of the kitchen manufacturer and/or the manufacturer of the kitchen worktop should always be strictly followed.

			
Dempo Top 56010 / black	Danau Top 56012 / black	Drum Top 56014 / black	Elbrus Top 56016 / black
Black	Black	Black	Black
•	•	•	•
Rotating button	Rotating button	Rotating button	Rotating button
•	•	•	•
•	•	•	•
4	4	4	5
Left	Left	Left	Front left
5000	5000	5000	3000
Central for	Center left	Center left	Back left
3000	3000	3000	2000
Center back	Center right	Center right	Central
2000	2000	2000	5000
Right	Right	Right	Front right
5000	5000	5000	3000
			Back right
			2000
853×503×89	1157×403×89	1157×503×89	853×503×89
Check technical file	Check technical file	Check technical file	Check technical file
25,5	25,5	25,5	29,5
14800	14800	14800	14600
230 V	230 V	230 V	230 V
50	50	50	50
•	•	•	•
•	•	•	•



Designer lighting

Novy Pendant



Novy Wall



Novy Shelf



Novy Shelf Pro



Length				
95 cm	☐	☐	☐	
125 cm	☐	☐	☐	☐
155 cm	☐	☐	☐	☐
185 cm	☐	☐	☐	☐
215 cm	☐	☐	☐	☐
245 cm	☐	☐	☐	☐
275 cm	☐	☐	☐	☐
305 cm	☐	☐	☐	☐
Colour				
Mineral White	☐	☐	☐	☐
Mineral Black	☐	☐	☐	☐
Operation				
Gesture Control	☐	☐	☐	
Gesture Control Pro				☐
Lighting				
Functional light	☐	☐	☐	☐
Ambient light	☐	☐	☐	☐



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Pendant

- **Next-generation pendant lamp**, ideal above a kitchen island
- **Simple Gesture Control** for intuitive operation
- **Dual lighting** with both top and bottom lighting for optimal ambience
- **Lighting adapted to your needs**: easily switch between functional light and ambient lighting
- **Dim-to-warm**: Colour temperature from 2,700 K to 4,000 K
- **Create the perfect atmosphere** with the ability to set the mood color
- **High light output** and true-to-life colours: perfect brightness and excellent colour rendering
- **Exclusive finishes**: Mineral Black with champagne accents or Mineral White with a silver-grey accent

	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Pendant 95	938	Mineral White	36	710101-p3	£1,149
Novy Pendant 125	1238	Mineral White	48	710201-p3	£1,199
Novy Pendant 155	1538	Mineral White	60	710301-p3	£1,249
Novy Pendant 185	1838	Mineral White	72	710401-p3	£1,299
Novy Pendant 215	2138	Mineral White	84	710501-p3	£1,349
Novy Pendant 245	2438	Mineral White	96	710601-p3	£1,399
Novy Pendant 275	2738	Mineral White	108	710701-p3	£1,449
Novy Pendant 305	3038	Mineral White	120	710801-p3	£1,499
Novy Pendant 95	938	Mineral Black	36	710102-p3	£1,149
Novy Pendant 125	1238	Mineral Black	48	710202-p3	£1,199
Novy Pendant 155	1538	Mineral Black	60	710302-p3	£1,249
Novy Pendant 185	1838	Mineral Black	72	710402-p3	£1,299
Novy Pendant 215	2138	Mineral Black	84	710502-p3	£1,349
Novy Pendant 245	2438	Mineral Black	96	710602-p3	£1,399
Novy Pendant 275	2738	Mineral Black	108	710702-p3	£1,449
Novy Pendant 305	3038	Mineral Black	120	710802-p3	£1,499

Technical drawings, see p. 300



Gesture Control
Lighting equipped with gesture control



Ambient light
Next to functional light, ambient light is also provided



Video
Gesture Control



Technical specifications

			
	Novy Pendant 95 710101-p3 Mineral White 710102-p3 Mineral Black	Novy Pendant 125 710201-p3 Mineral White 710202-p3 Mineral Black	Novy Pendant 155 710301-p3 Mineral White 710302-p3 Mineral Black
Functions			
Controls	Gesture Control	Gesture Control	Gesture Control
Lighting			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	648	972	1296
Colour ambient light	RGBW	RGBW	RGBW
Technical characteristics			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	938×31×80	1238×31×80	1538×31×80
Weight (kg)	2	2,3	2,7
Power cord position	Left / right	Left / right	Left / right
Power cord length (m)	6	5,7	5,4
Length of suspension cables (m)	4,5	4,5	4,5
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

					
	Novy Pendant 185 710401-p3 Mineral White 710402-p3 Mineral Black	Novy Pendant 215 710501-p3 Mineral White 710502-p3 Mineral Black	Novy Pendant 245 710601-p3 Mineral White 710602-p3 Mineral Black	Novy Pendant 275 710701-p3 Mineral White 710702-p3 Mineral Black	Novy Pendant 305 710801-p3 Mineral White 710802-p3 Mineral Black
	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1620	1944	2268	2592	2916
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1838×31×80	2138×31×80	2438×31×80	2738×31×80	3038×31×80
	3,1	3,5	3,9	4,3	4,7
	Left / right	Left / right	Left / right	Left / right	Left / right
	5,1	4,8	4,5	4,2	3,9
	4,5	4,5	4,5	4,5	4,5
	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120





NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Wall

- **Designer wall lighting** for the worktop
- **Simple Gesture Control** for intuitive operation
- **Dual lighting** with both top and bottom lighting for optimal ambience
- **Lighting adapted to your needs:** easily switch between functional light and ambient lighting
- **Dim-to-warm:** Colour temperature from 2,700 K to 4,000 K
- **Create the perfect atmosphere** with the ability to set the mood color
- **High light output** and true-to-life colours: perfect brightness and excellent colour rendering
- **Exclusive finishes:** Mineral Black with champagne accents or Mineral White with a silver-grey accent

Novy Wall / Designer lighting



286 – 287



Gesture Control
Lighting equipped with gesture control



Ambient light
Next to functional light, ambient light is also provided



	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Wall 95	940	Mineral White	36	740101	£999
Novy Wall 125	1240	Mineral White	48	740201	£1,049
Novy Wall 155	1540	Mineral White	60	740301	£1,099
Novy Wall 185	1840	Mineral White	72	740401	£1,149
Novy Wall 215	2140	Mineral White	84	740501	£1,199
Novy Wall 245	2440	Mineral White	96	740601	£1,249
Novy Wall 275	2740	Mineral White	108	740701	£1,299
Novy Wall 305	3040	Mineral White	120	740801	£1,349
Novy Wall 95	940	Mineral Black	36	740102	£999
Novy Wall 125	1240	Mineral Black	48	740202	£1,049
Novy Wall 155	1540	Mineral Black	60	740302	£1,099
Novy Wall 185	1840	Mineral Black	72	740402	£1,149
Novy Wall 215	2140	Mineral Black	84	740502	£1,199
Novy Wall 245	2440	Mineral Black	96	740602	£1,249
Novy Wall 275	2740	Mineral Black	108	740702	£1,299
Novy Wall 305	3040	Mineral Black	120	740802	£1,349

Technical drawings, see p. 300

Video
Gesture Control



ABOUT
NOVY

COOKER
HOOD
GUIDELINES

VENTING
HOBS

CEILING
UNITS

BUILT-IN
COOKER
HOODS

TELESCOPIC
COOKER
HOODS

WALL-
MOUNTED
COOKER
HOODS

ISLAND
COOKER
HOODS

COOKER
HOOD
ACCESSORIES

INDUCTION
HOBS

GAS HOBS

DESIGNER
LIGHTING

INFO

Technical specifications

			
	Novy Wall 95 740101 Mineral White 740102 Mineral Black	Novy Wall 125 740201 Mineral White 740202 Mineral Black	Novy Wall 155 740301 Mineral White 740302 Mineral Black
Functions			
Controls	Gesture Control	Gesture Control	Gesture Control
Lighting			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	972	1296	1620
Colour ambient light	RGBW	RGBW	RGBW
Technical characteristics			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	940×31×80	1240×31×80	1540×31×80
Weight (kg)	1,8	2,1	2,5
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

					
	Novy Wall 185 740401 Mineral White 740402 Mineral Black	Novy Wall 215 740501 Mineral White 740502 Mineral Black	Novy Wall 245 740601 Mineral White 740602 Mineral Black	Novy Wall 275 740701 Mineral White 740702 Mineral Black	Novy Wall 305 740801 Mineral White 740802 Mineral Black
	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1944	2268	2592	2916	3240
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1840×31×80	2140×31×80	2440×31×80	2740×31×80	3040×31×80
	2,8	3,2	3,5	3,9	4,2
	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120





NOVY

PREMIUM
INNOVATION
PRODUCT


Novy Shelf

- **Stylish wall shelf** with Gesture Control Pro option
- **Simple Gesture Control** for intuitive operation
- **Dual lighting** with both top and bottom lighting for optimal ambience
- **Lighting adapted to your needs:** easily switch between functional light and ambient lighting
- **Dim-to-warm:** Colour temperature from 2,700 K to 4,000 K
- **Create the perfect atmosphere** with the ability to set the mood color
- **High light output and true-to-life colours:** perfect brightness and excellent colour rendering
- **Exclusive finishes:** Mineral Black with champagne accents or Mineral White with a silver-grey accent

Novy Shelf / Designer lighting



290 – 291

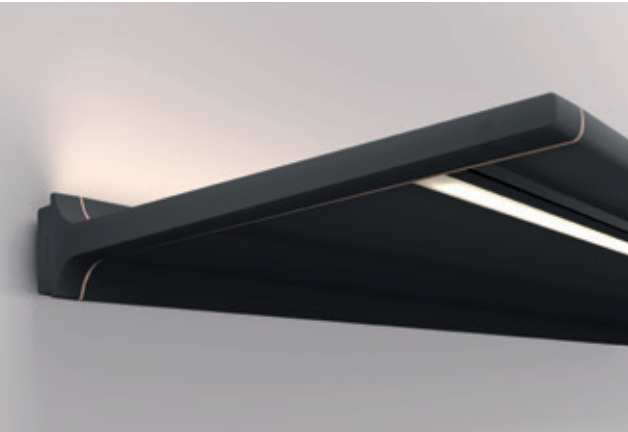

Gesture Control
Lighting equipped with gesture control



Ambient light
Next to functional light, ambient light is also provided



	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Shelf 95	940	Mineral White	36	720101	£1,299
Novy Shelf 125	1240	Mineral White	48	720201	£1,399
Novy Shelf 155	1540	Mineral White	60	720301	£1,499
Novy Shelf 185	1840	Mineral White	72	720401	£1,599
Novy Shelf 215	2140	Mineral White	84	720501	£1,699
Novy Shelf 245	2440	Mineral White	96	720601	£1,799
Novy Shelf 275	2740	Mineral White	108	720701	£1,899
Novy Shelf 305	3040	Mineral White	120	720801	£1,999
Novy Shelf 95	940	Mineral Black	36	720102	£1,299
Novy Shelf 125	1240	Mineral Black	48	720202	£1,399
Novy Shelf 155	1540	Mineral Black	60	720302	£1,499
Novy Shelf 185	1840	Mineral Black	72	720402	£1,599
Novy Shelf 215	2140	Mineral Black	84	720502	£1,699
Novy Shelf 245	2440	Mineral Black	96	720602	£1,799
Novy Shelf 275	2740	Mineral Black	108	720702	£1,899
Novy Shelf 305	3040	Mineral Black	120	720802	£1,999

Technical drawings, see p. 301

Video
Gesture Control



Technical specifications

	 Novy Shelf 95 720101 Mineral White 720102 Mineral Black	 Novy Shelf 125 720201 Mineral White 720202 Mineral Black	 Novy Shelf 155 720301 Mineral White 720302 Mineral Black
Functions			
Controls	Gesture Control	Gesture Control	Gesture Control
Lighting			
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	3174	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	972	1296	1620
Colour ambient light	RGBW	RGBW	RGBW
Technical characteristics			
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	940×320×65	1240×320×65	1540×320×65
Weight (kg)	5,1	7,8	9,3
Maximum load capacity* (kg)	27	36	45
Mains voltage (V) / Elektrical connection value (W)	230 / 36	230 / 48	230 / 60

	 Novy Shelf 185 720401 Mineral White 720402 Mineral Black	 Novy Shelf 215 720501 Mineral White 720502 Mineral Black	 Novy Shelf 245 720601 Mineral White 720602 Mineral Black	 Novy Shelf 275 720701 Mineral White 720702 Mineral Black	 Novy Shelf 305 720801 Mineral White 720802 Mineral Black
Functions					
Controls	Gesture Control	Gesture Control	Gesture Control	Gesture Control	Gesture Control
Lighting					
Type of functional light	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	6348	7406	8464	9522	10580
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95	≥95	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	1944	2268	2592	2916	3240
Colour ambient light	RGBW	RGBW	RGBW	RGBW	RGBW
Technical characteristics					
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	1840×320×65	2140×320×65	2440×320×65	2740×320×65	3040×320×65
Weight (kg)	11,1	12,8	14,6	16,3	18
Maximum load capacity* (kg)	54	63	72	81	90
Mains voltage (V) / Elektrical connection value (W)	230 / 72	230 / 84	230 / 96	230 / 108	230 / 120

* Depending on load-bearing wall and fixing material used



NOVY

PREMIUM
INNOVATION
PRODUCT

Novy Shelf Pro

- **Stylish wall shelf** with Gesture Control Pro option
- **Simple Gesture Control Pro** for intuitive operation
- **Dual lighting** with both top and bottom lighting for optimal ambience
- **Lighting adapted to your needs:** easily switch between functional light and ambient lighting
- **Dim-to-warm:** Colour temperature from 2,700 K to 4,000 K
- **Create the perfect atmosphere** with the ability to set the mood color
- **High light output and true-to-life colours:** perfect brightness and excellent colour rendering
- **Exclusive finishes:** Mineral Black with champagne accents or Mineral White with a silver-grey accent

Novy Shelf Pro / Designer lighting



294 – 295



Gesture Control Pro
Extension to Gesture Control to adjust beam width



Ambient light
Next to functional light, ambient light is also provided



	Length (mm)	Colour	Max output (W)	Ref.	Price/pc
Novy Shelf Pro 125	1240	Mineral White	65	730201	£1,799
Novy Shelf Pro 155	1540	Mineral White	65	730301	£1,899
Novy Shelf Pro 185	1840	Mineral White	77	730401	£1,999
Novy Shelf Pro 215	2140	Mineral White	90	730501	£2,099
Novy Shelf Pro 245	2440	Mineral White	104	730601	£2,199
Novy Shelf Pro 275	2740	Mineral White	115	730701	£2,299
Novy Shelf Pro 305	3040	Mineral White	128	730801	£2,399
Novy Shelf Pro 125	1240	Mineral Black	65	730202	£1,799
Novy Shelf Pro 155	1540	Mineral Black	65	730302	£1,899
Novy Shelf Pro 185	1840	Mineral Black	77	730402	£1,999
Novy Shelf Pro 215	2140	Mineral Black	90	730502	£2,099
Novy Shelf Pro 245	2440	Mineral Black	104	730602	£2,199
Novy Shelf Pro 275	2740	Mineral Black	115	730702	£2,299
Novy Shelf Pro 305	3040	Mineral Black	128	730802	£2,399

Technical drawings, see p. 301

Video
Gesture Control Pro



Technical specifications

	 Novy Shelf Pro 125 730201 Mineral White 730202 Mineral Black	 Novy Shelf Pro 155 730301 Mineral White 730302 Mineral Black
Functions		
Controls	Gesture Control Pro	Gesture Control Pro
Lighting		
Type of functional light	LED / dimmable	LED / dimmable
Gross luminous flux functional light (Lm)	4232	5290
Colour functional light (K)	2.700 - 4.000	2.700 - 4.000
Colour rendering index (CRI)	≥95	≥95
Type of ambient light	LED / dimmable	LED / dimmable
Gross luminous flux ambient light (Lm)	1296	1620
Colour ambient light	RGBW	RGBW
Technical characteristics		
Colour	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
Dimensions (L×W×H) (mm)	1240×320×65	1540×320×65
Weight (kg)	7,8	9,3
Maximum load capacity* (kg)	36	45
Mains voltage (V) / Elektrical connection value (W)	230 / 65	230 / 65

	 Novy Shelf Pro 185 730401 Mineral White 730402 Mineral Black	 Novy Shelf Pro 215 730501 Mineral White 730502 Mineral Black	 Novy Shelf Pro 245 730601 Mineral White 730602 Mineral Black	 Novy Shelf Pro 275 730701 Mineral White 730702 Mineral Black	 Novy Shelf Pro 305 730801 Mineral White 730802 Mineral Black
	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro	Gesture Control Pro
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	6348	7406	8464	9522	10580
	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000	2.700 - 4.000
	≥95	≥95	≥95	≥95	≥95
	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable	LED / dimmable
	1944	2268	2592	2916	3240
	RGBW	RGBW	RGBW	RGBW	RGBW
	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)	Mineral White (≈RAL 9016) / Mineral Black (≈RAL 9005)
	1840×320×65	2140×320×65	2440×320×65	2740×320×65	3040×320×65
	11,1	12,8	14,6	16,3	18
	54	63	72	81	90
	230 / 77	230 / 90	230 / 104	230 / 115	230 / 128

* Depending on load-bearing wall and fixing material used




Novy Pendant 305 - Novy Panorama 90

Novy Shelf 275

Technical drawings


Novy Pendant

710101-p3 / 710201-p3 / 710301-p3 / 710401-p3 / 710501-p3 / 710601-p3 / 710701-p3 / 710801-p3
710102-p3 / 710202-p3 / 710302-p3 / 710402-p3 / 710502-p3 / 710602-p3 / 710702-p3 / 710802-p3

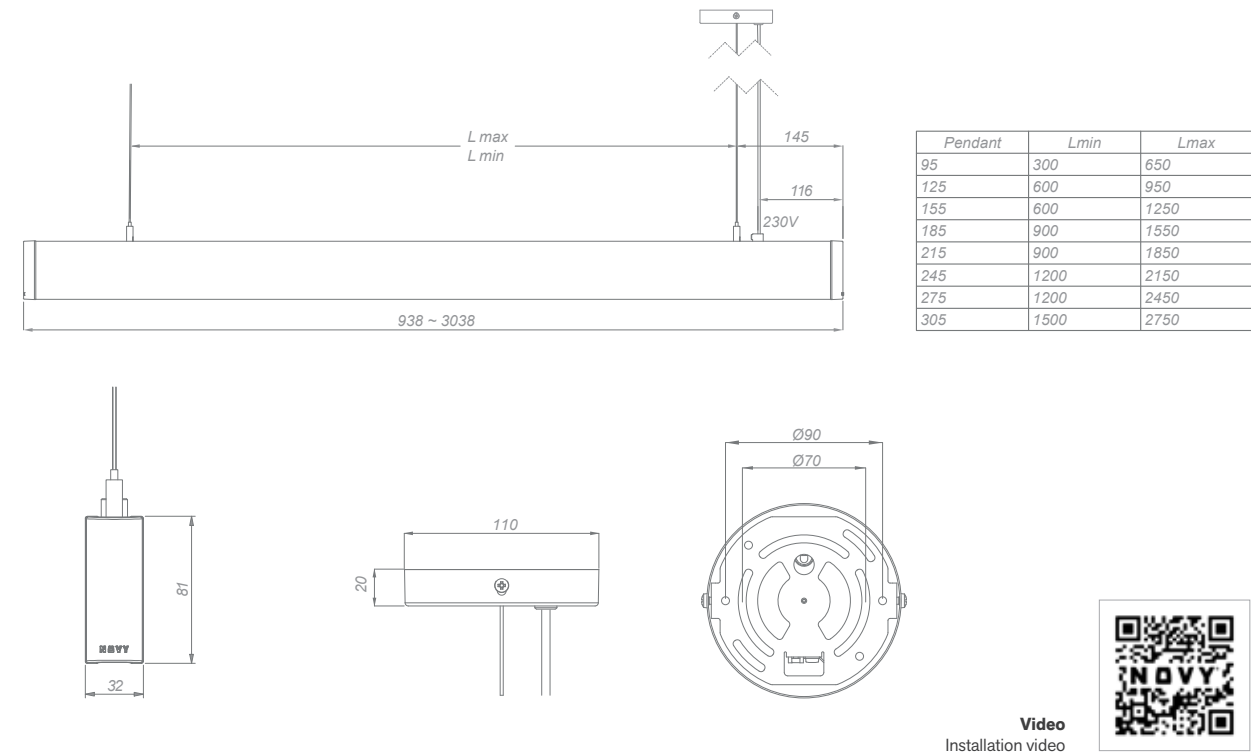

Novy Wall


740101 / 740201 / 740301 / 740401 / 740501 / 740601 / 740701 / 740801
740102 / 740202 / 740302 / 740402 / 740502 / 740602 / 740702 / 740802

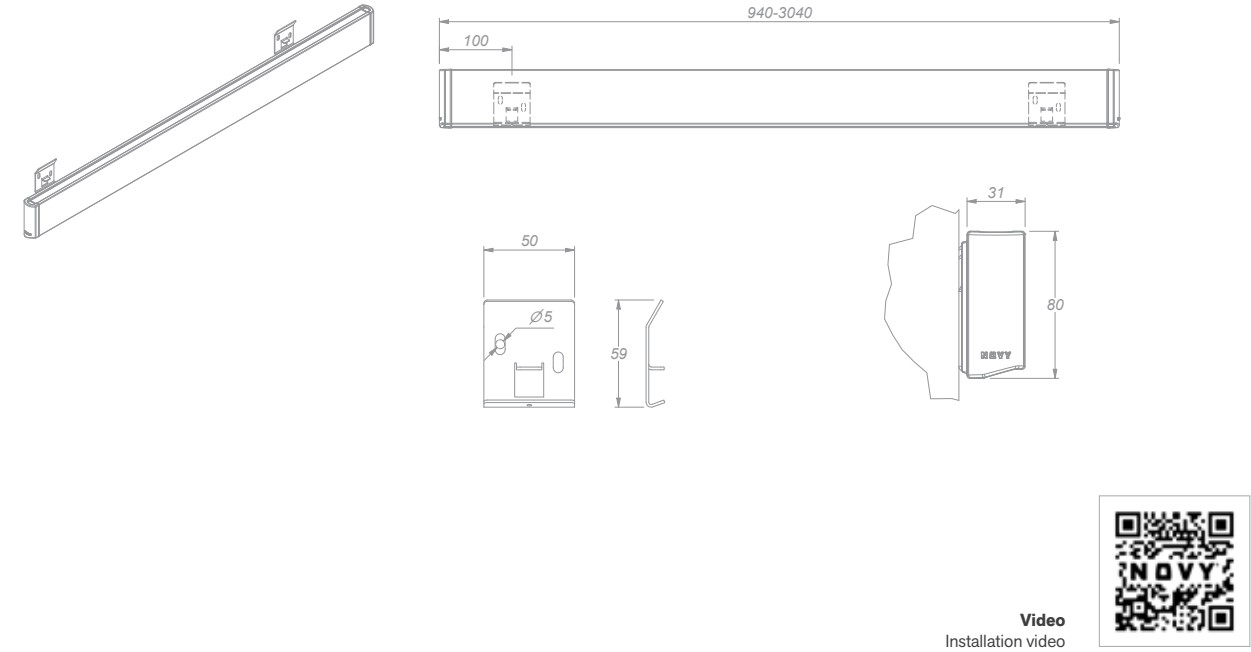

Technical drawings

Novy Shelf / Novy Shelf Pro

720101 / 720201 / 720301 / 720401 / 720501 / 720601 / 720701 / 720801
720102 / 720202 / 720302 / 720402 / 720502 / 720602 / 720702 / 720802
730201 / 730301 / 730401 / 730501 / 730601 / 730701 / 730801
730202 / 730302 / 730402 / 730502 / 730602 / 730702 / 730802

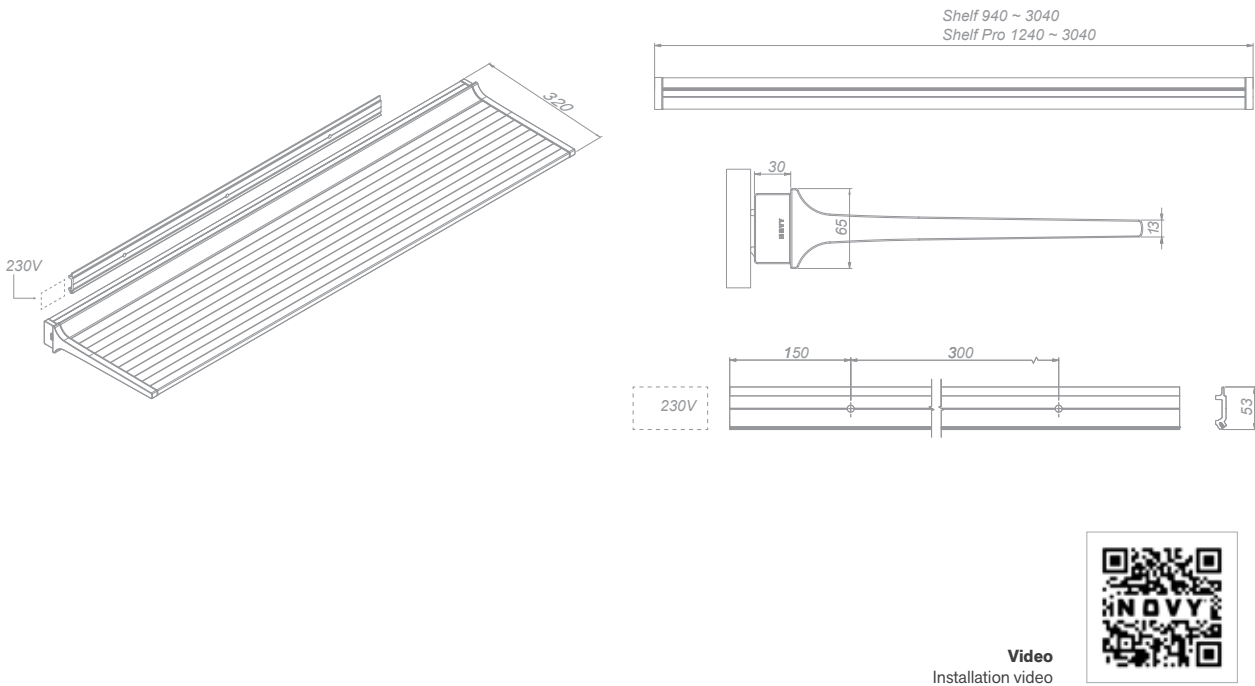



Info

International recognition	p. 304
Premium Innovation Products	p. 306
Cooker hoods	p. 308
Hobs	p. 309
Lighting	p. 311




International recognition

For many years, Novy has been building a strong reputation for innovation and design. This commitment is regularly rewarded with prestigious international awards. Several products from our range have won prizes in recent years, reflecting our dedication to both technological innovation and aesthetic refinement.


The first international recognition came in 2016 and 2018, when several types of downdraft extraction were awarded the **Red Dot Award** for Product Design. Later, the Novy Panorama received the **Global Innovation Award**, while the Novy Easy was recognized for its user-friendliness and smart functionality. The Novy Phantom collected multiple prizes, including a **Red Dot Design Award** (2022), the **Kitchen Innovation Award**, the **Big See Award** (2023) and the iF Design Award. The Novy Pureline Pro (Compact) was also granted the **iF Design Award**. The Novy Shelf Pro was honored with a **Red Dot Design Award** in 2023, and our latest innovation, the Novy Undercover, received the same distinction in 2025.

In addition, our products have been awarded multiple times at internationally renowned trade fairs such as KBB Birmingham, Esprit Meuble in Paris, and the KBIS show in Las Vegas.

These successive recognitions emphasize our mission: to create premium kitchen solutions that combine technical excellence with timeless design.



red**dot** winner 2025
kitchen appliances design



BIG SEE
Product Design
Award 2023
Winner



red**dot** winner 2016
winner 2018
winner 2022
winner 2023
winner 2025

Premium Innovation Products

Novy's dedication to innovation has led to a new generation of products. Technologically sophisticated, they set the tone in relation to aesthetics, ease of use, simplicity and, of course, silence.



Novy Cloud



Due to their innovative and progressive features, these products are known as Novy Premium Innovation Products. You can recognise these products from the **Premium Innovation logo**.

Novy Premium Partners

To support these products, Novy has decided to collaborate with **a selection of partners**. They receive extensive training and can offer you the expertise and advice you need to make the right choices. This is how Novy and its Premium Partners guarantee maximum comfort for your dream kitchen.

Cooker hood icons

	Ecosmart Extra quiet, super-efficient, longlasting and energy friendly products.		Design filter A filter with a modern and elegant design.
	Cooker hoods with a motor (direct extraction) The most common model is a cooker hood with an exhaust to the outside.		Perimeter extraction Placing a base plate under the cooker hood concentrates the extraction around the edges. This small gap speeds up the extraction. The smaller the area, the faster the airflow. This acceleration enhances the efficiency of the extraction system.
	Remote control These models come with a remote control, the other cooker hoods can also be fitted with them, by ordering an extra kit.		
	InTouch InTouch allows you to control your Novy cooker hood from your Novy induction hob.		Click&Fix A simple construction using a click system whereby the cooker hood can be clicked into place, after which only 4 screws need to be tightened.
	Installation height The installation height is the distance between the hob and the cooker hood. This height is extremely important for the optimum operation of the cooker hood. The advised installation heights are shown for each model.		Cubic Motor A square motor housing which can be installed remotely. The housing can be turned in any direction so that the exhaust direction can be chosen depending on the situation. This motor is designed for inside use.
	Tower exhaust system Optimal extraction at the height of the pots.		Recirculation Sometimes a cooker hood with an external exhaust isn't possible for technical reasons or isn't permitted. A recirculation cooker hood is one which returns the filtered cooking fumes back into the room. The grease in the fumes is filtered by the grease filter and the odours are absorbed by a filter with activated carbon (a monoblock filter). Damp air is not eliminated in the filter, but can be removed by the room's ventilation system. Most cooker hoods can be fitted with a recirculation accessory.
	Tower exhaust system Optimal extraction at the height of the pots, extraction on both sides of the tower.		
	Integrated extraction Powerful extraction by intergrated cooker hood.		
	Automatic speed control The Novy Sense sensor provides automatic speed control when cooking fumes and odour are detected.		
	Novy Connect Thanks to the Novy Connect App you can control your Novy device via your smartphone or tablet. With the Novy Connect App you can not only record your preferences, but also consult information and indication for the maintenance of your grease and/or carbon filter.		Ambient light In addition to the functional light that is provided on all cooker hoods (with the exception of Maxi Pureline and Pureline without lighting), extra ambient light is also provided on the following models: Mood, Cloud, Phantom, Pureline Pro (Compact). This light is dimmable and the colour temperature can be adjusted to the atmosphere you desire (with the exception of Phantom).

Hob icons

	Chef function  The cream of the crop is the Chef function, allowing you to link the Bridge zones automatically at the push of a button. The right-hand zone in setting 9 is for intensive cooking or baking. The centre zone in setting 6 is for simmering and the left-hand zone in setting 4 is to keep dishes warm.		Grill function  When using this function the Flexzone function is automatically activated to create a larger cooking surface. This function allows you to grill in the most ideal conditions. See Induction Pro and Power.
	Power and Super Power  Each zone has its own Power function, which boosts power considerably. This function is ideal for f.e. boiling large quantities of water.		Pot Move function  By engaging the Pot Move function in the Pro range, you can move pots and pans to another zone, while the settings are automatically maintained.
	Keep warm function  The keep warm function makes it very easy to maintain a constant temperature of 70°C (or 94°C on specific models).		Timer and independent cooking timer  Each zone has a separate timer and the hob is also fitted with an independent cooking timer.
	Stop & Go  Stop & Go can make sure that the power supply can be temporarily switched off. If you touch this control within 10 minutes, all the previously set levels are reinstated.		Count-up timer In the Pro range, each zone has a separate count-up timer which starts counting when a zone is switched on. It serves as an additional reminder whenever you choose not to set a timer yourself.
	Flexzone  The bridge function allows you to link two adjoining zones so that you can control them in one movement. Very handy for large pots and pans.		Automatic boiling function The contents of the pan are first brought to the boil for a set time and then the cooking process continues at a set lower level.

	Glossy black glass The glass lets no light pass through, which results in an even black cooking surface without being able to see inside the device. The glossy finish creates a premium look that suits any kitchen perfectly.		Wipe Guard Lock your controls with Wipe Guard, so that the hob can be cleaned easily.
	Matte black glass The matte glass creates a smooth, contemporary and modern look. Its easy-to-clean surface helps conceal signs of use, keeping the hob looking neat day after day.		Slider control With the slider control you only need to slide your finger over the control to achieve the desired level. The level can also be directly selected.
	Touch Control All induction hobs are simple and discreet to operate. Most of the hobs have a combination of Touch Control and slider control.		Safe When the pan is removed only the contact heat of the pan remains. The residual heat cools down very quickly. If a zone is accidentally turned on but there is no pan on the zone, nothing happens. The hob is also equipped with additional safety features: - residual heat indicator - overheating safety - boil over safety - safety shut-off (when the device is left on for a long time) - child lock
	Cooking zone layout Cooking zone layout, zones of different power and sizes.		
	Cooking zone layout Cooking zone layout, where there are 2 octagonal zones on the left side for more flexibility and 2 powerfull round		
	Cooking zone layout Cooking zone layout, with octagonal zones for maximum flexibility and cooking area.		

Lighting

	Gesture Control  Our lights with Gesture Control (GC) are fitted with a single sensor. The location of the sensor is indicated with an icon in the centre of the fitting. You can switch the light on and off, dim it or adjust the atmosphere by changing the direction of the light (upwards or downwards) using a simple gesture under the sensor. You can also change the colour when the light is in ambient mode.		Ambient light In addition to the functional light, extra ambient light is also provided. This ambient light is dimmable and the colour temperature can be adjusted to the atmosphere you desire.
	Gesture Control Pro  The light objects equipped with Gesture Control Pro have smart sensors fitted along the length of the Shelf to enable you to alter the width and position of the light beam in addition to all of the features of the standard Gesture Control (GC). What if you don't want the light to shine along the entire length of the lamp but only where you are drinking your wine, working or reading your newspaper? Simply drag the light beam with your hand to where you want it.		



Novy Ltd
c/o AGA Rangemaster Ltd
Meadow Lane, Long Eaton
Derbyshire NG10 2GD

Appliance Sales
Tel: 0115 946 4000
Email: novyorders@agarangemaster.co.uk

Premier Partner Aftersales
Tel: 01952 642013 option 1 for NOVY

www.novy.com/en-gb

Footnotes

The prices mentioned are recommended retail prices, from 01.03.2026 to 31.12.2026. For the current price list, scan the QR code on the inside of the cover. Prices only for sales in the UK, installation not included. Novy reserves the right to adjust pricing without prior notice and change model design.

Characteristics of the products on condition of changes or printing errors. All colors in this catalogue can only be represented approximately. The copy is not binding.



