

Island mounted
Mood 108 cm
White

EAN 5414425075508



Functions & features

▪ Control method	Remote control
▪ Number of speeds	4
▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Standard, Monoblock
▪ InTouch function	Standard
▪ Auto stop	▪
▪ Delayed switch off (minutes)	30
▪ Number of grease filters	4
▪ Grease filter	7550030
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪

Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	1080 x 246 x -
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	1080 x 246 x 370 - 370
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	650 - 850
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 850
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 850
▪ Position exhaust	Top

Lighting





▪ Functional lighting type	Led
▪ Ambient lighting type	Led
▪ Dimmable light	▪
▪ Soft-ON/OFF	▪
▪ Number of ambient lights	1
▪ Total energy consumption functional light (W)	32
▪ Total energy consumption ambient light (W)	32
▪ Color functional light	2700-5000
▪ Color ambient light	2700-5000

Airflow and noise level

▪ Free airflow (m ³ /h)	1010
▪ Airflow (m ³ /h) measured according to EN 61591	
▪ Sound regulation according to EN 60704-2-13	
▪ Airflow speed 1 (m ³ /h)	324
▪ Airflow speed 2 (m ³ /h)	432
▪ Airflow speed 3 (m ³ /h)	534
▪ Airflow speed 4 (m ³ /h)	661
▪ Sound pressure speed 1 (dB(A)) / Sound power speed 1 (dB(A))	41 / 53
▪ Sound pressure speed 2 (dB(A)) / Sound power speed 2 (dB(A))	47 / 59
▪ Sound pressure speed 3 (dB(A)) / Sound power speed 3 (dB(A))	52 / 64
▪ Sound pressure speed 4 (dB(A)) / Sound power speed 4 (dB(A))	57 / 69

Technical specifications

▪ Maximum power	202
▪ Voltage (V)	220-230
▪ Frequency (Hz)	50
▪ Net weight (kg)	35,5

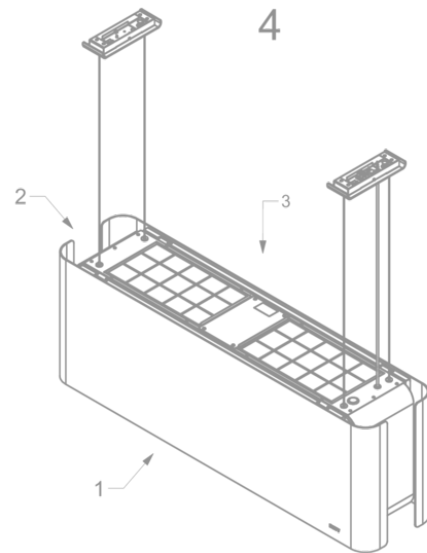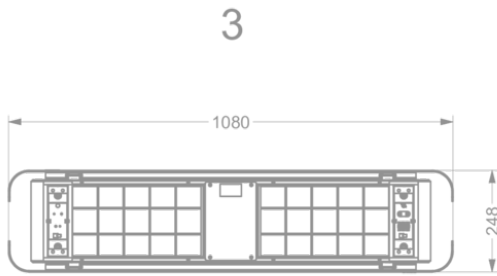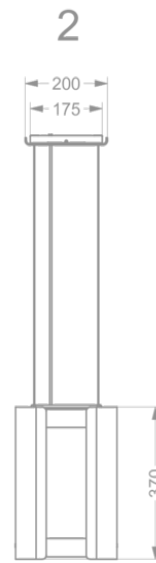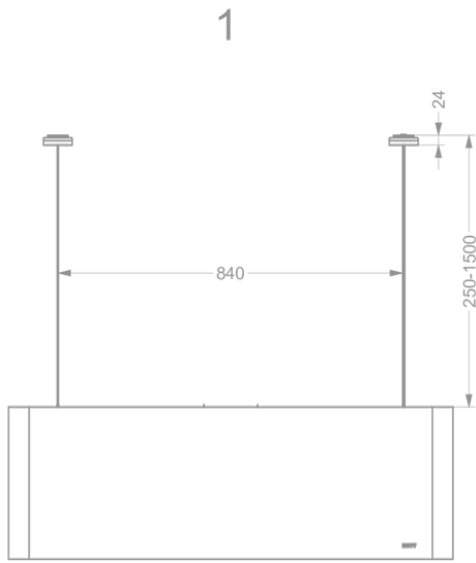

Installation accessories

Back panel & chimney extensions

- 7550100 Kit extended cable (4x3,5m)

Additional accessories

- 7550500 Ceiling connection plate white for Mood 7550

